



### Characteristics

External dimensions : 800 X 925 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top


2 open burners on left  
 removable burners with pilot light 2x6kw  
 Burner griddles in stainless steel, dimensions : 300x600  
 Stamped tank & cleaning tray  
 cast iron hot plate in 2 parts Dim : 500x600  
 Plots to spread the heat  
 Fireplace in brick refractory with  
 protective shell of cast iron, central burner  
 removable of 8kW  
 cleaning tray under the plate  
 Security by thermocouple with pilotlight  
 secured and protected commands

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 800x724x650  
 Front without any visible screw  
 Dimension of the retort : 650x530x280  
 Walls insulated by mineral fibers  
 aluminium steam barrier  
 Power 5.1kW thermostat 50 à 300°C  
 Commutateur et Lighting indicator  
 Reinforced stainless steel resistances located  
 all around top and bottom  
 heating together or separately  
 Removable steel bottom 6 mm thickness  
 stainless steel lateral walls  
 with levels holding griddles  
 Door to double wall insulated and balanced  
 Provided with one stainless steel griddle GN2/1

### Options :

gas connection kit for hose per device (X901405)  
 electric ignition gas burner each other gas burner (X901502)

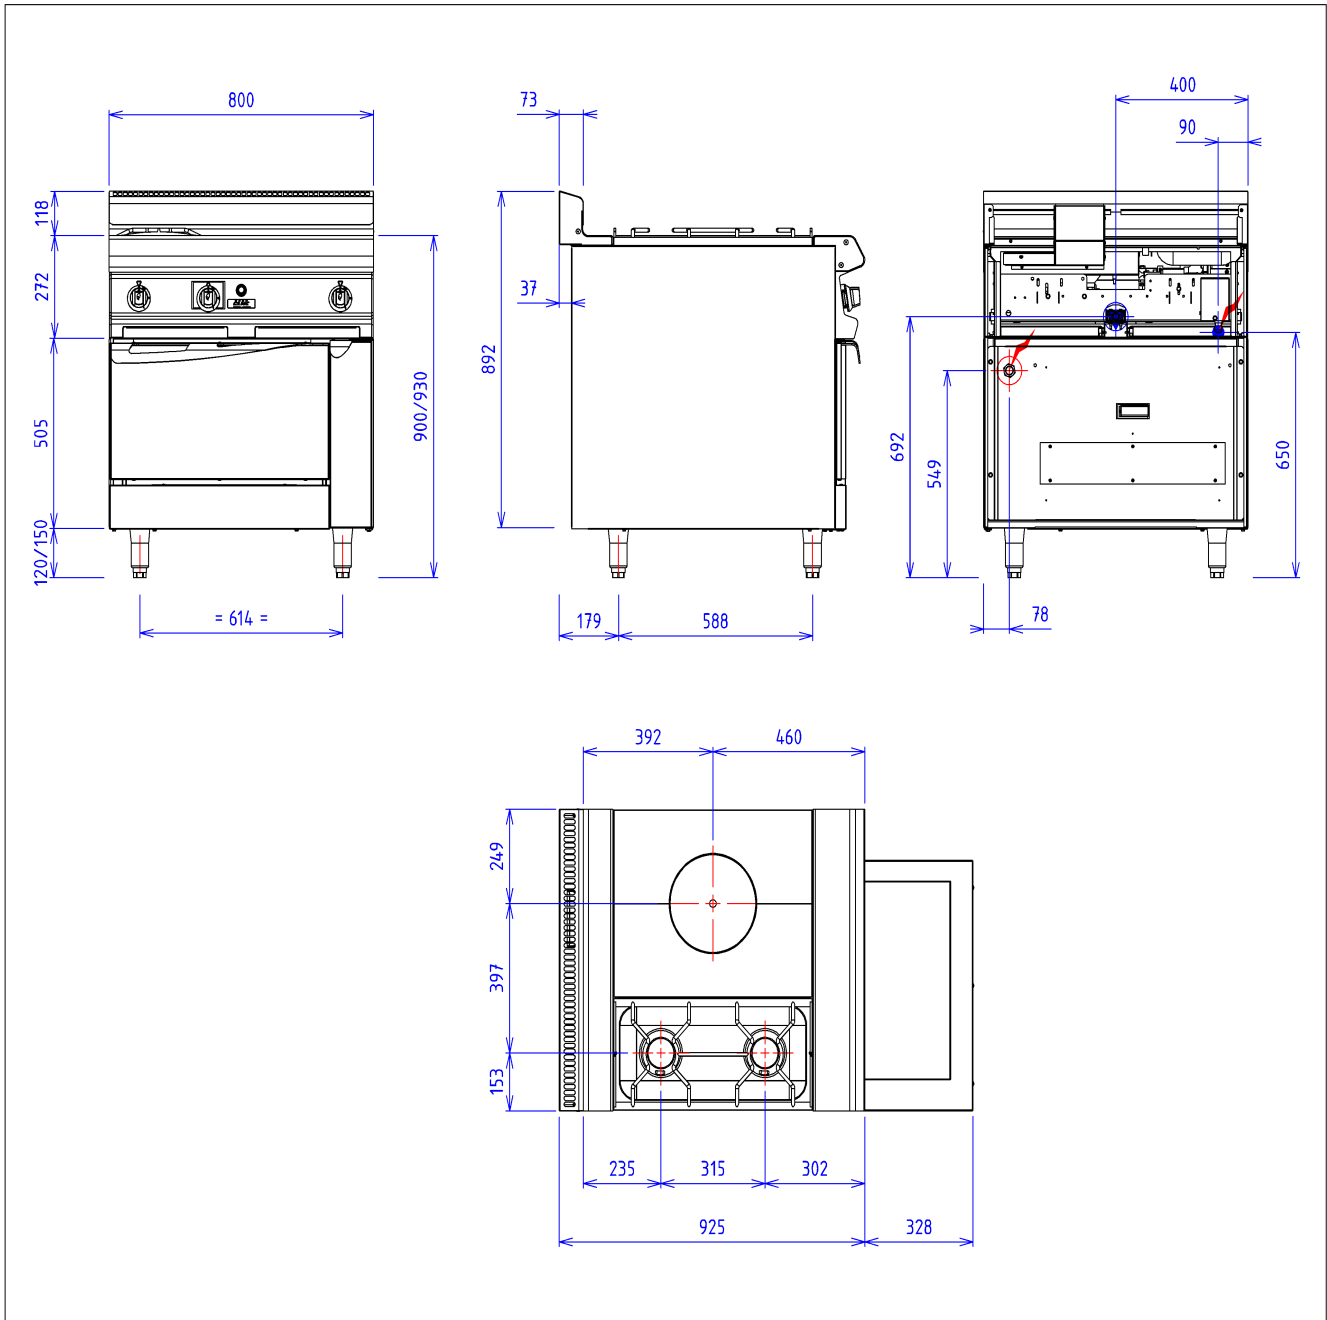

## GAS



Gas power : 20kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

## ELECTRIC



Electric power : 5.10kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting

: 400V THREE phases

230V SINGLE( Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335