



Characteristics

External dimensions : 1000 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


2 open burners on right
 removable burners with pilot light 2x9kw
 Burner griddles in stainless steel, dimensions : 400x600
 Stamped tank & cleaning tray
 cast iron hot plate in 2 parts Dim : 600x600
 Plots to spread the heat
 Fireplace in brick refractory with
 protective shell of cast iron, central burner
 removable of 8kW
 cleaning tray under the plate
 Security by thermocouple with pilotlight
 secured and protected commands

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 1000x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 5.1kW thermostat 50 à 300°C
 Commutateur et Lighting indicator
 Reinforced stainless steel resistances located
 all around top and bottom
 heating together or separately
 Removable steel bottom 6 mm thickness
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1

Options :

water bowl for burner 9kw (X901404)
 gaz connection kit for hose per device (X901405)
 electric ignition gas burner each other gas burner (X901502)

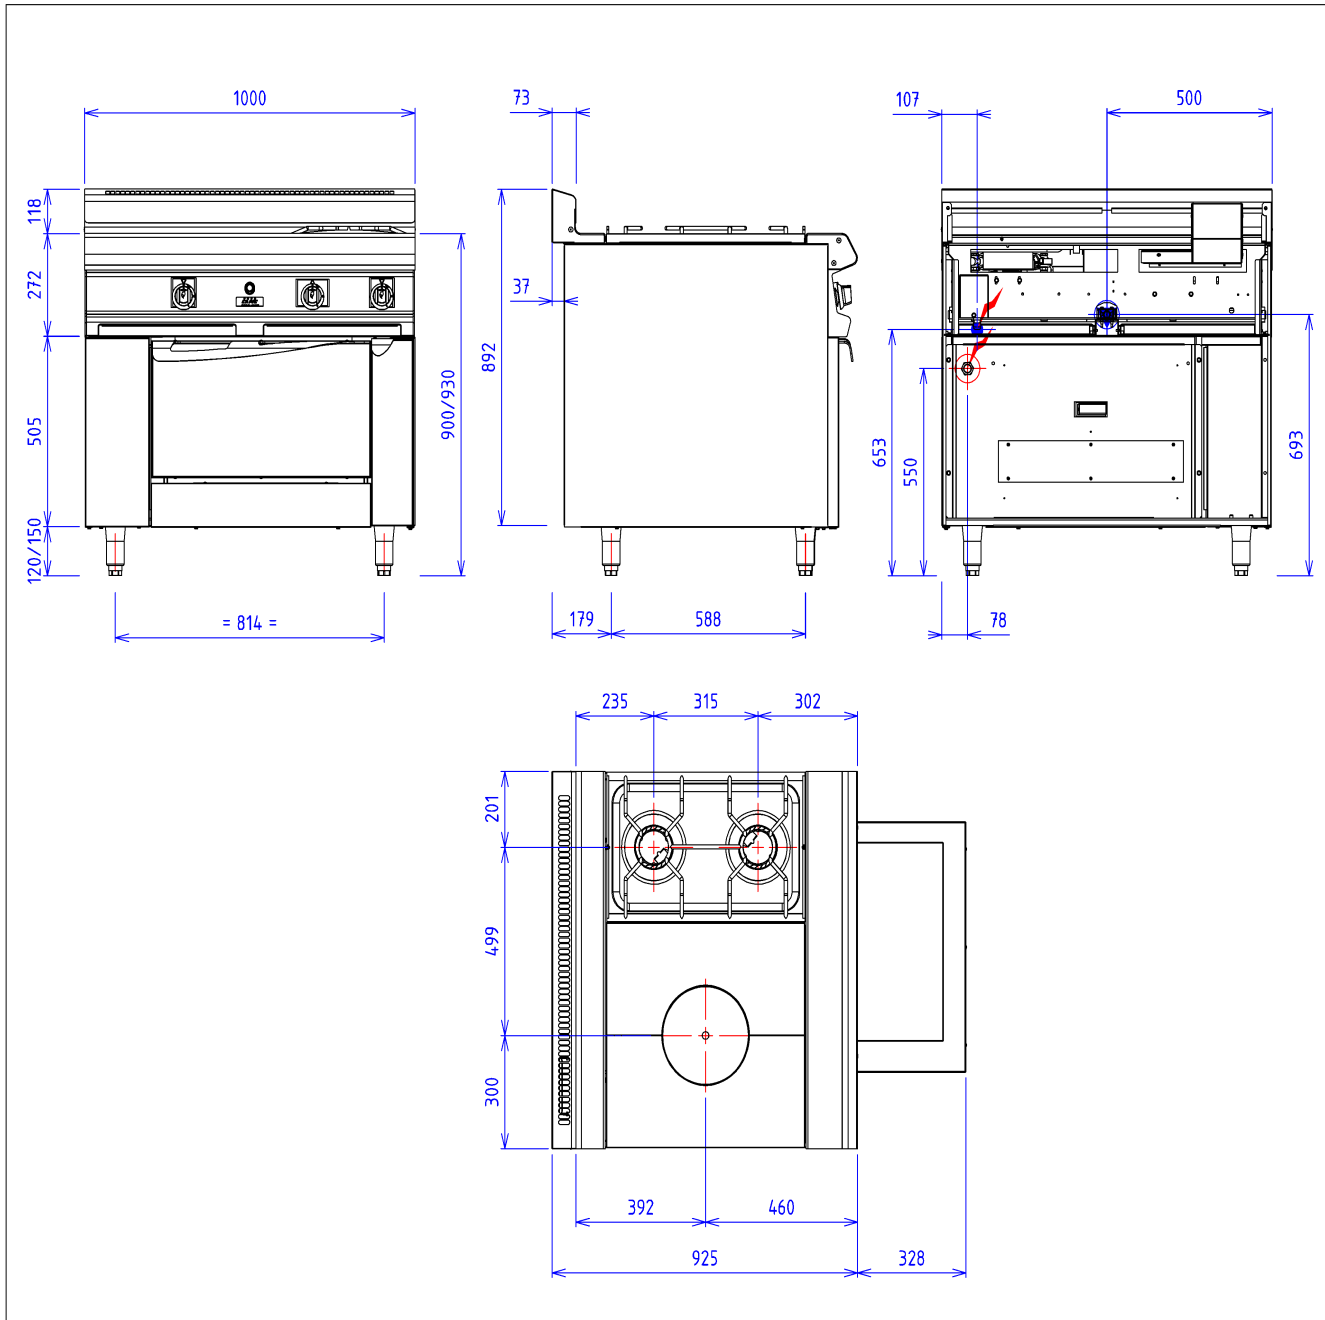

GAS



Gas power : 26kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 5.10kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting

: 400V THREE phases

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335