



### Characteristics

External dimensions : 1000 X 925 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top


2 open burners on right  
 removable burners with pilot light 2x9kw  
 Burner griddles in stainless steel, dimensions : 400x600  
 Stamped tank & cleaning tray  
 cast iron hot plate in 2 parts Dim : 600x600  
 Plots to spread the heat  
 Fireplace in brick refractory with  
 protective shell of cast iron, central burner  
 removable of 8kW  
 cleaning tray under the plate  
 Security by thermocouple with pilotlight  
 secured and protected commands

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 1000x724x650  
 Front without any visible screw  
 Dimension of the retort : 650x530x280  
 Walls insulated by mineral fibers  
 aluminium steam barrier  
 Power 10 kW thermostat 50 à 300°C  
 Removable steel bottom 6 mm thickness  
 Security pilot and thermocouple  
 stainless steel lateral walls  
 with levels holding griddles  
 Door to double wall insulated and balanced  
 Provided with one stainless steel griddle GN2/1

### Options :

water bowl for burner 9kw (X901404)  
 gaz connection kitfor hose per device (X901405)  
 electric ignition gas burnereach other gas burner (X901502)

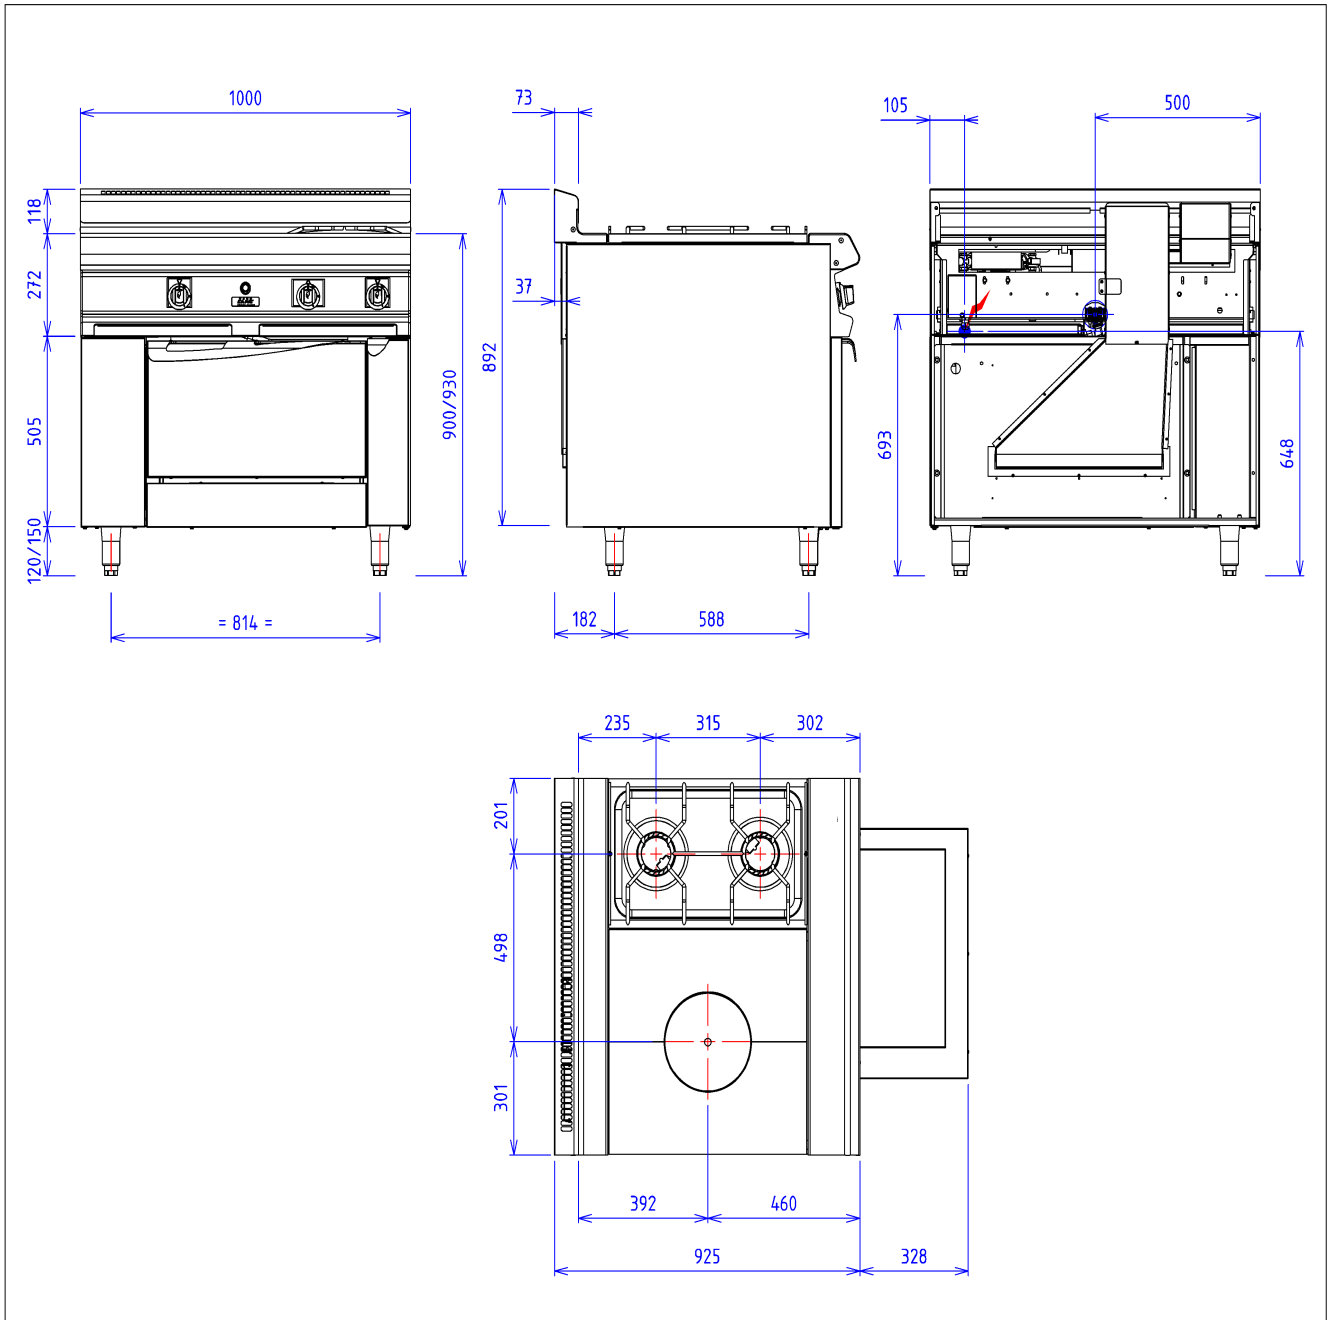

## GAS



Gas power : 36kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

## ELECTRIC



Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE( Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335