



### Characteristics

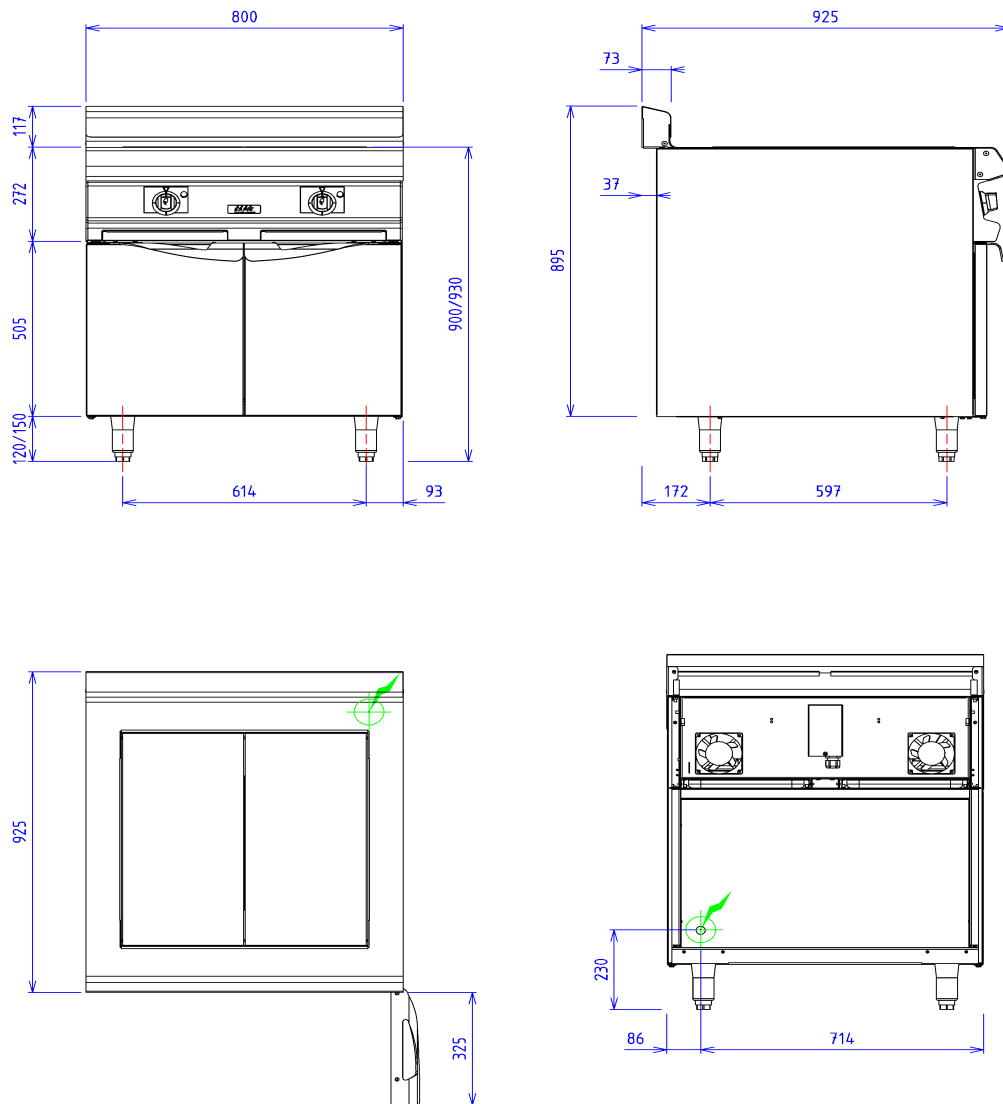
External dimensions : 800 X 925 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top

2 cast iron rectangular electric plates 300x600  
 Power : 2x5 kW  
 Controlled by commutator 3 speeds  
 cleaning drawer

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 800x724x650  
 Interior dimensions : 600x656x380  
 intermediate shelf  
 Front without any visible screw  
 Double skin doors  
 Power 1,5 kW  
 Regulation by thermostat 0-85°C

**ELECTRIC**

Electric power : 11.50kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting  
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335