



Characteristics

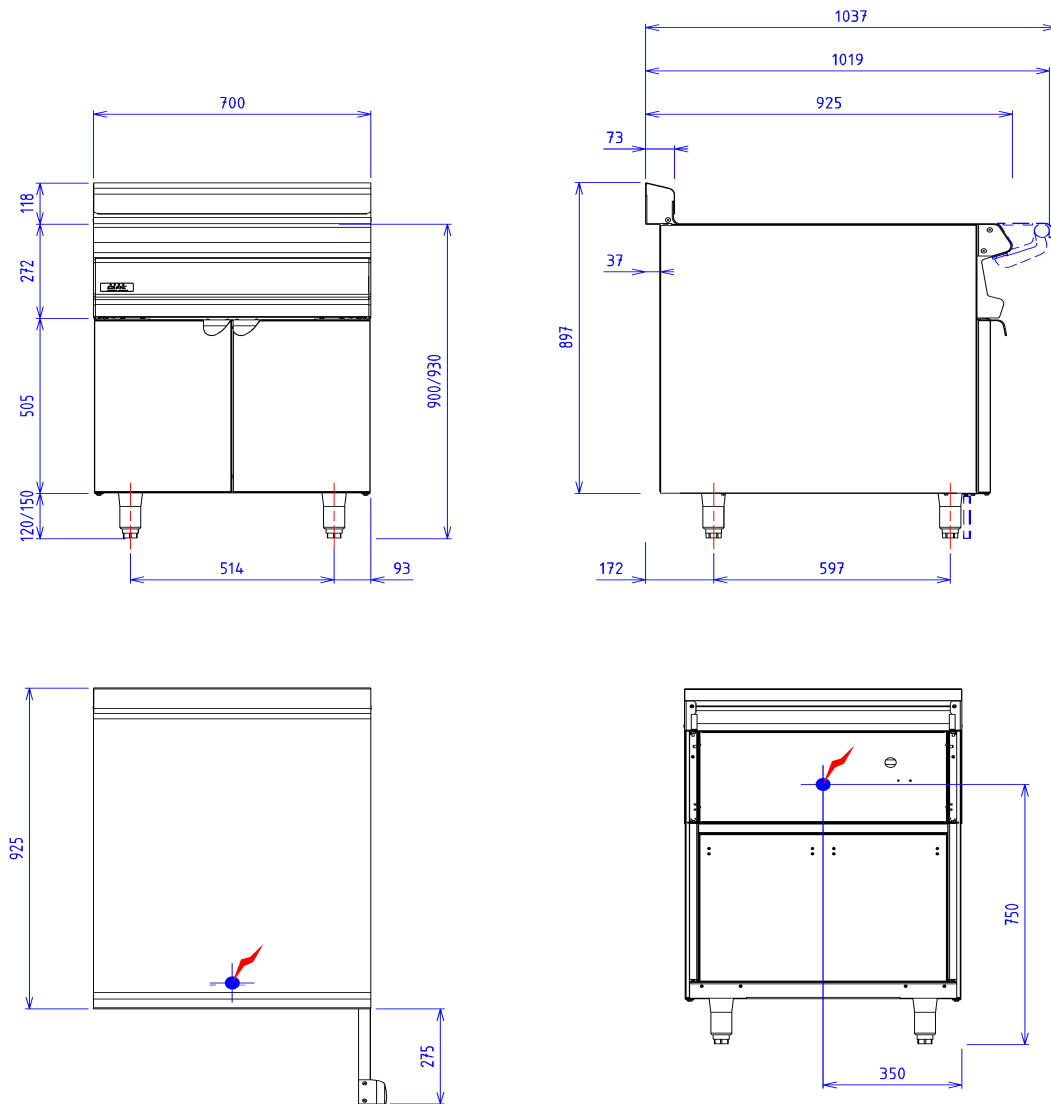
External dimensions : 700 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 700x724x650
 Interior dimensions : 630x656x430
 Front without any visible screw
 Double skin door

Options :

worktop cut out with removable salting tank (X080602)
 s/s steel trim bardiam 38 - linear meter (X081001)
 table for trim bar - 500mm (X081002)
 lateral swing doorfor technical cupboard (X081111)
 neutral unit cut outin technical cupboard (X081112)
 connecting plate for foot removal (X087004)
 electric outlet on front panel (X330311)
 goose neck watertaprotating (X902001)
 cold&hot water supply on water column 500mm (X902002)

**ELECTRIC**

Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335