



Characteristics

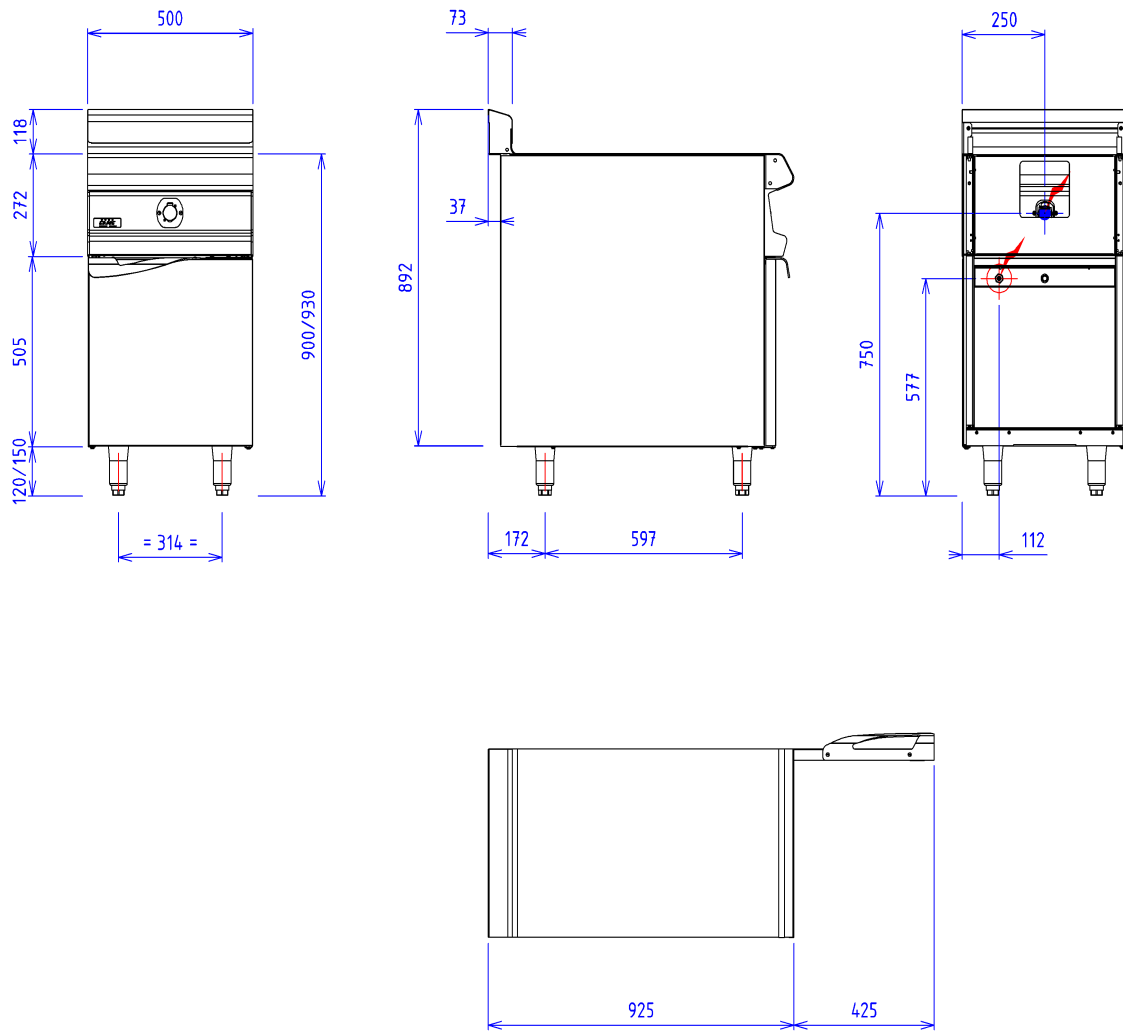
External dimensions : 500 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 500x724x650
 Interior dimensions : 430x656x310
 intermediate shelf
 Front without any visible screw
 Double skin door
 Power 850 W
 Regulation by thermostat 0-85°C

Options :

worktop cut out with removable salting tank (X080602)
 s/s steel trim bardiam 38 - linear meter (X081001)
 table for trim bar - 500mm (X081002)
 lateral swing doorfor technical cupboard (X081111)
 neutral unit cut outin technical cupboard (X081112)
 sliding drawer for gn1/1frame depth 100 (X081113)
 connecting plate for foot removal (X087004)
 electric outlet on front panel (X330311)
 goose neck watertaprotating (X902001)
 cold&hot water supply on water column 500mm (X902002)

**ELECTRIC**

Electric power : 0.85kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335