



Characteristics


External dimensions : 800 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Interior dimensions : 600x656x380
 intermediate shelf
 Front without any visible screw
 Double skin doors
 Power 1,5 kW
 Regulation by thermostat 0-85°C

Options :

worktop cut out with removable salting tank (X080602)
 s/s steel trim bardiam 38 - linear meter (X081001)
 table for trim bar - 500mm (X081002)
 table for trim bar - 800mm (X081003)
 lateral swing door for technical cupboard (X081111)
 neutral unit cut out in technical cupboard (X081112)
 sliding drawer for gn1/1 frame depth 100 (X081113)
 connecting plate for foot removal (X087004)
 electric outlet on front panel (X330311)
 stand for salamander on neutral unit from 800 plus (X901941)
 goose neck water tap rotating (X902001)
 cold & hot water supply on water column 500mm (X902002)

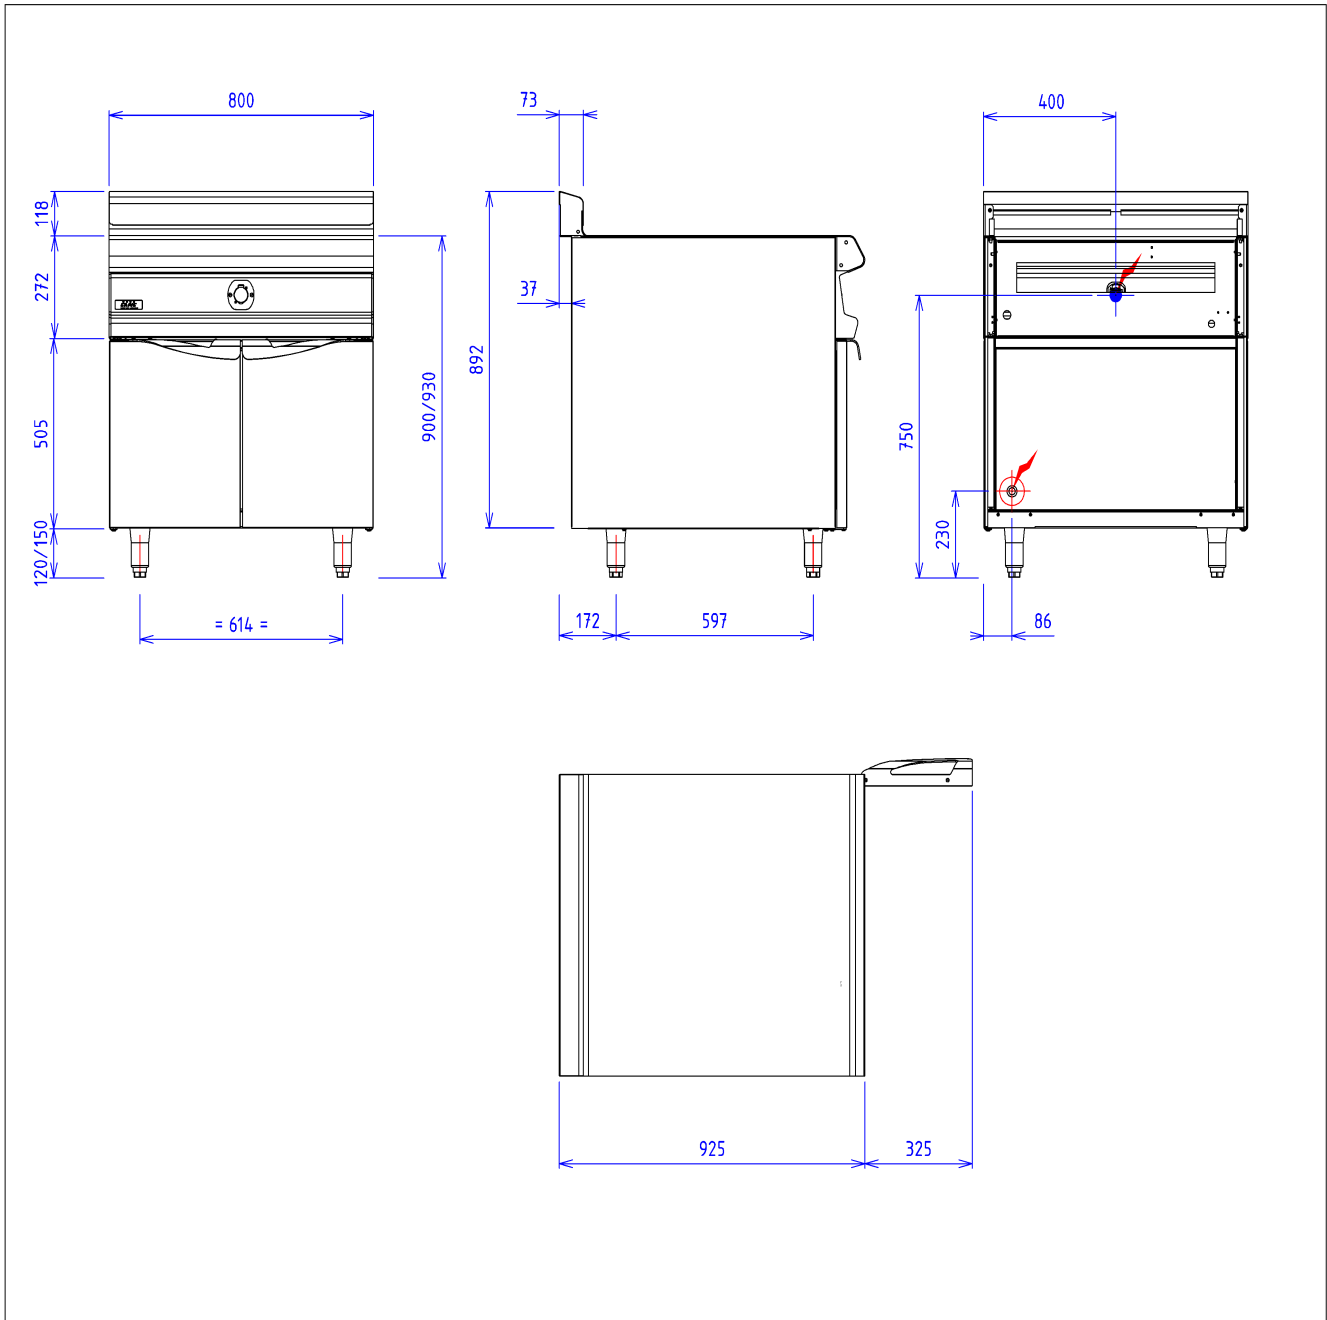

ELECTRIC



Electric power : 1.50kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

230V SINGLE(Si option électrique sélectionnée)
Electrical devices standard to the norm EN 60-335