



Characteristics


External dimensions : 800 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 5.1kW thermostat 50 à 300°C
 Commutateur et Lighting indicator
 Reinforced stainless steel resistances located
 all around top and bottom
 heating together or separately
 Removable steel bottom 6 mm thickness
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1

Options :

worktop cut out with removable salting tank (X080602)
 s/s steel trim bardiam 38 - linear meter (X081001)
 table for trim bar - 500mm (X081002)
 table for trim bar - 800mm (X081003)
 lateral swing doorfor technical cupboard (X081111)
 neutral unit cut outin technical cupboard (X081112)
 sliding drawer for gn1/1frame depth 100 (X081113)
 connecting plate for foot removal (X087004)
 electric outlet on front panel (X330311)
 stand for salamander on neutral unit from 800 plus (X901941)
 goose neck watertaprotating (X902001)
 cold&hot water supply on water column 500mm (X902002)

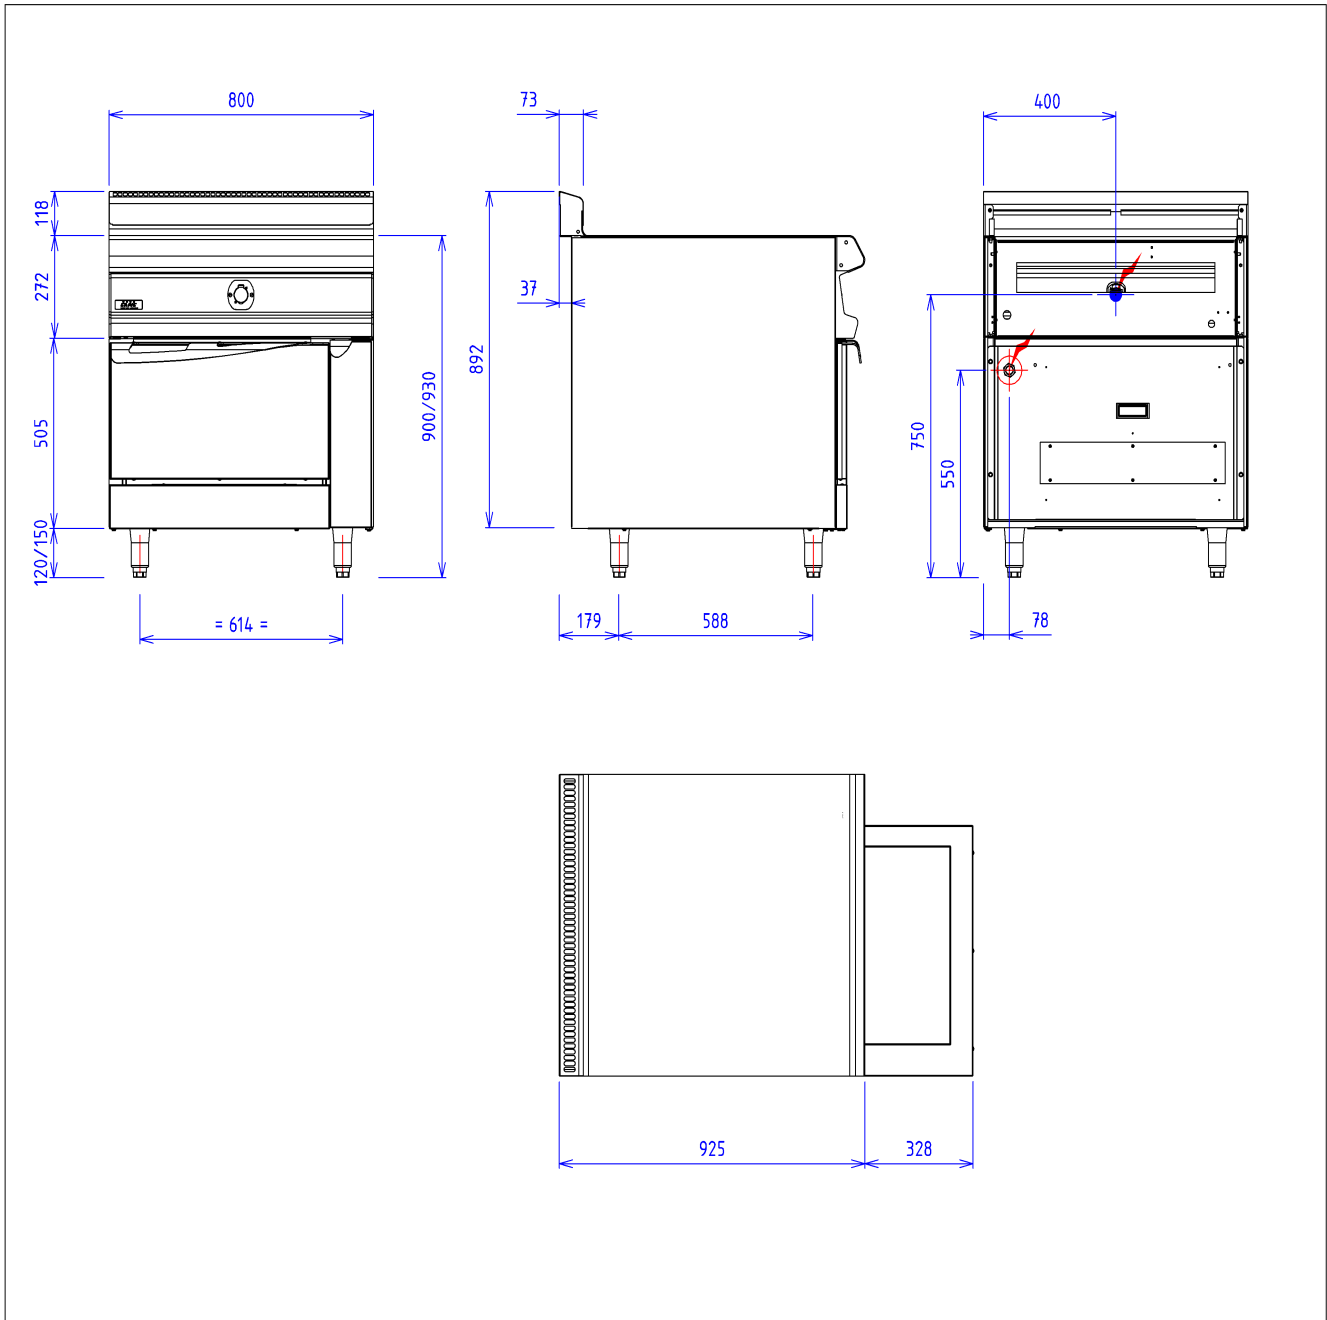

ELECTRIC



Electric power : 5.10kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases

230V SINGLE(Si option électrique sélectionnée)
Electrical devices standard to the norm EN 60-335