



Characteristics

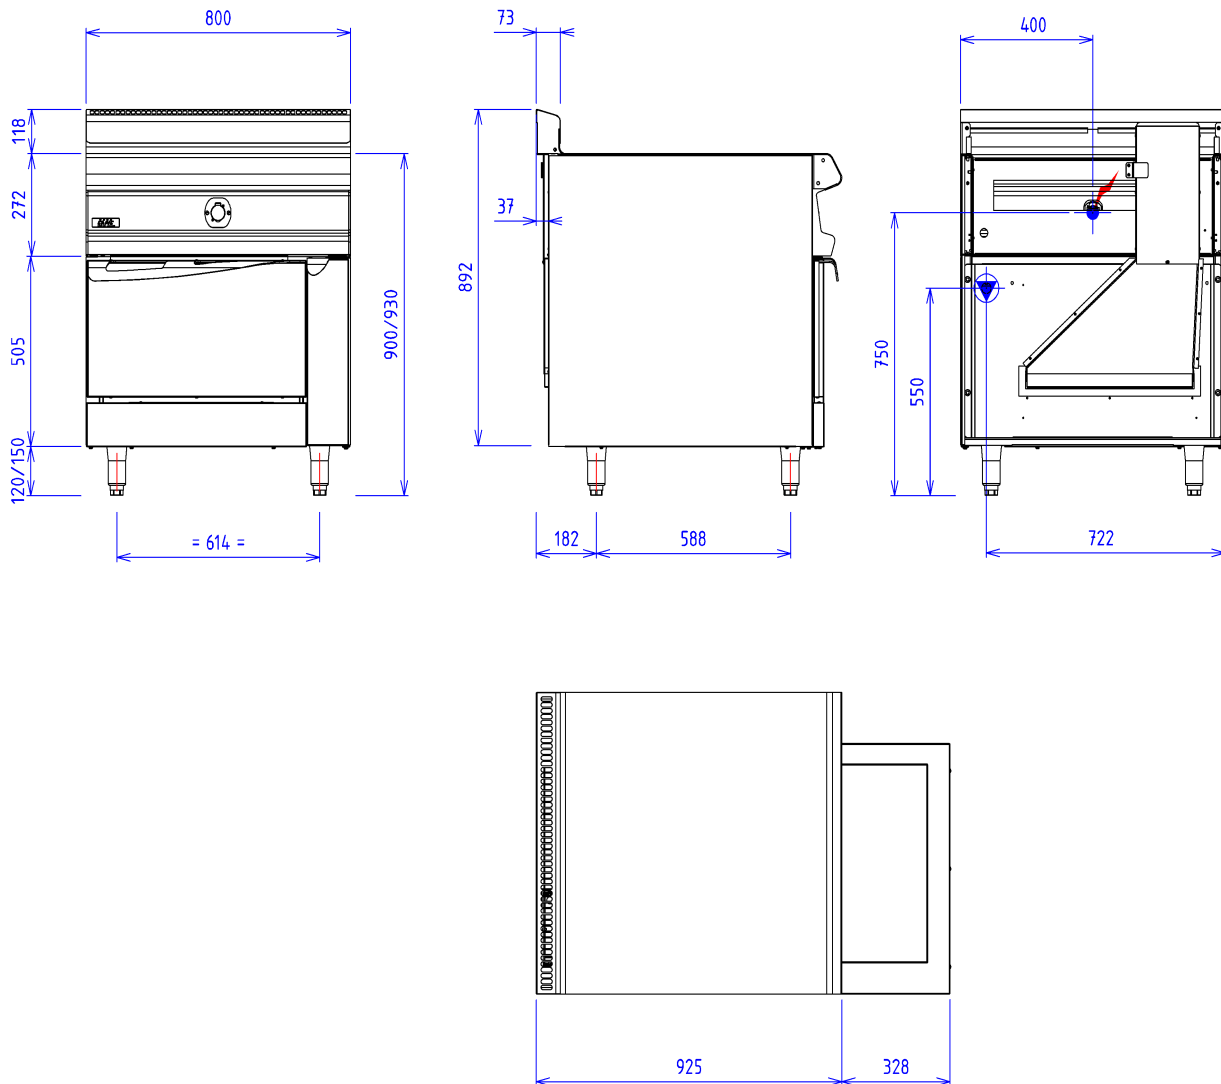
External dimensions : 800 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 10 kW thermostat 50 à 300°C
 Removable steel bottom 6 mm thickness
 Security pilot and thermocouple
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1

Options :

worktop cut out with removable salting tank (X080602)
 s/s steel trim bardiam 38 - linear meter (X081001)
 table for trim bar - 500mm (X081002)
 table for trim bar - 800mm (X081003)
 lateral swing door for technical cupboard (X081111)
 neutral unit cut out in technical cupboard (X081112)
 sliding drawer for gn1/1 frame depth 100 (X081113)
 connecting plate for foot removal (X087004)
 electric outlet on front panel (X330311)
 gaz connection kit for hose per device (X901405)
 electric ignition gas burner (first gas burner) (X901501)
 stand for salamander on neutral unit from 800 plus (X901941)
 goose neck water tap rotating (X902001)
 cold & hot water supply on water column 500mm (X902002)

**GAS**

Gas power : 10kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC

Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335