



### Characteristics

External dimensions :800 X 925 X 270

Stainless steel top 18.10 planetary planetary brushed finish

Top thickness : 3 mm

body 1 mm in planetary brushed stainless steel

Structure : 2 mm in stainless steel

folded front edge radius 20 mm

Back edge forming a chimney cover

Front without any visible screw

### Top

Glass ceramic plate 6 mm thick. Dim: 650x325

Power: 4x3.5kW

On / off switch control

Regulation obtained by a calibrated potentiometer

Pan detection

safety thermostat

LED heat indicator

### Options :

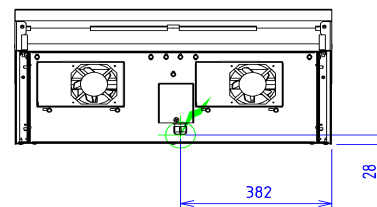
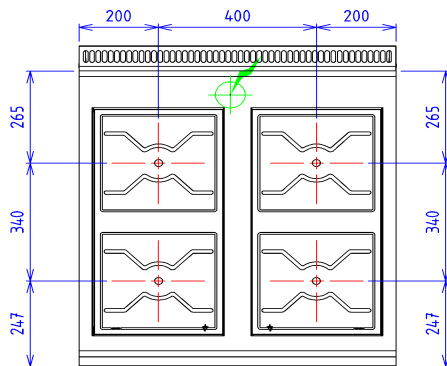
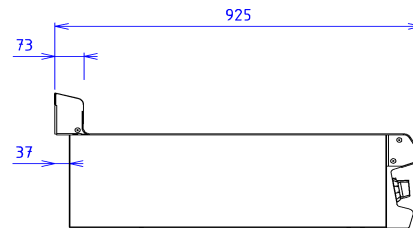
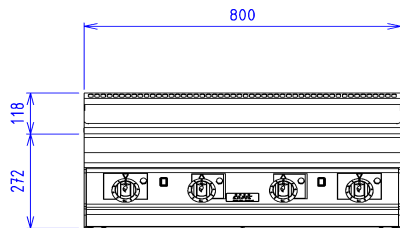
remote generateur for 4hobs 5 kw (X901704)

aeration position if under equipement hot or cold for front 800 (X901706)

aeration position if under equipement hot or cold for front 1200 (X901707)

aeration position if under equipement hot or cold for front 1600 (X901708)

aeration position if under equipement hot or cold for front 2000 (X901709)

**ELECTRIC**

Electric power : 14.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting  
: 400V THREE phases

Electrical devices standard to the norm EN 60-335