

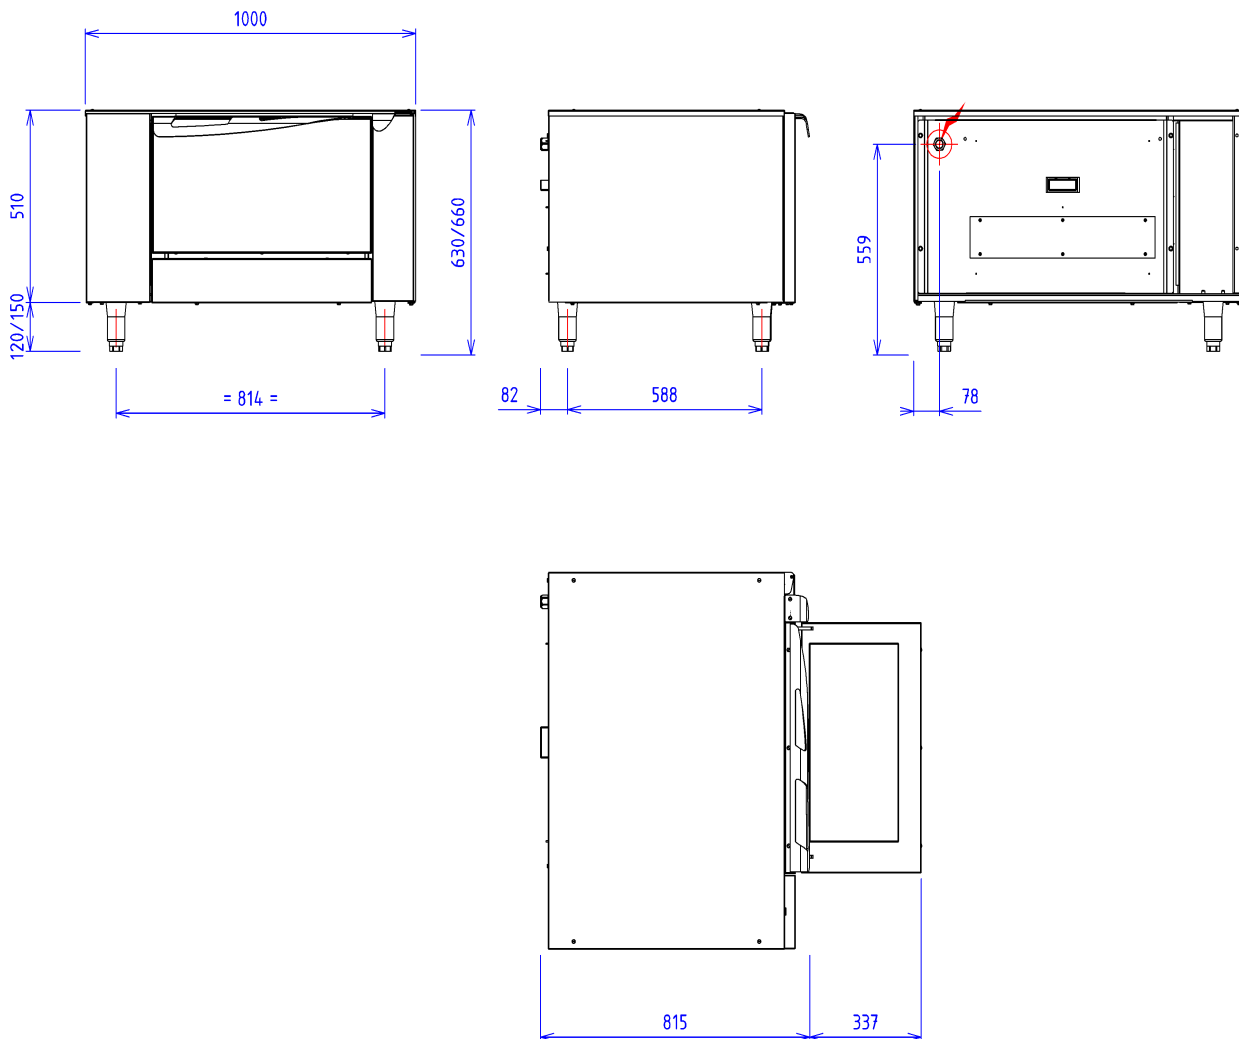


### **Characteristics**

External dimensions : 1000 X 925 X 630  
 Stainless steel top 18.10 planetary planetary brushed finish  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 Front without any visible screw

### **Base unit**

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 1000x724x650  
 Front without any visible screw  
 Dimension of the retort : 650x530x280  
 Walls insulated by mineral fibers  
 aluminium steam barrier  
 Power 5.1kW thermostat 50 à 300°C  
 Commutateur et Lighting indicator  
 Reinforced stainless steel resistances located  
 all around top and bottom  
 heating together or separatly  
 Removable steel bottom 6 mm thickness  
 stainless steel lateral walls  
 Door to double wall insulated and balanced  
 Provided with one stainless steel griddle GN2/1

**ELECTRIC**

Electric power : 5.10kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting  
: 400V THREE phases

Electrical devices standard to the norm EN 60-335