

## DIRECT HEATING - HOT AND COLD RUNNING WATER

**Characteristics**


External dimensions : 800 X 925 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

**Top**

1 mm stainless steel double lid  
 equipment with echtermann hinge  
 Cuve in stainless steel 18.10 welded on the top  
 2mm thickness for the ferrule and 8mm for the bottom  
 Dimensions (ØxP) : 603x550  
 net capacity : 150 l.  
 Power: 12 kW  
 Lid handle with insulated end  
 HW/CW supply by fixed tap  
 controlled on the front by 1/4 turn tap  
 with ceramic components  
 Drain Valve 40/49 with retractable handle  
 Removable strainer with level indication  
 Heating by reinforced stainless steel resistances  
 Leaned against the bottom of the tank  
 Sequential energy dispenser controller  
 Lighting indicator

**Options :**

removable perforated lining for 235 l kettle for boiling kettle 100/150 (X294001)  
 offset drain pipe for boiling kettle (X901802)  
 sequential thermostatic regulation mode boiling kettle and command in offset control box (X294013)

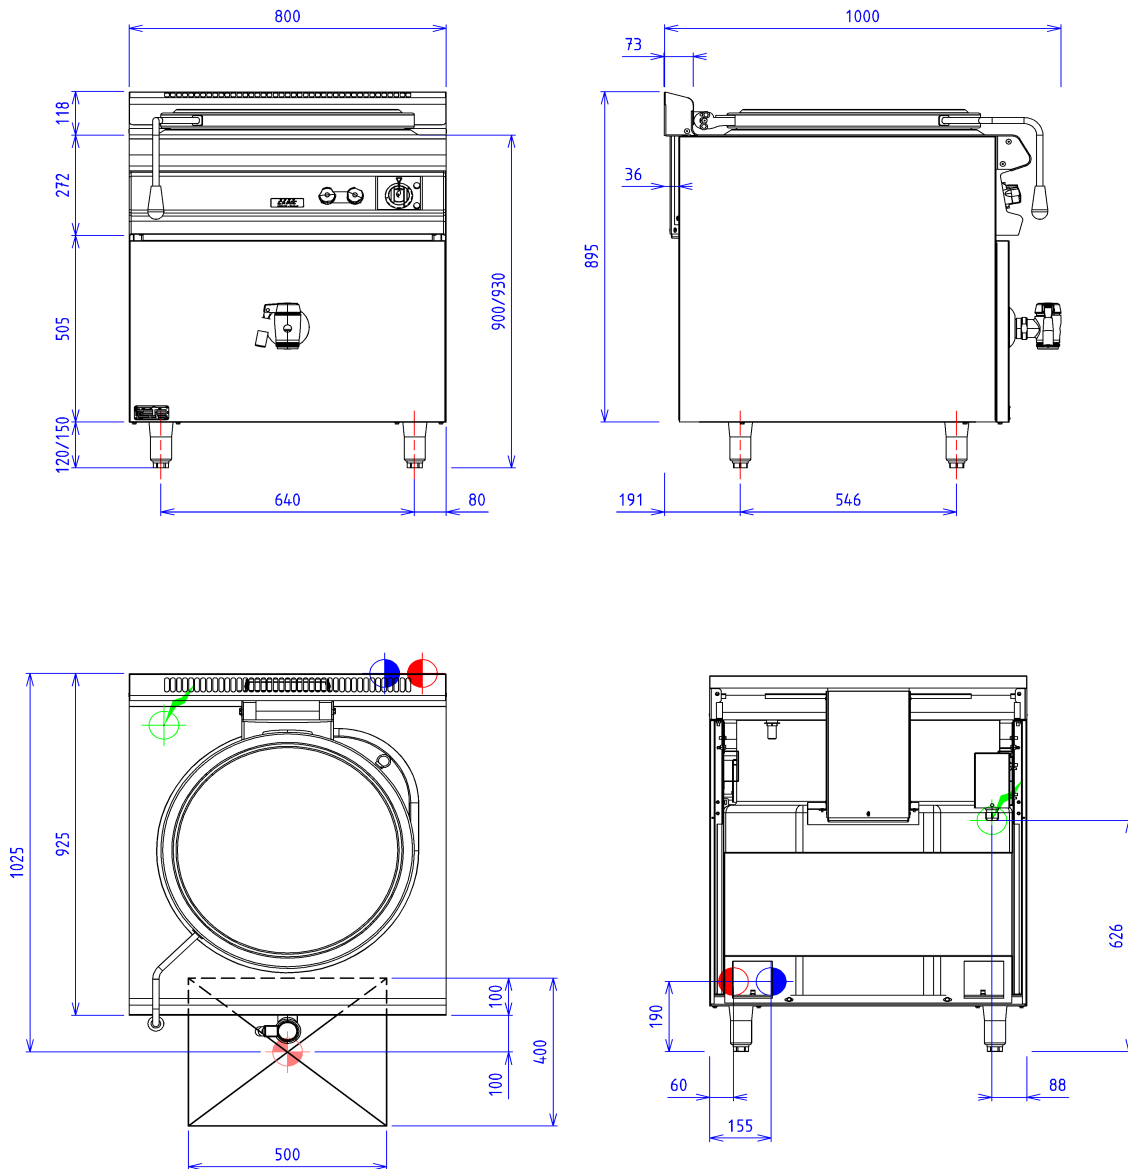

## ELECTRIC



Electric power : 12.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting  
: 400V THREE phases

Electrical devices standard to the norm EN 60-335

## WATER/AIR



Hot water fitting :15/21 FLEXIBLE

Cold water fitting :15/21 FLEXIBLE