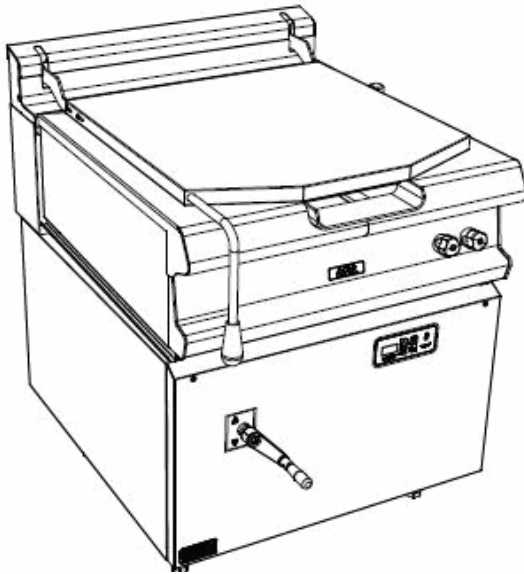


MANUAL TILTING - HOT AND COLD RUNNING WATER

**Characteristics**


External dimensions : 800 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover

Top

Thermostatic regulation at the bottom of the tank
 1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank in stainless steel 18.10 thickness 2 mm
 Bimetal bottom - 12 mm thickness
 Wide radius angles
 Wide spout
 Dimensions : 650x575x250
 Net capacity : 80 l.
 Power : 9 kW
 Control by energy regulator
 Heating by stainless steel armored high performance
 heating elements.
 Hot/Cold water supply
 controlled from front by 1/4 turn tap
 with ceramic components
 Manual titling with hand crank

Options :

spout strainer for 35for model 35 (X295004)
 removable offset spoutup to 350mm (X295014)
 sequential thermostatic regulation kettle mode in addition with bratt pan mode (X295016)

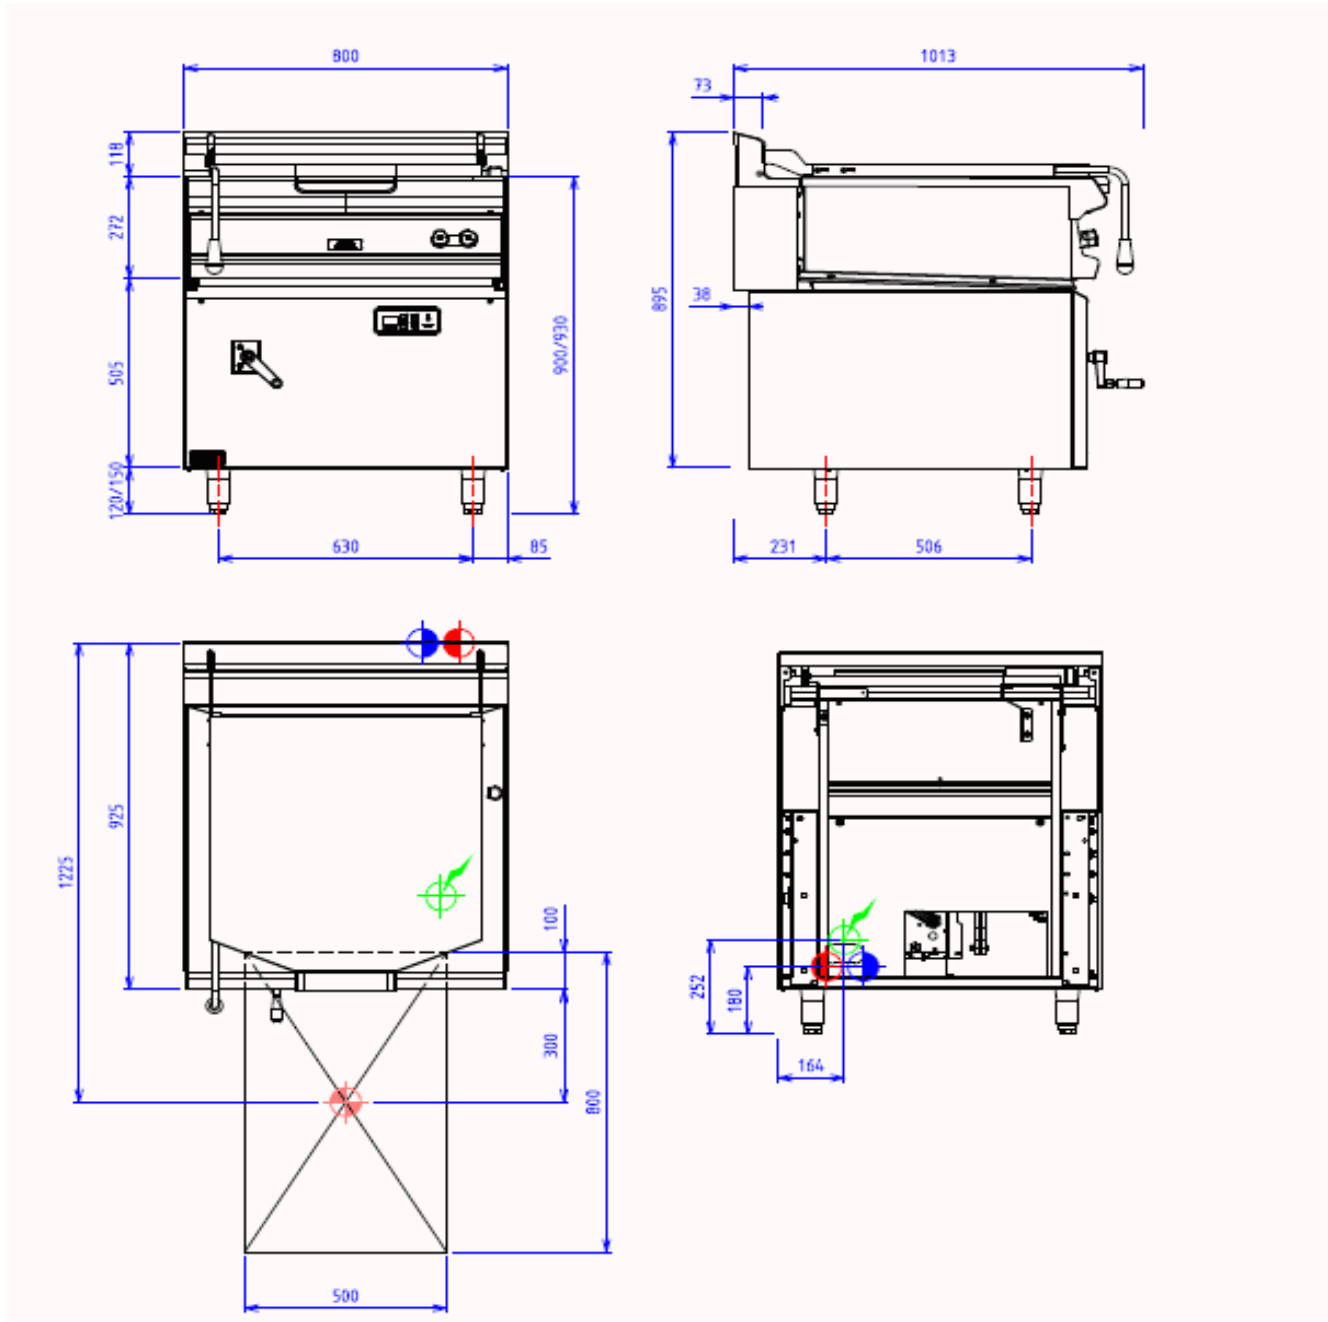**ELECTRIC**

Electric power : 9.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335

WATER/AIR

Hot water fitting :15/21 FLEXIBLE

Cold water fitting :15/21 FLEXIBLE