

MANUAL TILTING - HOT AND COLD RUNNING WATER

**Characteristics**

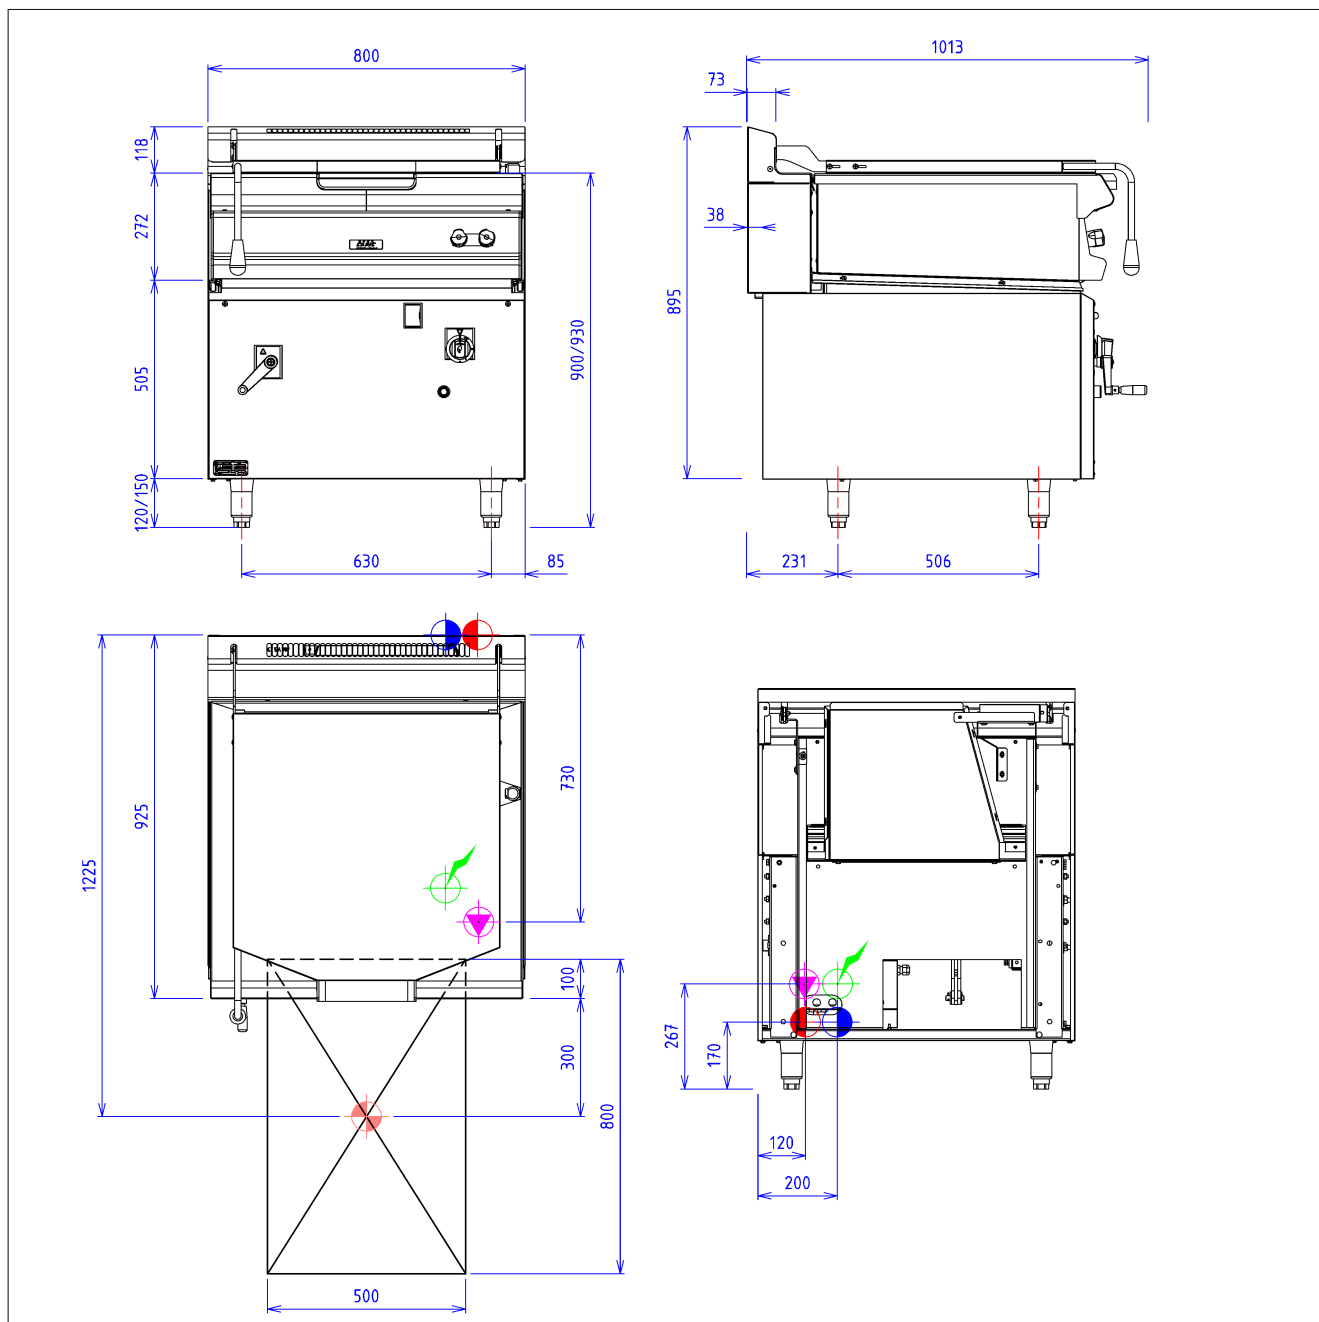
External dimensions : 800 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover

Top

1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank in stainless steel 18.10 thickness 2 mm
 Bimetal bottom - 12 mm thickness
 Wide radius angles
 Wide spout
 Dimensions : 650x575x250
 Net capacity : 80 l.
 Power : 12,5 kW
 Heating by gas ramps
 Control be 4-position tap
 Security pilot and thermocouple
 Hot/Cold water supply
 controlled from front by 1/4 turn tap
 with ceramic components
 Manual titling with hand crank
 Electric ignition

Options :

spout strainer for 35for model 35 (X295004)
 removable offset spoutup to 350mm (X295014)
 offset drain system for more then 350 mm (X295015)
 sequential thermostatic regulation bratt pan mode (X295017)
 sequential thermostatic regulation bratt pan and boiling kettle mode (X295018)

**GAS**

Gas power : 13kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC

Electric power : 0.10kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335

WATER/AIR

Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE