

ELEC TILTING-HOT & COLD WATER

**Characteristics**

External dimensions : 1200 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 Equipment can be cantilevered on a suspension kit (optional)
 folded front edge radius 20 mm
 Back edge forming a chimney cover

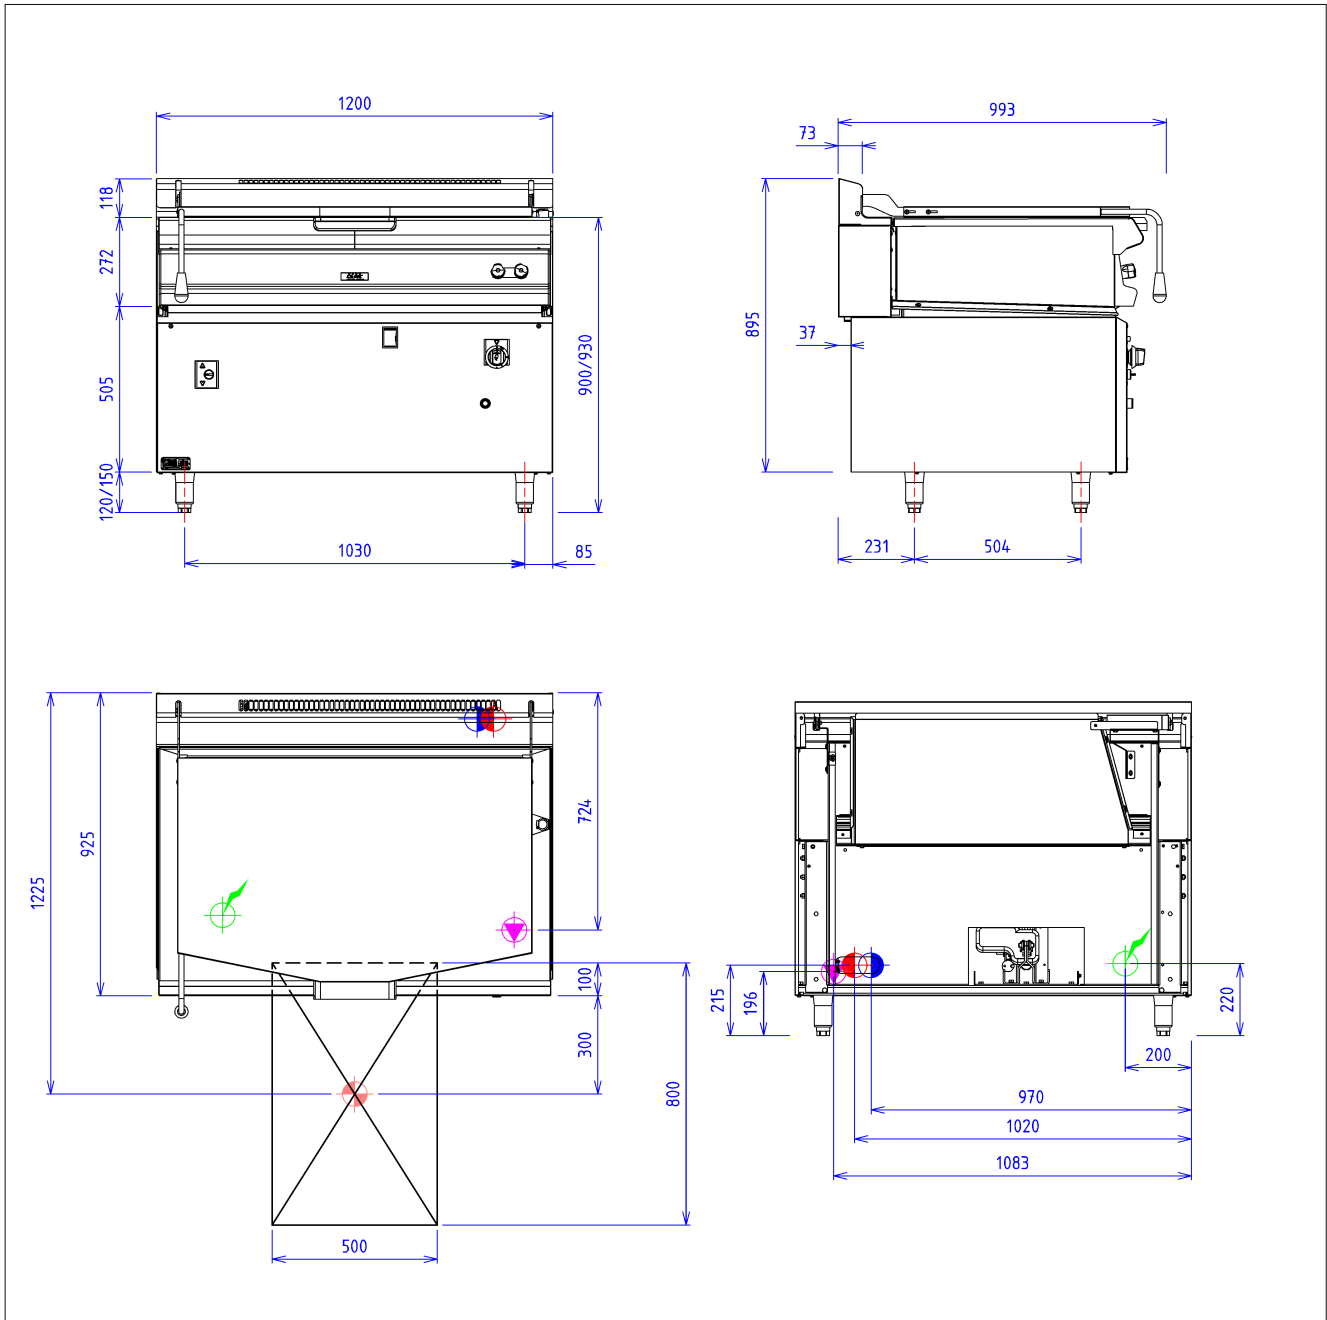
Top

1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank in stainless steel 18.10 thickness 2 mm
 Bimetal bottom - 12 mm thickness
 Wide radius angles
 Wide spout
 Dimensions : 1050x575x250
 Net capacity : 130 l.
 Power : 24,5 kW
 Heating by gas ramps
 Control be 4-position tap
 Security pilot and thermocouple
 Hot/Cold water supply
 controlled from front by 1/4 turn tap
 with ceramic components
 Tilting by electric actuator
 Electric ignition

Options :

removable frame bratt pan 60 (X295002)
 spout strainer for 60for model 60 (X295005)
 removable offset spoutup to 350mm (X295014)
 digital electrical controls tilting bratt pan (X901033)
 offset drain system for more then 350 mm (X295015)
 sequential thermostatic regulation bratt pan mode (X295017)
 sequential thermostatic regulation bratt pan and boiling kettle mode (X295018)

Bratt pan

**GAS**

Gas power : 25kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC

Electric power : 0.50kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335

WATER/AIR

Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE