

ELEC TILTING - HOT AND COLD RUNNING WATER

**Characteristics**

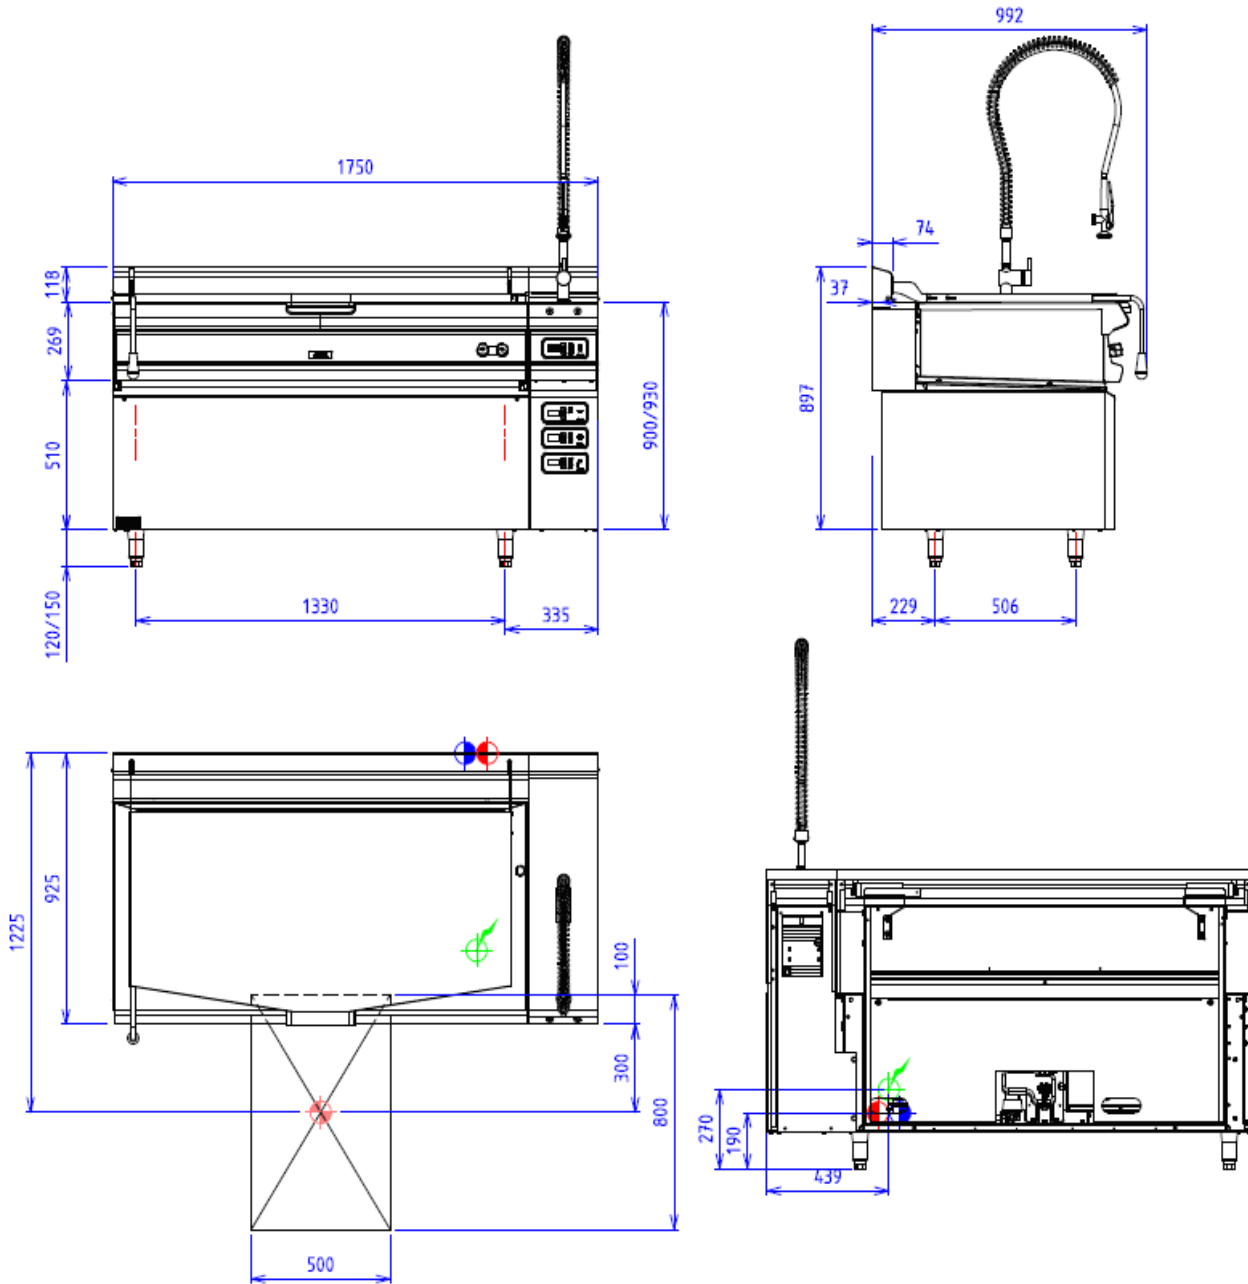
External dimensions : 1750 X 925 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover

Top

1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank in stainless steel 18.10 thickness 2 mm
 Bimetal bottom - 12 mm thickness
 Wide radius angles
 Wide spout
 Dimensions : 1350x575x250
 Net capacity : 170 l.
 Power : 27 kW
 Heating by stainless steel armored high performance
 heating elements.
 Hot/Cold water supply
 controlled from front by 1/4 turn tap
 with ceramic components
 Tilting by electric actuator
 Heating stop while tilting
 Multisensor digital thermostatic regulation
 Digital volumetric water meter
 Digital timer end of cooking + delayed start
 Built-in shower for water supply WW / CW
 Kettle safety at 400 ° C

Options :

removable frame bratt pan 80 (X295003)
 spout strainer for 80for model 80 (X295007)
 removable offset spout up to 350mm (X295014)
 offset drain system for more then 350 mm (X295015)
 core probe with regulation and haccp connection (X295019)

**ELECTRIC**

Electric power : 27.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335

WATER/AIR

Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE