



### Characteristics

External dimensions : 400 X 925 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top


2 open burners  
 removable burners with pilot light 2x7kw  
 BURNERS WITH STAINLESS STEEL HOUSING  
 Burner griddles in stainless steel, dimensions : 400x600  
 Stamped tank & cleaning tray  
 Security by thermocouple with pilotlight  
 secured and protected commands

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 400x724x650  
 Interior dimensions : 330x656x310  
 intermediate shelf  
 Front without any visible screw  
 Double skin door  
 Power 850 W  
 Regulation by thermostat 0-85°C

### Options :

s/s steel trim bardiam 38 - linear meter (X081001)  
 gaz connection kitfor hose per device (X901405)  
 electric ignition gas burnereach other gas burner (X901502)  
 ecoflam system for 2 burners 7kw (X901506)

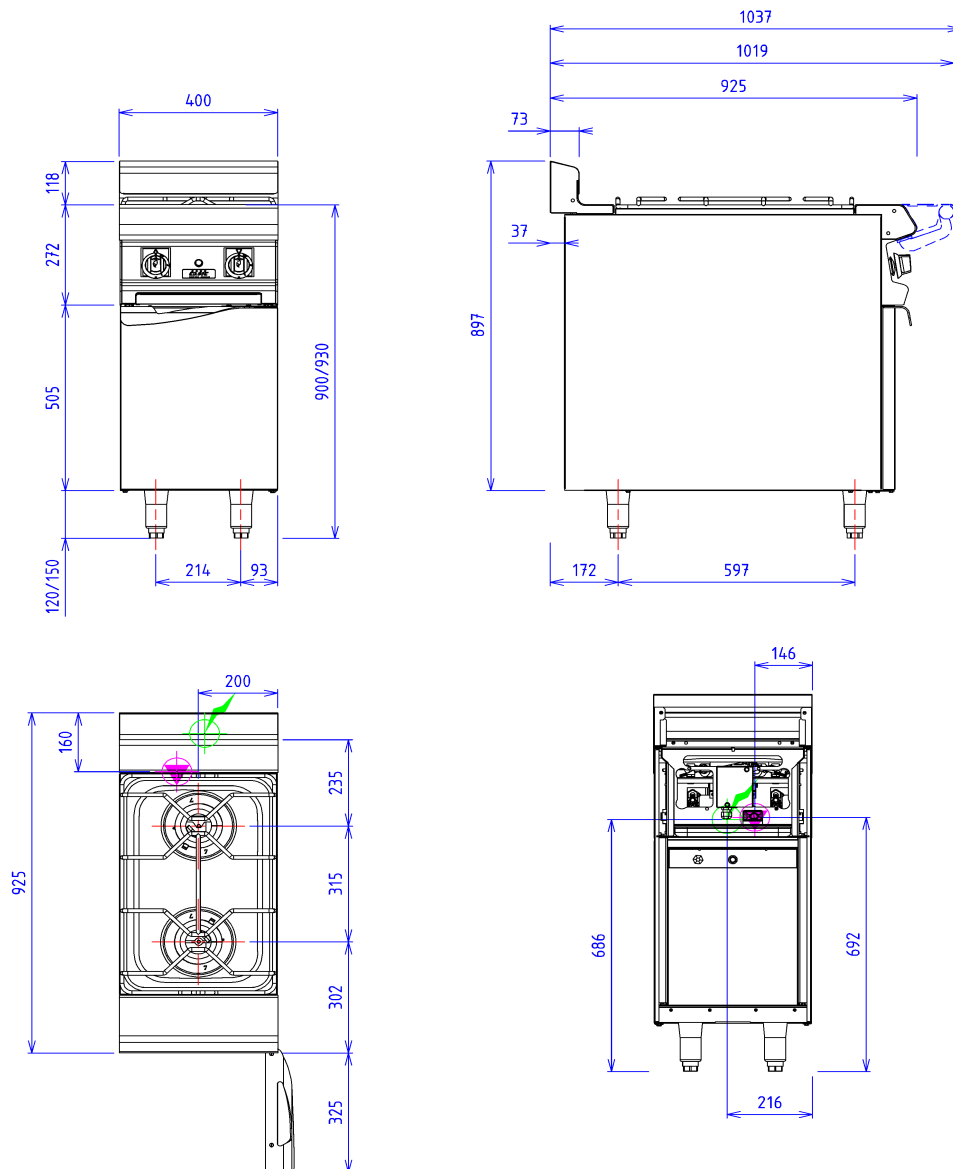

## GAS



Gas power : 14kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

## ELECTRIC



Electric power : 0.85kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

230V SINGLE( Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335