

### Characteristics

External dimensions :400 X 725 X 250

Construction in planetary brushed stainless steel 18.10

Top thickness : 2 mm

Front : 1 mm planetary brushed finish

Structure : 1 mm in stainless steel

Back edge forming a chimney cover

Front without any visible screw

### Top

Solid top made of steel, dimensions : 400x550

Fireplace with brick refractory

Heating by circular burner


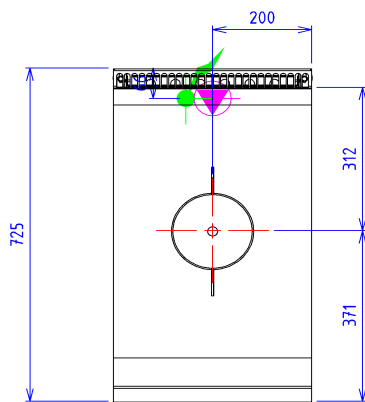
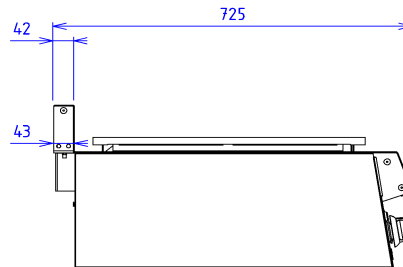

Power 6.0 kW

regulated flow by a 3-positions tap

Security pilot and thermocouple

### Options :

electric ignition gas burner(first gas burner) (X901501)

**GAS**

Gas power : 6kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

**ELECTRIC**

Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE( Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335