



Characteristics

External dimensions :400 X 725 X 250

Construction in planetary brushed stainless steel 18.10

Top thickness : 2 mm

Front : 1 mm planetary brushed finish

Structure : 1 mm in stainless steel

Back edge forming a chimney cover

Front without any visible screw

Top

on/off switch

1 thermostatic heating zone





Indicator light

smooth cast iron plate : 400x550

Power : 5 kW

removable Splash gard

Drawer to collect greases

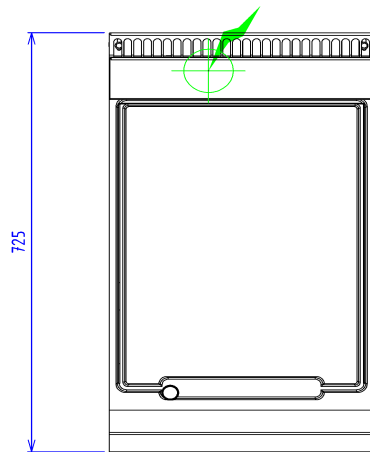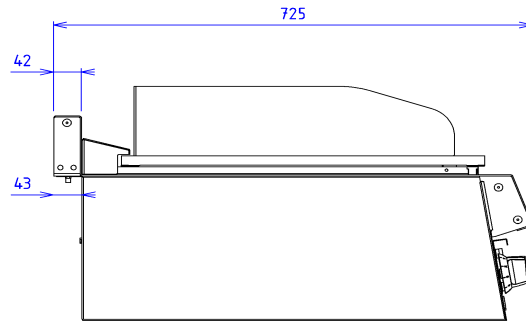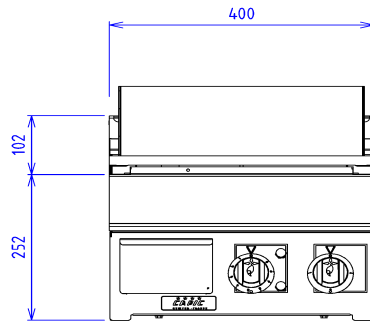

ELECTRIC



Electric power : 5.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE phases

Electrical devices standard to the norm EN 60-335