



Characteristics


External dimensions : 400 X 725 X 250
Construction in planetary brushed stainless steel 18.10
Top thickness : 2 mm
Front : 1 mm planetary brushed finish
Structure : 1 mm in stainless steel
Back edge forming a chimney cover
Front without any visible screw

Top

smooth cast iron plate : 400x550
Power : 7,2 kW
Heating by gas stainless steel ramps with great thickness
regulated flow by a 3-positions tap
Security pilot and thermocouple
removable Splash gard
Drawer to collect greases

Options :

electric ignition gas burner(first gas burner) (X901501)

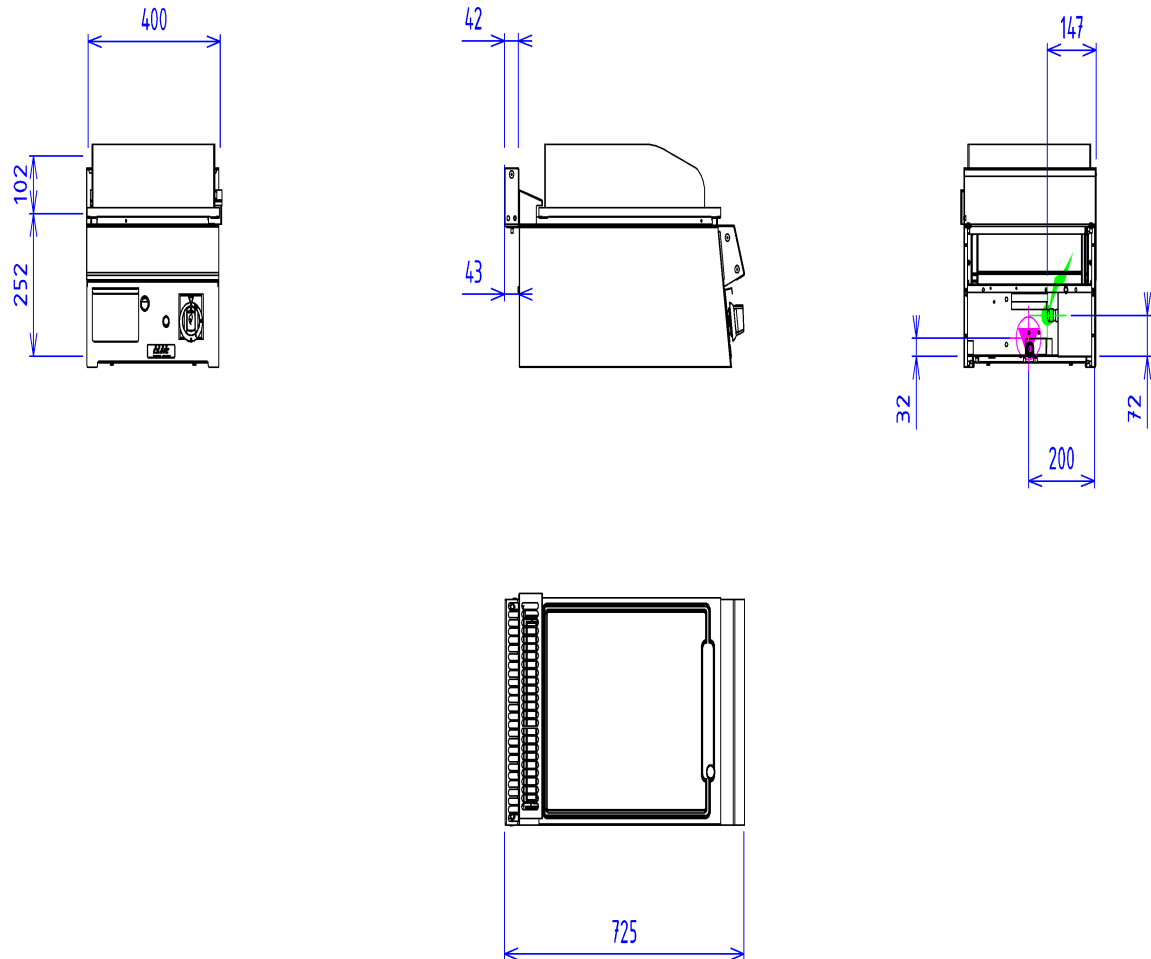

GAS



Gas power : 7kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE(Si option électrique sélectionnée)
Electrical devices standard to the norm EN 60-335