



### Characteristics

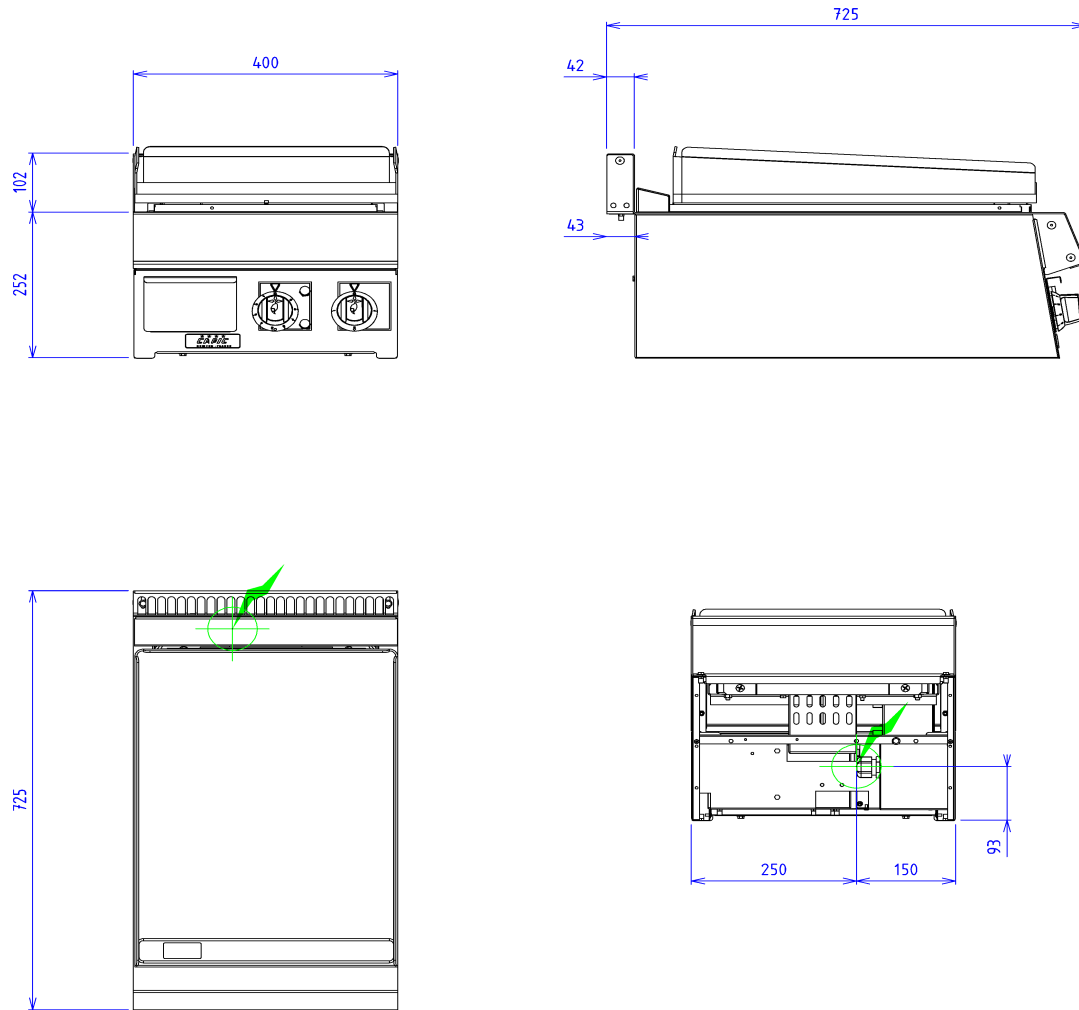
External dimensions : 400 X 725 X 250  
Construction in planetary brushed stainless steel 18.10  
Top thickness : 2 mm  
Front : 1 mm planetary brushed finish  
Structure : 1 mm in stainless steel  
Back edge forming a chimney cover  
Front without any visible screw

### Top

special stainless steel plate 18.10 thickness 15 mm:  
400x550  
Power : 5 kW  
Heating by reinforced stainless steel resistances  
Control by thermostat  
on/off switch  
Welded Splash gard  
Drawer to collect greases

### Options :

1/2 ribbed griddle 400x500 stainless steel 400 or 500 (X050972)  
ribbed griddle for stainless steel plate 400 (X050973)  
mirror polishing chrome aspect (X050974)

**ELECTRIC**

Electric power : 5.00kW

Elec Résevation : INTERNAL TERMINAL BOARD - Elec fitting  
: 400V THREE phases

Electrical devices standard to the norm EN 60-335