

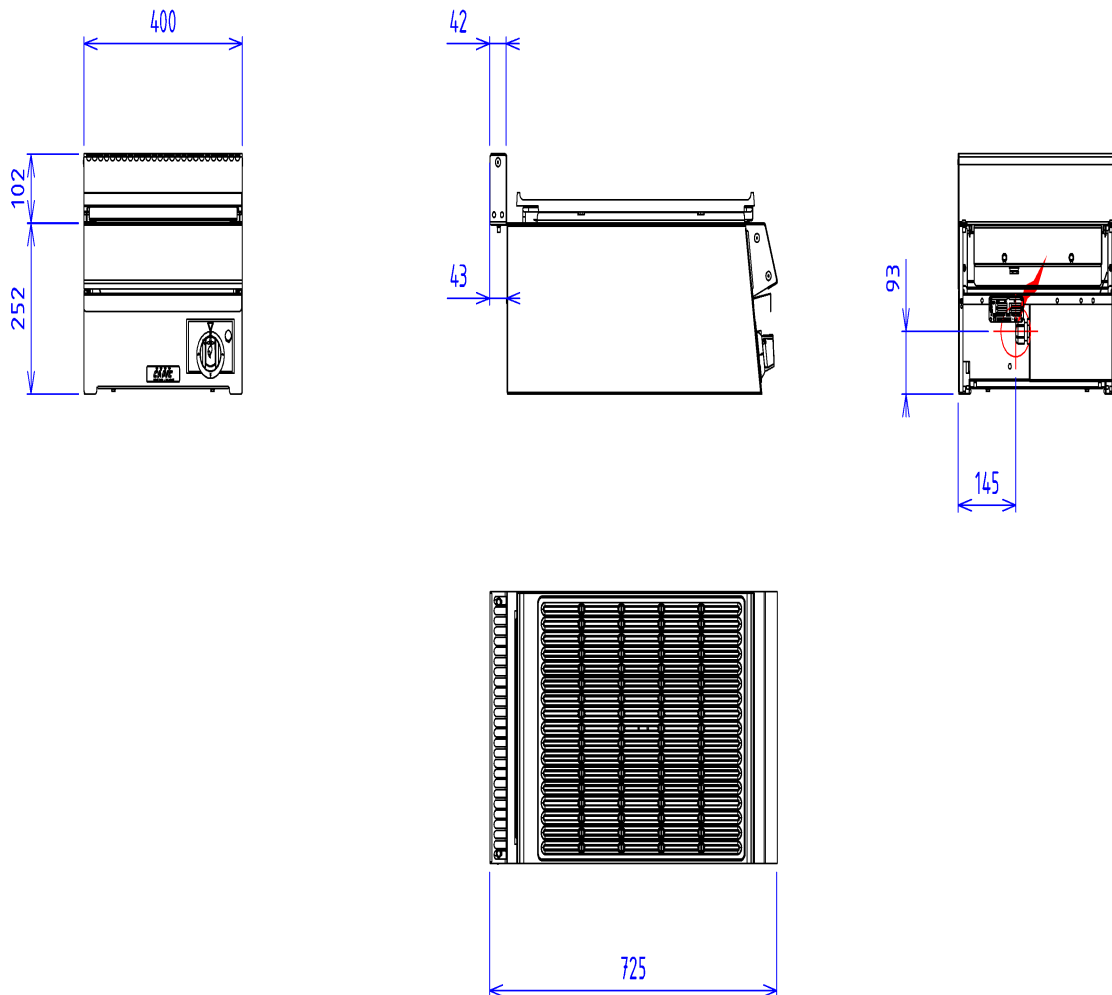


Characteristics

External dimensions : 400 X 725 X 250
Construction in planetary brushed stainless steel 18.10
Top thickness : 2 mm
Front : 1 mm planetary brushed finish
Structure : 1 mm in stainless steel
Back edge forming a chimney cover
Front without any visible screw

Top

cast iron plate : 400x600
Power : 6 kW
Heating by reinforced stainless steel resistances
Control by energy regulator
Drawer to collect greases

**ELECTRIC**

Electric power : 6.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases

Electrical devices standard to the norm EN 60-335