



Characteristics


External dimensions : 400 X 725 X 250
 Construction in planetary brushed stainless steel 18.10
 Top thickness : 2 mm
 Front : 1 mm planetary brushed finish
 Structure : 1 mm in stainless steel
 Back edge forming a chimney cover
 Front without any visible screw

Top

stainless steel tank 316L
 Power : 10 kW
 Efficiency: 30 kg/h of fresh pastas
 Heating by oblong resistances
 Draining by 1/4 turn tap diam 20/27
 Water flow for evacuation
 of starch to the overflow area
 2 1/2 pasta baskets 316L 310x120x185

Options :

pasta portion basket price per unit - 6 max/ tank (X291101)
 large basket for pasta 380x270x180 (X291102)

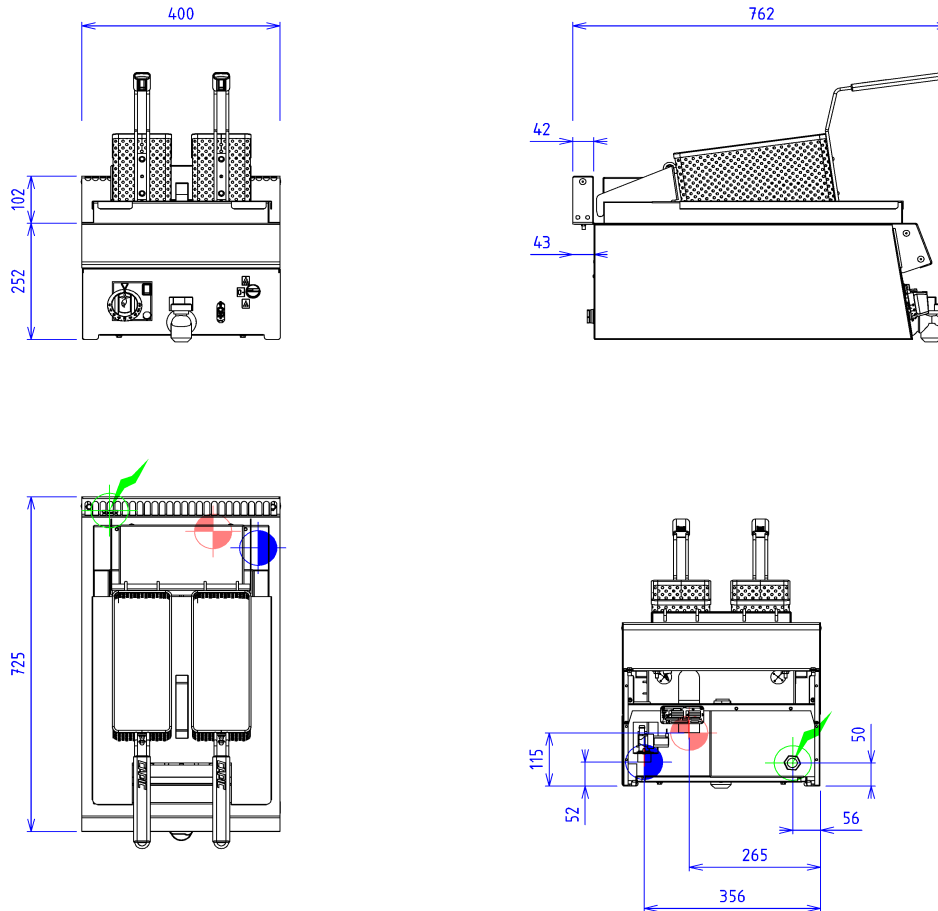

ELECTRIC



Electric power : 10.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335

WATER/AIR



Cold water fitting :15/21 FLEXIBLE



Drain fitting :D 42 male stainless steel