



Characteristics

External dimensions : 1000 X 725 X 900
 Construction in planetary brushed stainless steel 18.10
 Top thickness : 2 mm
 Front : 1 mm planetary brushed finish
 Structure : 1 mm in stainless steel
 Back edge forming a chimney cover
 Front without any visible screw

Top


2 open burners on right
 2 open burners on left
 removable burners with pilot light 4x4,8kw
 Stainless steel burner grill dimensions : 300x550
 Solid top made of steel, dimensions : 400x550
 Fireplace in brick refractory with
 Removable central burner (6KW)
 Security by thermocouple with pilotlight
 secured and protected commands

Base unit

Dimensions of the oven : 530x450x290
 Walls insulated with mineral fibers
 aluminium steam barrier
 Power 4.2kW thermostat 50 à 300°C
 Commutateur et Lighting indicator
 Reinforced stainless steel resistances located
 all around top and bottom
 heating together or separately
 Removable steel bottom 6 mm thickness
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle

Options :

gas connection kit for hose per device (X901405)
 electric ignition gas burner (first gas burner) (X901501)
 electric ignition gas burner each other gas burner (X901502)

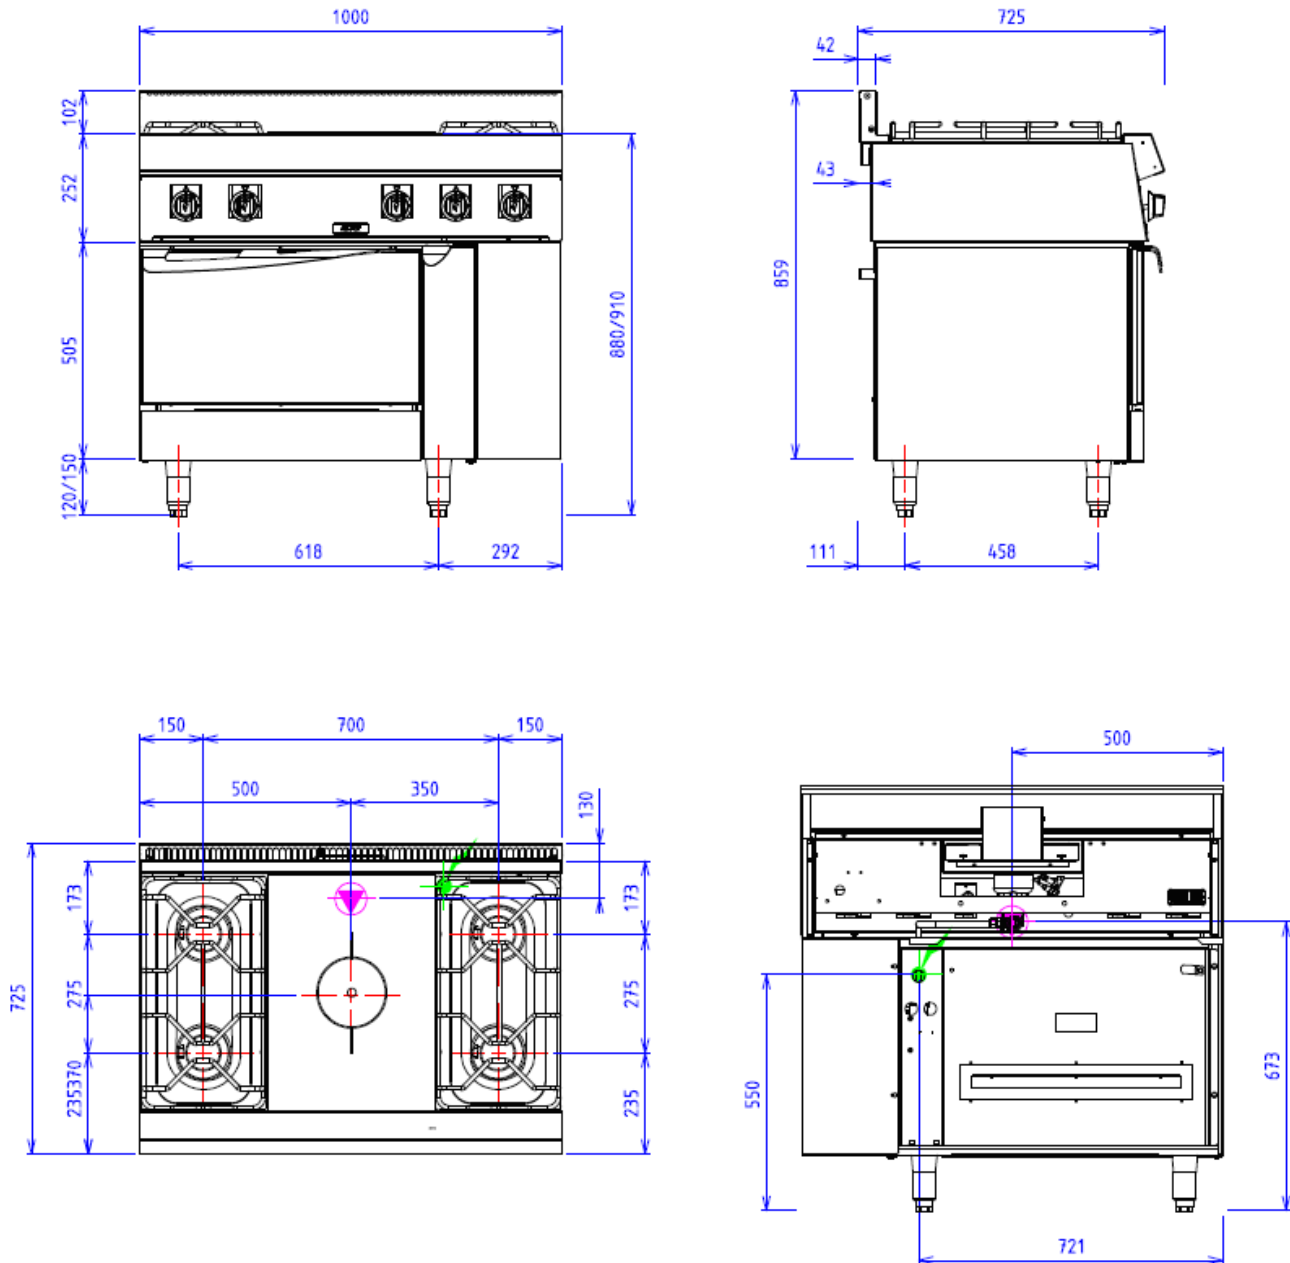

GAS



Gas power : 25kW

Gas connection :

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 4.20kW

Elec Réservation : - Elec fitting : 400V THREE phases

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335