



### Characteristics

External dimensions :800 X 725 X 250

Construction in planetary brushed stainless steel 18.10

Top thickness : 2 mm

Front : 1 mm planetary brushed finish

Structure : 1 mm in stainless steel

Back edge forming a chimney cover

Front without any visible screw

### Top

Stainless steel smooth plate 800x550 - 15mm thickness

Heating by reinforced stainless steel heating elements.

on/off switches

2 heating zones controlled by independent thermostats

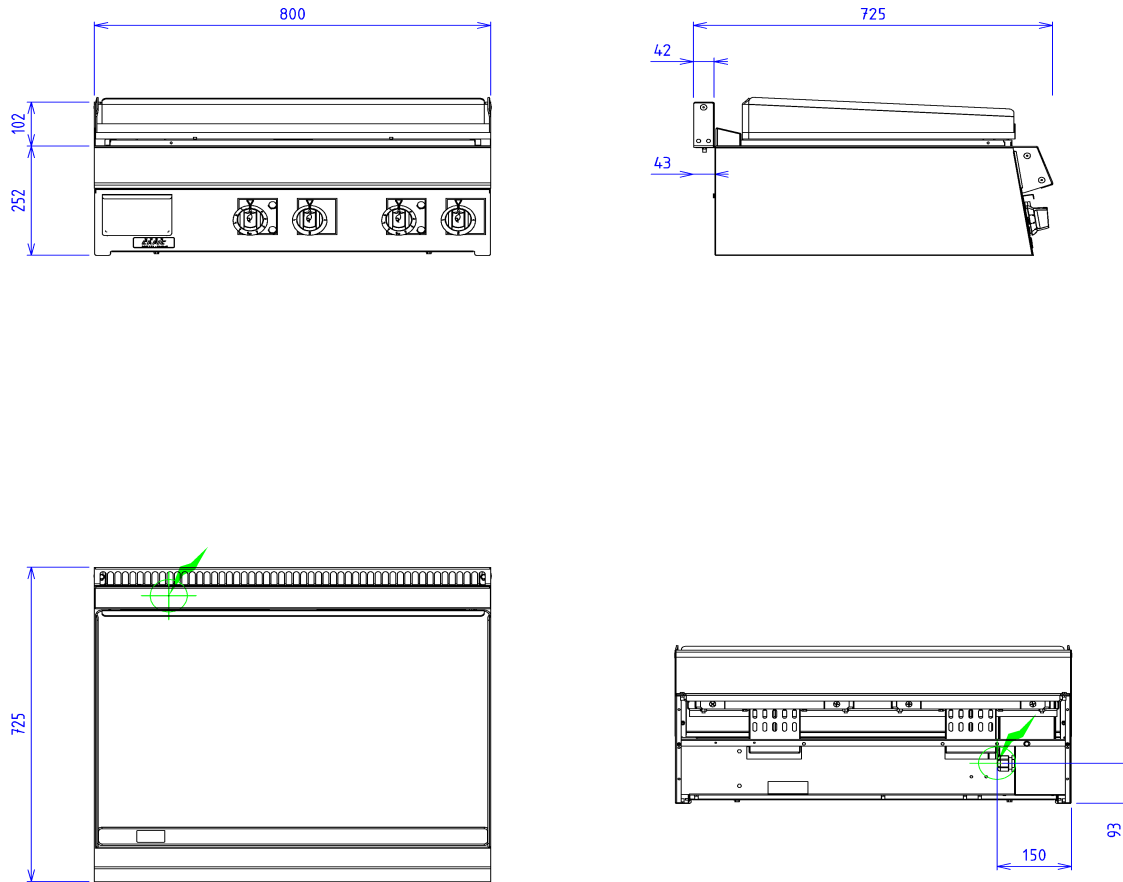
Power : 10 kW

Welded upstand - height: 80mm - thicknes: 3mm

Drawer to collect greases.

Scraper included.

Welded Splash gard

**ELECTRIC**

Electric power : 10.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting  
: 400V THREE phases

Electrical devices standard to the norm EN 60-335