



## AVEN 2017 60L ELEC BOILING KETTLE

### INDIRECT HEAT - HOT & COLD WATER

#### Characteristics

External dimensions : 800 X 725 X 900

Stainless steel top 18.10 planetary planetary brushed finish

Construction in planetary brushed stainless steel 18.10

Top thickness : 2 mm

Front : 1 mm planetary brushed finish

Structure : 1 mm in stainless steel

Back edge forming a chimney cover

Front without any visible screw

Composite FEET of 150 adjustable in height

#### Top

1mm thick. Counterbalanced lid

Tank and double layer in stainless steel 18.10

welded on the top

2mm thickness for the ferrule and 3mm for the bottom

Dimensions (ØxP) : 500x360

net capacity : 60 l.

Power: 9 kW

Lid handle with insulated end

HW/CW supply by fixed tap

controlled on the front by 1/4 turn tap

with ceramic components

Drain Valve 40/49 with retractable handle

Removable strainer with level indication

Immersed heater

into the double skin

Sequential energy dispenser controller

Lighting indicator

Doubleskin with security set


Electronic level controller

#### Options :

removable perforated lining for 235 l kettle for boiling kettle 100/150 (X294001)

offset drain pipe for boiling kettle (X901802)

316l stainless steel kettle (X904001)

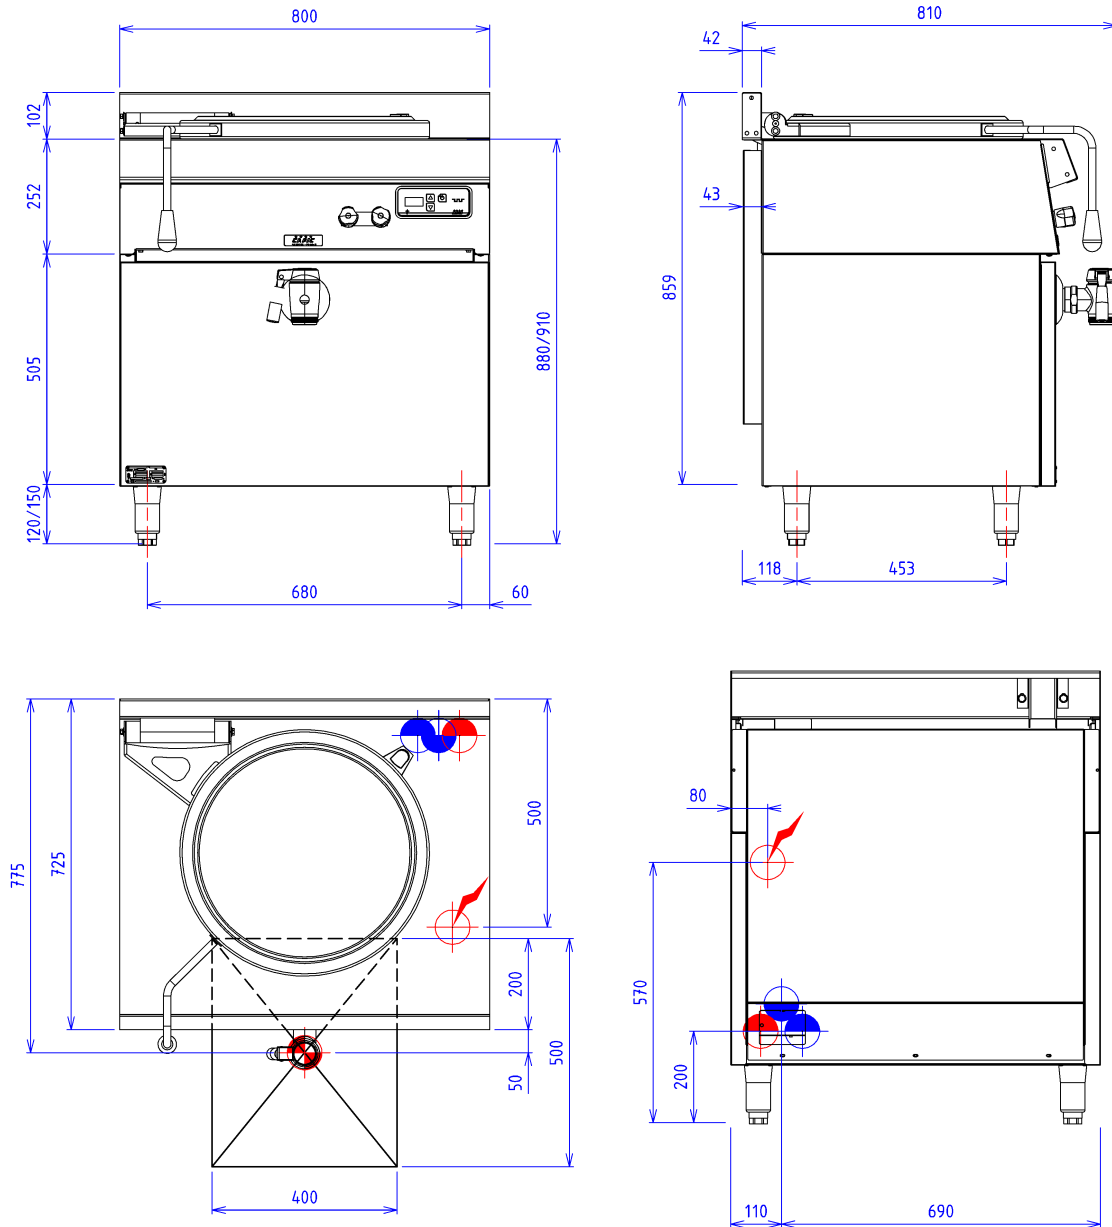

## ELECTRIC



Electric power : 9.00kW

Elec Réserve : - Elec fitting : 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335