



### Characteristics

External dimensions : 800 X 835 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top

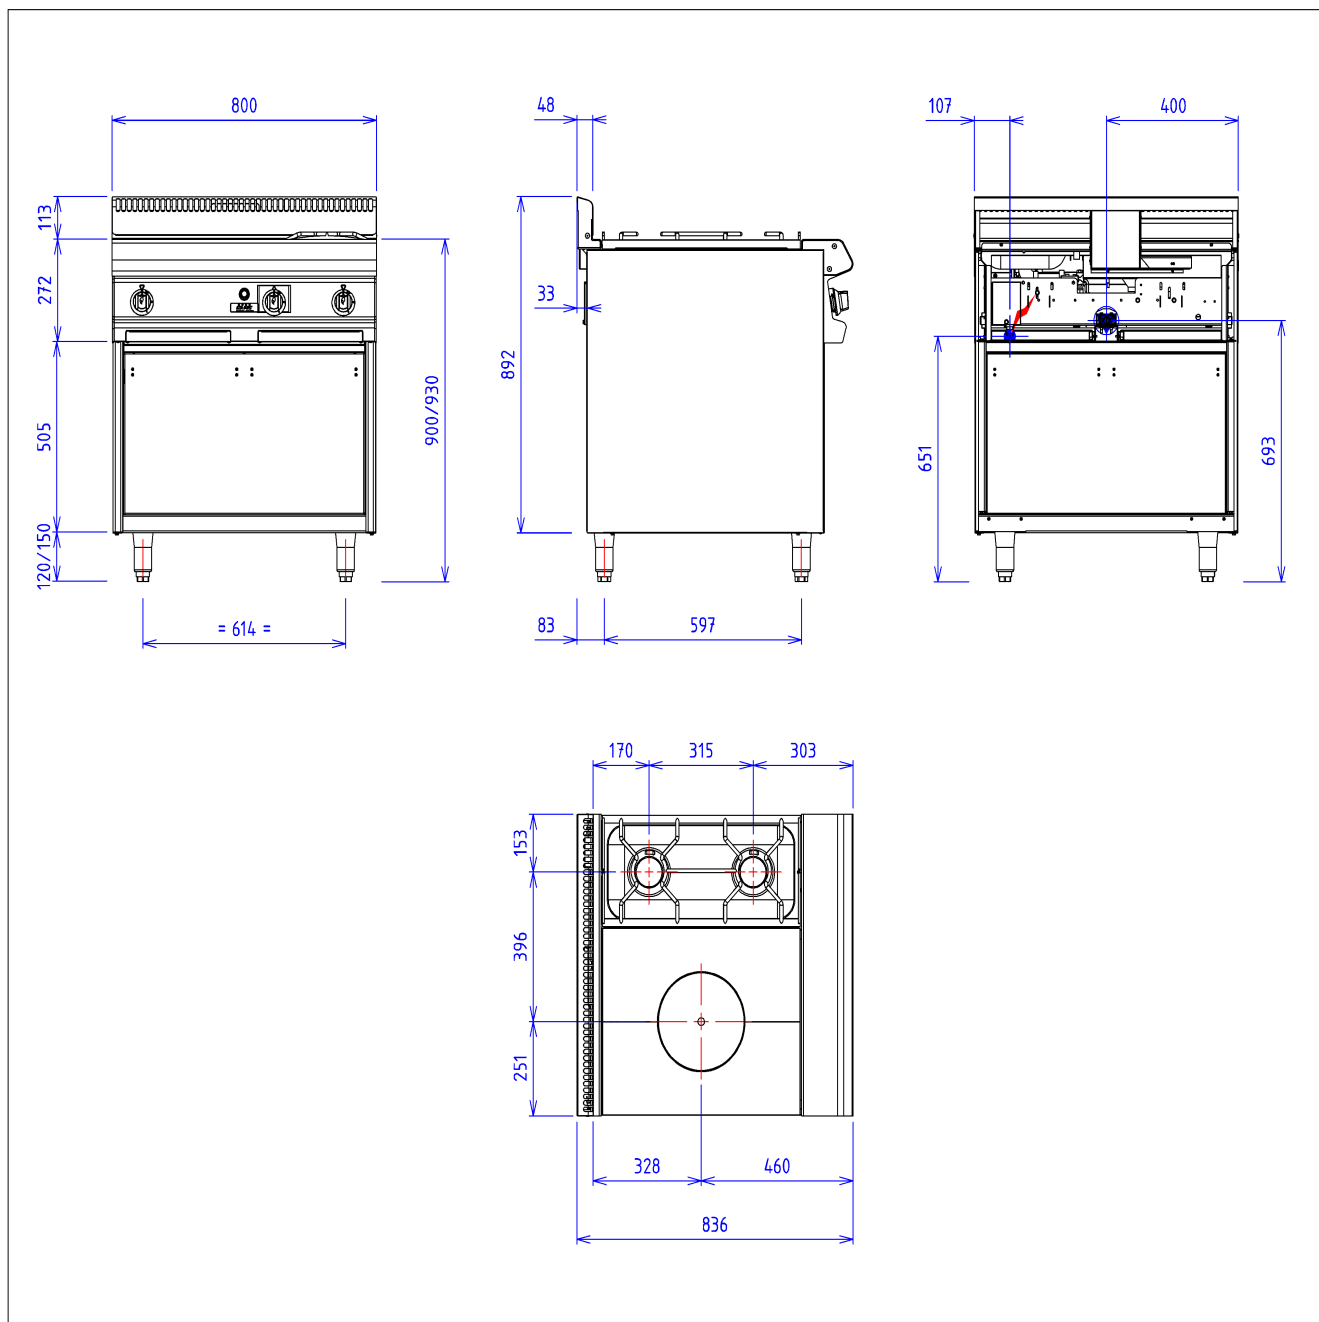
2 open burners on right  
 removable burners with pilot light 2x6kw  
 Burner griddles in stainless steel, dimensions : 300x600  
 Stamped tank & cleaning tray  
 cast iron hot plate in 2 parts Dim : 500x600  
 Plots to spread the heat  
 Fireplace in brick refractory with  
 protective shell of cast iron, central burner  
 removable of 8kW  
 cleaning tray under the plate  
 Security by thermocouple with pilotlight  
 secured and protected commands

### Options :

s/s steel trim bardiam 38 - linear meter (X081001)  
 gaz connection kit for hose per device (X901405)  
 electric ignition gas burner each other gas burner (X901502)

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 800x724x650  
 Interior dimensions : 730x656x430  
 Front without any visible screw

**GAS**

Gas power : 20kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

**ELECTRIC**

Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE( Si option électrique sélectionnée)  
 Electrical devices standard to the norm EN 60-335