



Characteristics

External dimensions : 800 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


2 open burners on left
 removable burners with pilot light 2x6kw
 Burner griddles in stainless steel, dimensions : 300x600
 Stamped tank & cleaning tray
 cast iron hot plate in 2 parts Dim : 500x600
 Plots to spread the heat
 Fireplace in brick refractory with
 protective shell of cast iron, central burner
 removable of 8kW
 cleaning tray under the plate
 Security by thermocouple with pilotlight
 secured and protected commands

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 10 kW thermostat 50 à 300°C
 Removable steel bottom 6 mm thickness
 Security pilot and thermocouple
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1

Options :

s/s steel trim bardiam 38 - linear meter (X081001)
 table for trim bar - 500mm (X081002)
 table for trim bar - 800mm (X081003)
 connecting plate for foot removal (X087004)
 gaz connection kit for hose per device (X901405)
 electric ignition gas burnereach other gas burner (X901502)

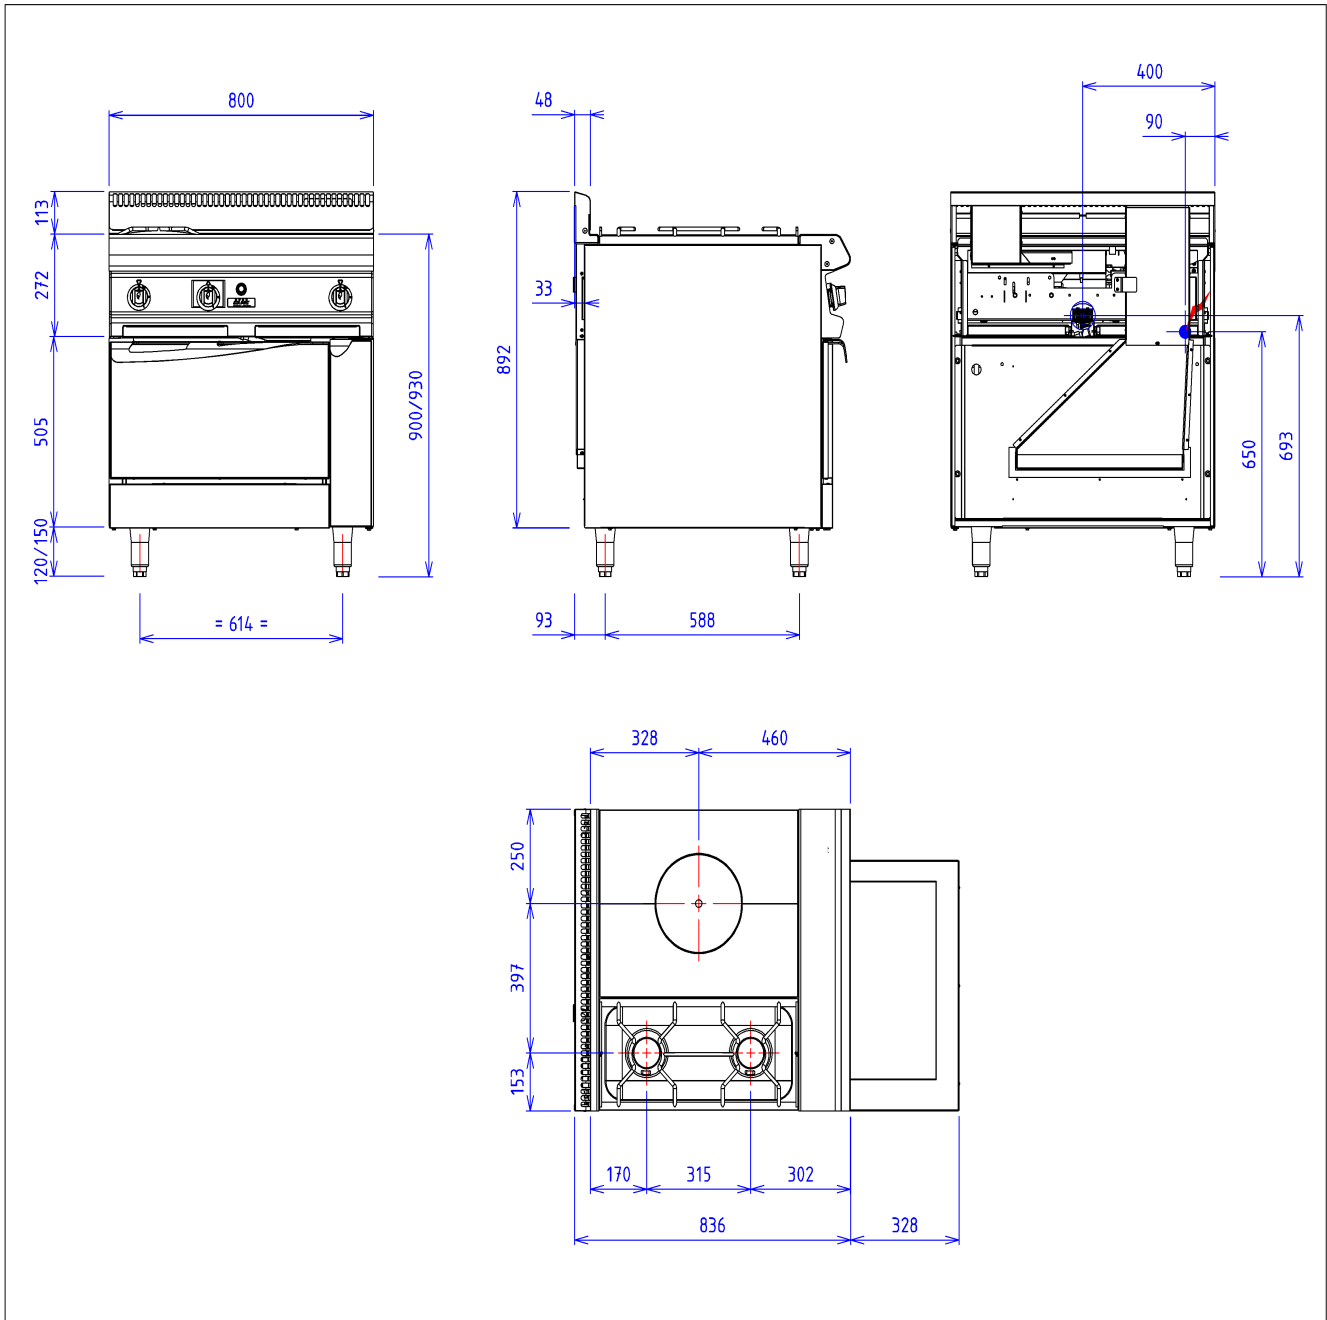

GAS



Gas power : 30kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335