



Characteristics

External dimensions : 800 X 835 X 900
Stainless steel top 18.10 planetary planetary brushed finish
Top thickness : 3 mm
body 1 mm in planetary brushed stainless steel
Structure : 2 mm in stainless steel
folded front edge radius 20 mm
Back edge forming a chimney cover
Front without any visible screw

Top

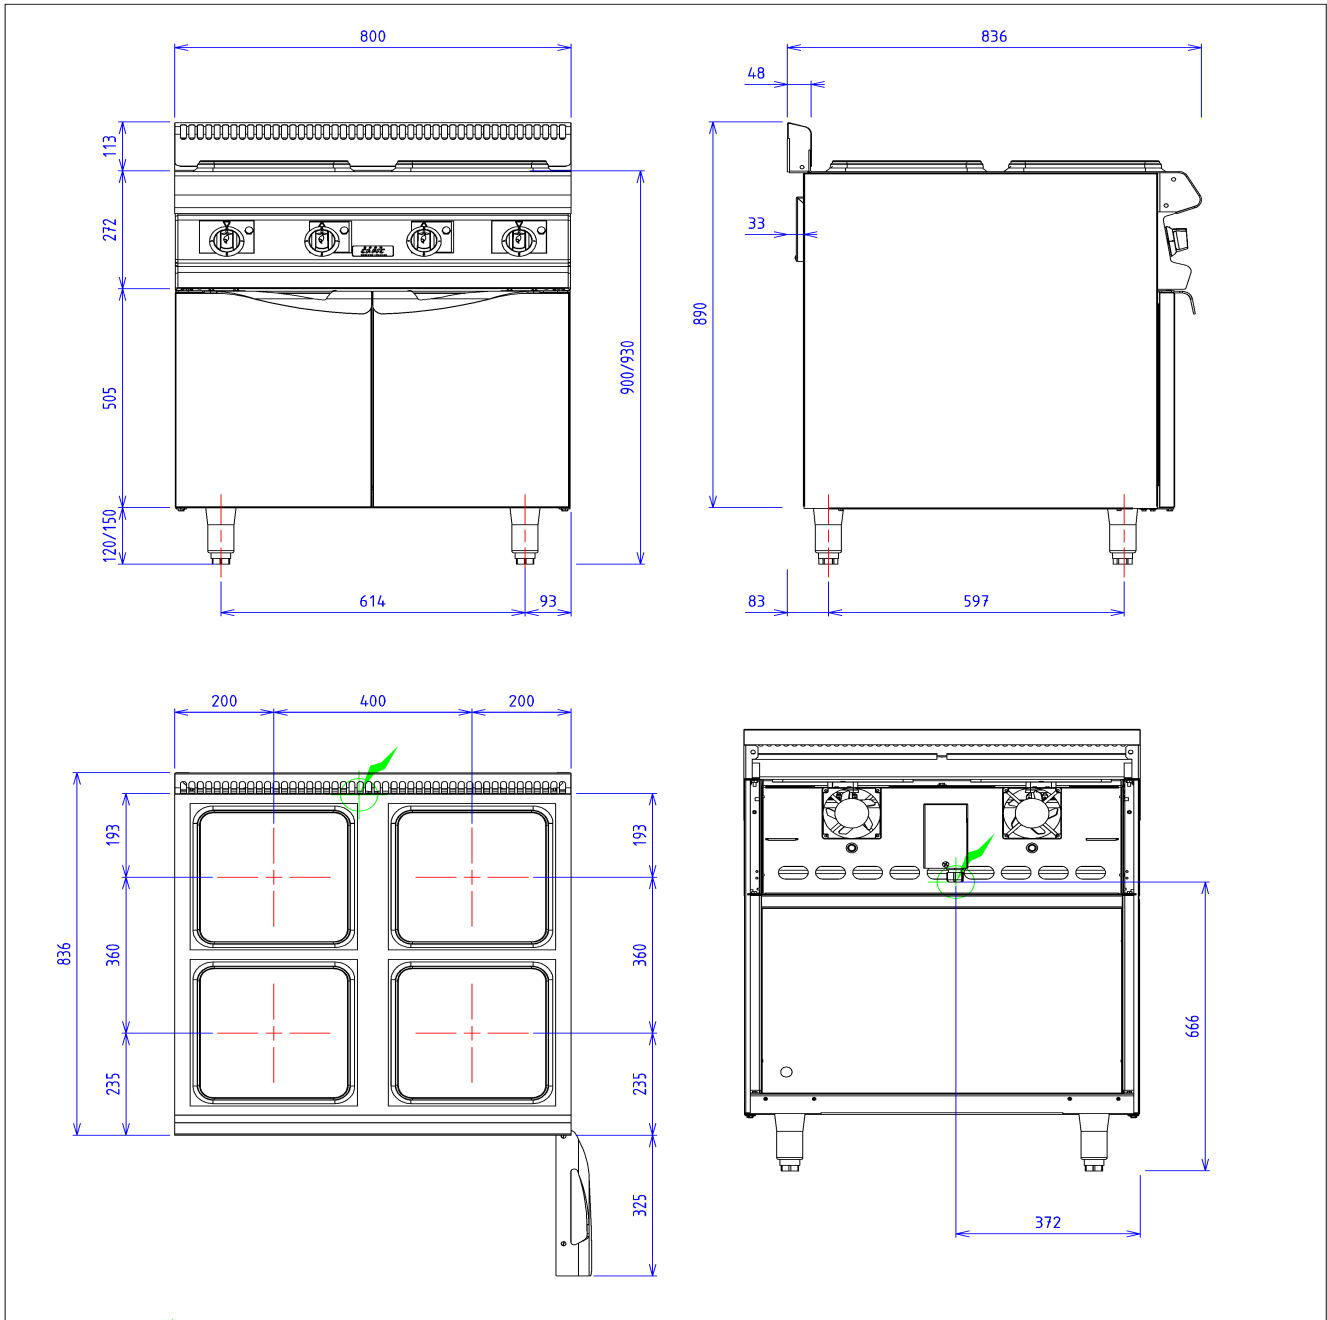
4 square cast iron electric plates smooth and waterproof
Power : 4x4 kW
4 positions switch
Indicator light

Base unit

Construction in stainless steel 18.10
Structure 2 mm
body 1 mm
External dimensions : 800x724x650
Interior dimensions : 600x656x380
intermediate shelf
Front without any visible screw
Double skin doors
Power 1,5 kW
Regulation by thermostat 0-85°C

Options :

s/s steel trim bardiam 38 - linear meter (X081001)

**ELECTRIC**

Electric power : 17.50kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335