

### Characteristics

External dimensions : 500 X 835 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top


cast iron hot plate in 2 parts Dim : 500x600  
 Plots to spread the heat  
 Fireplace in brick refractory with  
 protective shell of cast iron, central burner  
 removable of 8kW  
 Security by thermocouple with pilotlight  
 secured and protected commands

### Options :

s/s steel trim bardiam 38 - linear meter (X081001)  
 gaz connection kitfor hose per device (X901405)  
 electric ignition gas burner(first gas burner) (X901501)

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 500x724x650  
 Interior dimensions : 430x656x430  
 Front without any visible screw

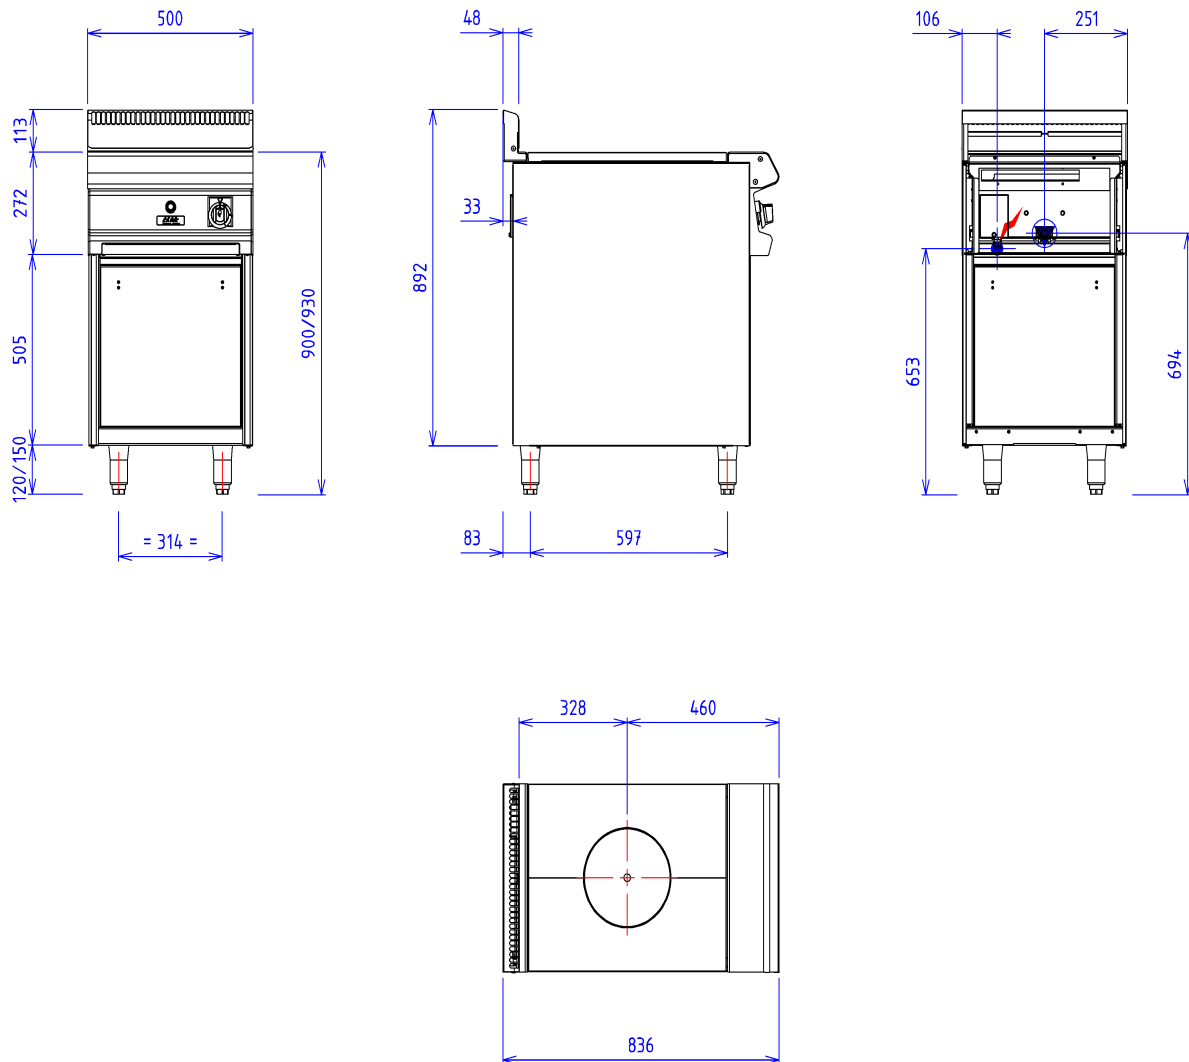

## GAS



Gas power : 8kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

## ELECTRIC



Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE( Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335