



Characteristics

External dimensions : 400 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


2 open burners
 removable burners with pilot light 2x6kw
 Burner griddles in stainless steel, dimensions : 400x600
 Stamped tank & cleaning tray
 Security by thermocouple with pilotlight
 secured and protected commands

Options :

s/s steel trim bardiam 38 - linear meter (X081001)
 gaz connection kitfor hose per device (X901405)
 electric ignition gas burnereach other gas burner (X901502)

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 400x724x650
 Interior dimensions : 330x656x430
 Front without any visible screw
 Double skin door

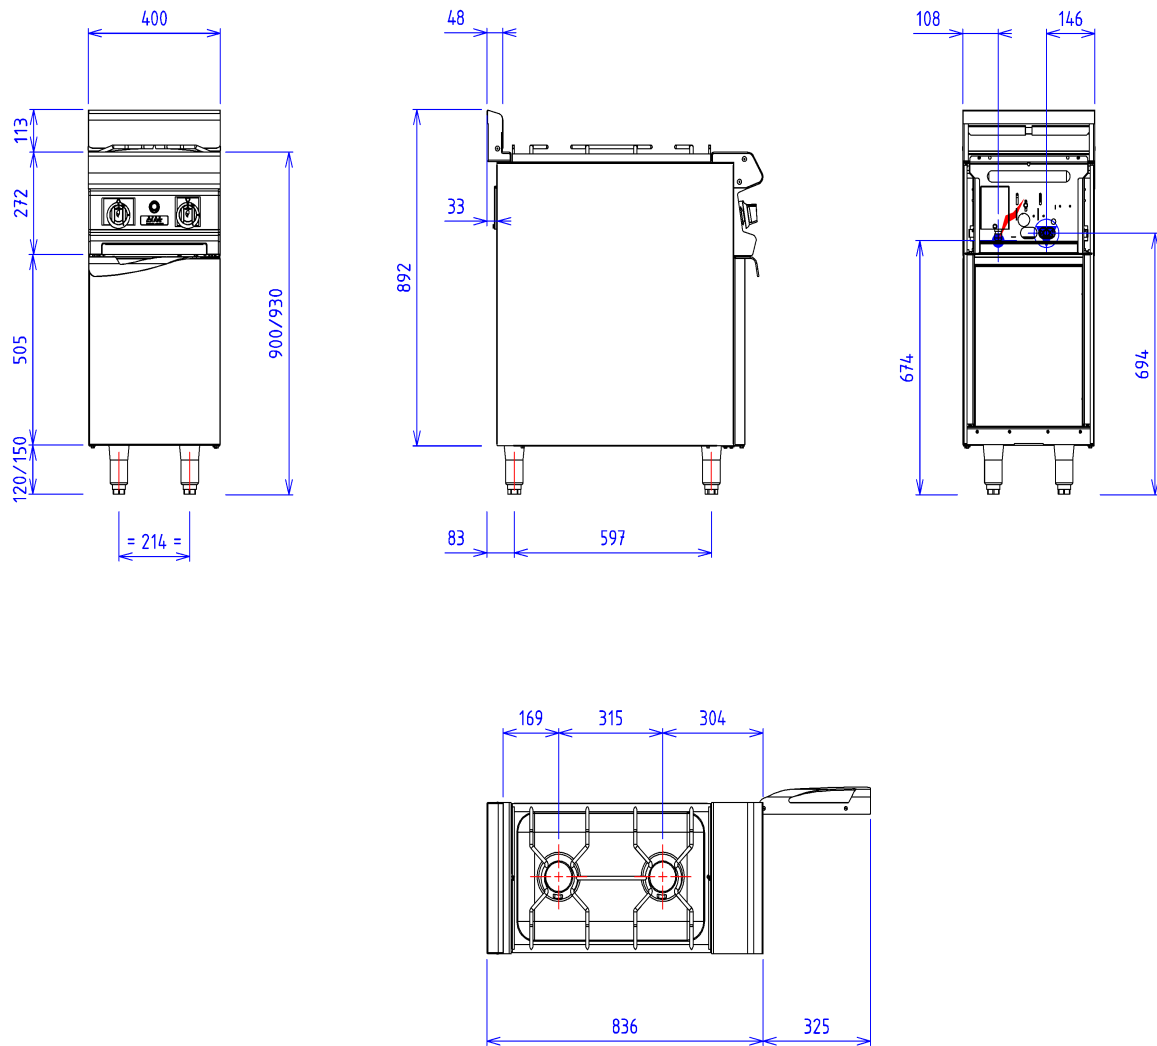

GAS



Gas power : 12kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.00kW

Elec Réserve : - Elec fitting :

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335