



### Characteristics

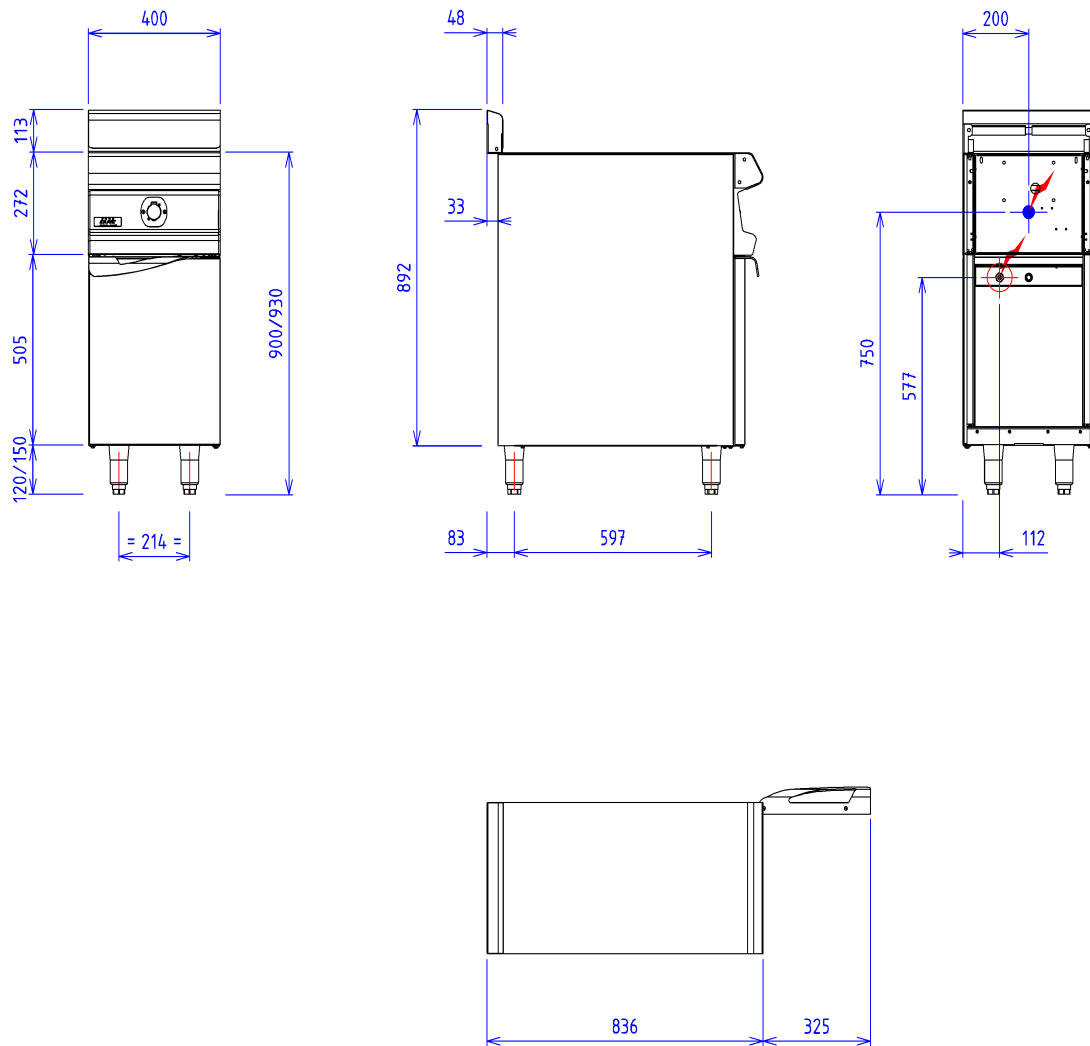
External dimensions : 400 X 835 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 400x724x650  
 Interior dimensions : 330x656x310  
 intermediate shelf  
 Front without any visible screw  
 Double skin door  
 Power 850 W  
 Regulation by thermostat 0-85°C

### Options :

worktop cut out with removable salting tank (X080602)  
 s/s steel trim bardiam 38 - linear meter (X081001)  
 lateral swing doorfor technical cupboard (X081111)  
 neutral unit cut outin technical cupboard (X081112)  
 sliding drawer for gn1/1frame depth 100 (X081113)  
 electric outlet on front panel (X330311)  
 goose neck watertaprotating (X902001)  
 cold&hot water supply on water column 500mm (X902002)

**ELECTRIC**

Electric power : 0.85kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

230V SINGLE( Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335