



Characteristics


External dimensions : 800 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 5.1kW thermostat 50 à 300°C
 Commutateur et Lighting indicator
 Reinforced stainless steel resistances located
 all around top and bottom
 heating together or separately
 Removable steel bottom 6 mm thickness
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1

Options :

worktop cut out with removable salting tank (X080602)
 s/s steel trim bardiam 38 - linear meter (X081001)
 sliding drawer for gn1/1 (X081113)
 electric outlet on front panel (X330311)
 stand for salamander on neutral unit (X901941)
 goose neck valverotating (X902001)
 cold&hot water supply on water column 500mm (X902002)

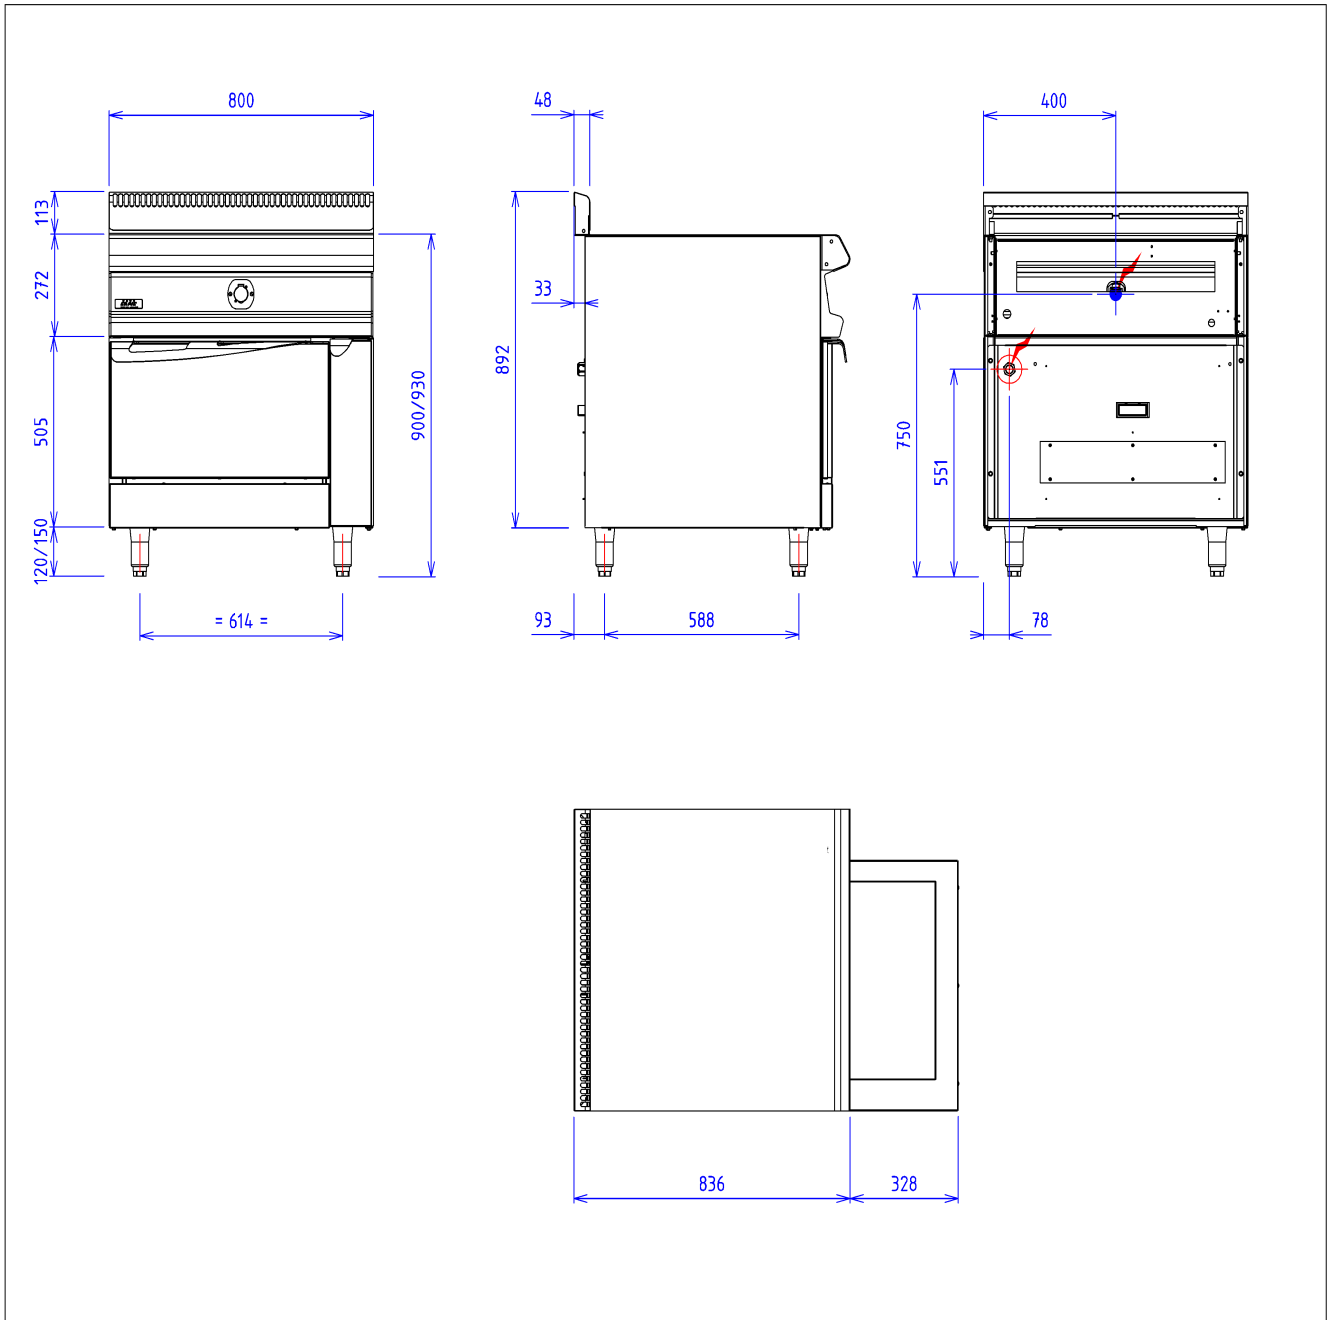

ELECTRIC



Electric power : 5.10kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE

230V SINGLE(Si option électrique sélectionnée)
Electrical devices standard to the norm EN 60-335