



### Characteristics

External dimensions : 400 X 835 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top

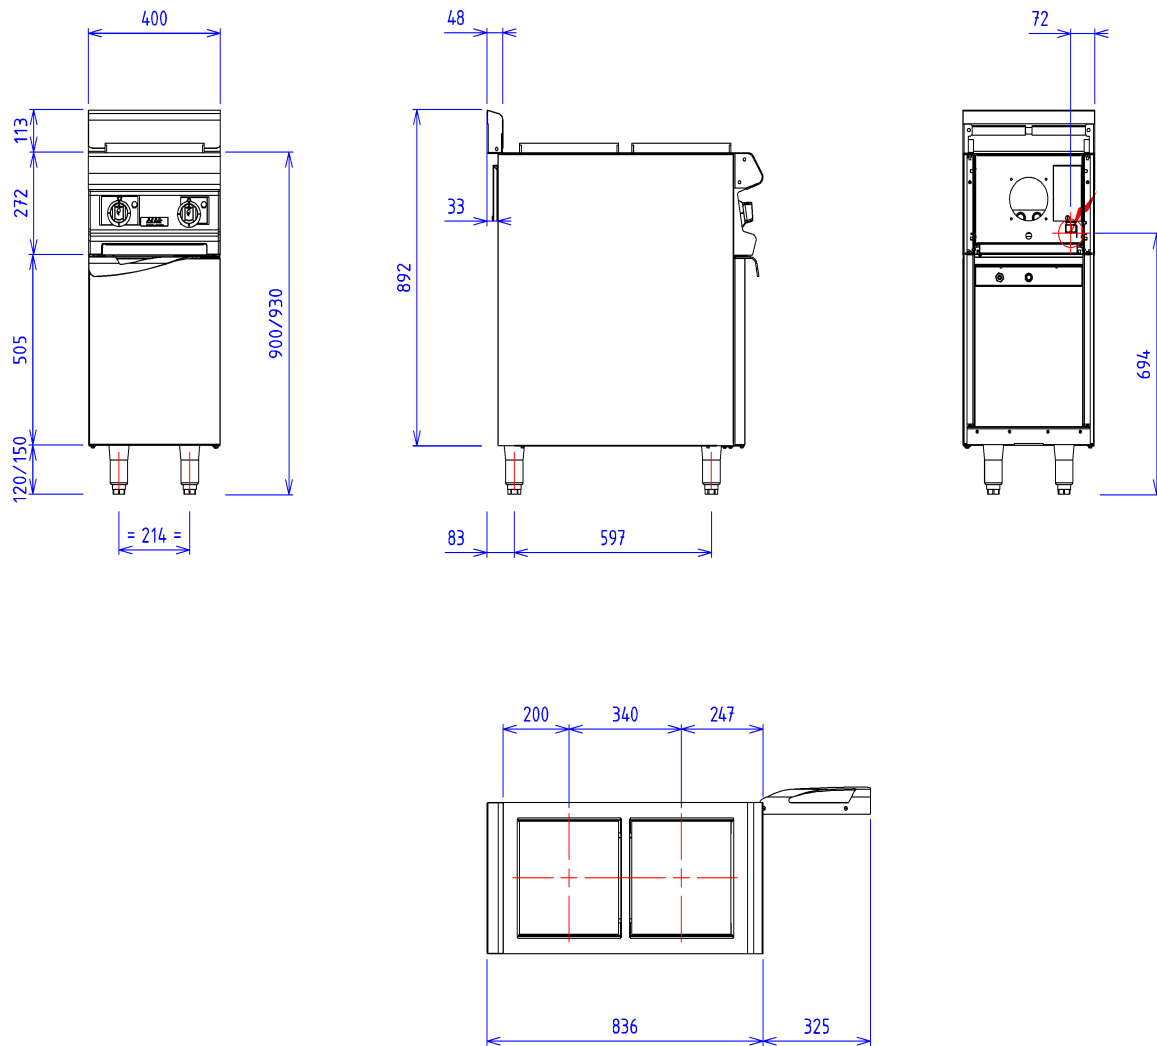
2 square cast iron electric plates  
 Power : 2x4 kW  
 4 positions switch  
 Indicator light

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 400x724x650  
 Interior dimensions : 330x656x310  
 intermediate shelf  
 Front without any visible screw  
 Double skin door  
 Power 850 W  
 Regulation by thermostat 0-85°C

### Options :

s/s steel trim bardiam 38 - linear meter (X081001)

**ELECTRIC**

Electric power : 8.85kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting  
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335