



Characteristics

External dimensions : 800 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


18.10 stainless steel tank, thick 2mm
 Tank dimensions : 626x510x220
 For GN 2/1 tray (not provided)
 Heating by reinforced stainless steel resistances
 Regulation by thermostat 30-110°C
 Power : 7,2 kW
 Cold or hot water supply
 Waste plug dumping to be connected

Options :

s/s steel trim bardiam 38 - linear meter (X081001)
 junction barlength 530 (X900422)

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Interior dimensions : 730x656x430
 Front without any visible screw

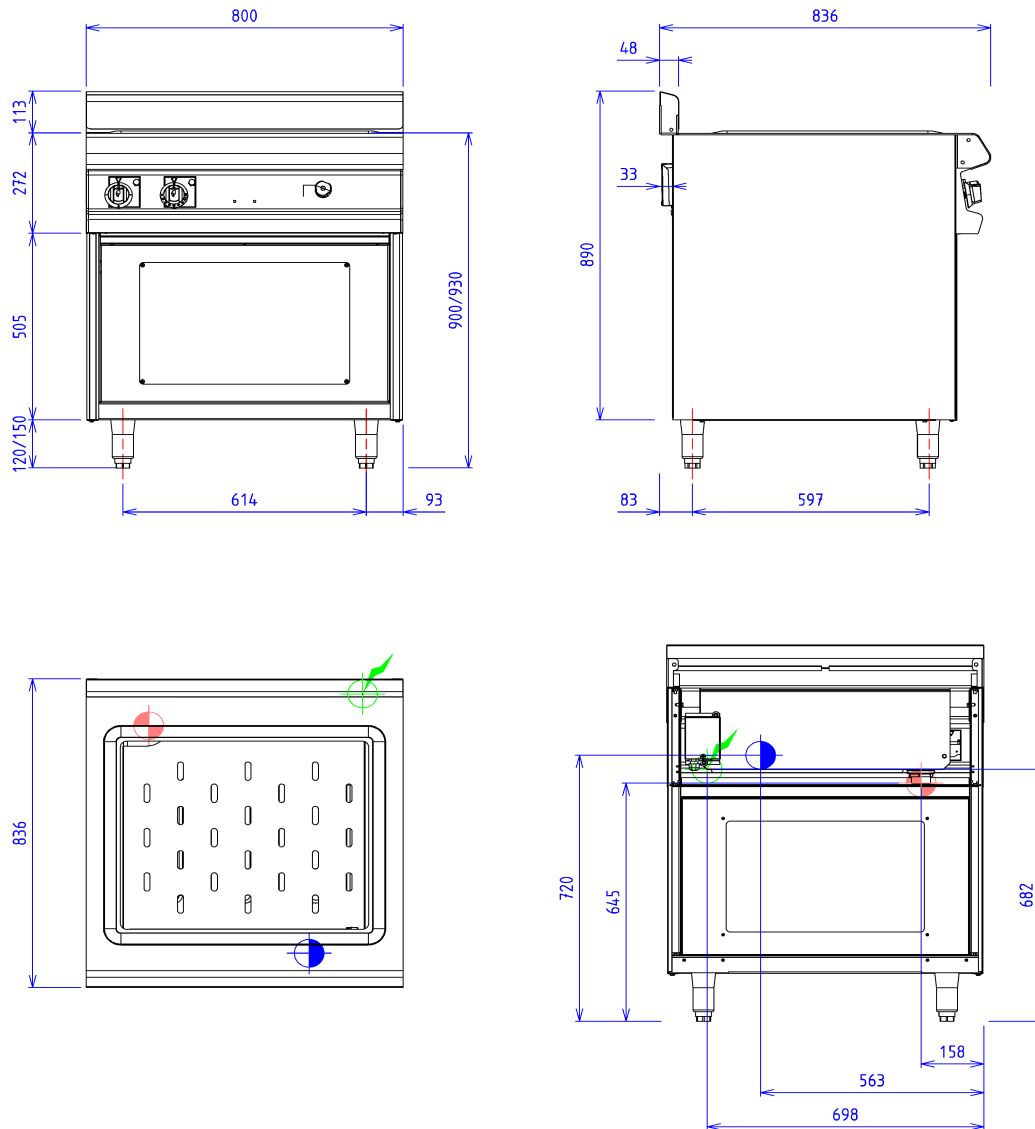

ELECTRIC



Electric power : 7.20kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE phases

Electrical devices standard to the norm EN 60-335

WATER/AIR



Drain fitting : 40/49 threaded sleeve (1.1 / 2)