



### Characteristics

External dimensions : 400 X 835 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top

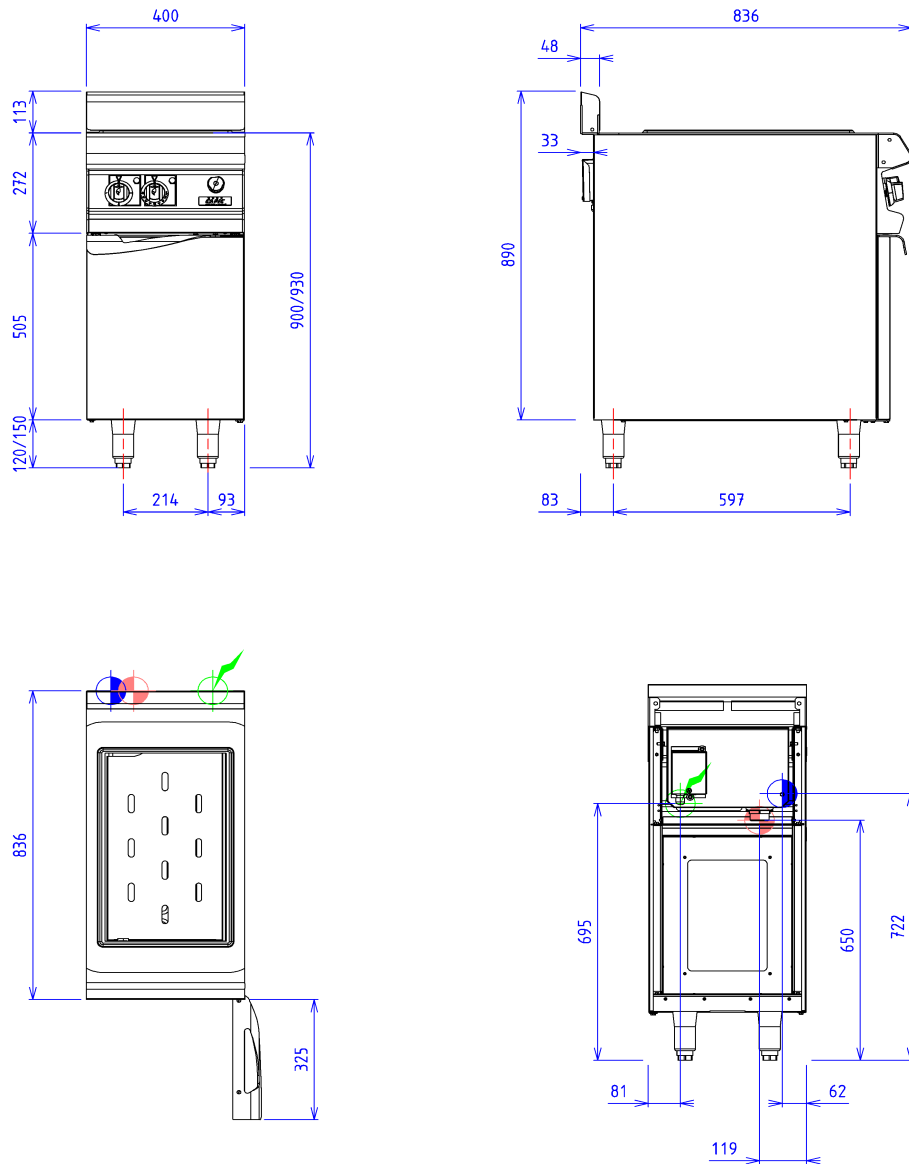
18.10 stainless steel tank, thick 2mm  
 Tank dimensions: 306x510x220  
 For GN 1/1 tray (not provided)  
 Heating by reinforced stainless steel resistances  
 Regulation by thermostat 30-110°C  
 Power : 2,4 kW  
 Cold or hot water supply  
 Waste plug dumping to be connected

### Options :

s/s steel trim bardiam 38 - linear meter (X081001)  
 junction barlength 325 (X900421)

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 400x724x650  
 Interior dimensions : 330x656x430  
 Front without any visible screw  
 Double skin door

**ELECTRIC**

Electric power : 2.40kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335

**WATER/AIR**

Drain fitting : 40/49 threaded sleeve (1.1 / 2)