



### Characteristics

External dimensions : 800 X 835 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw

### Top


18.10 stainless steel tank, thick 2mm  
 Tank dimensions : 626x510x220  
 For GN 2/1 tray (not provided)  
 Heating by reinforced stainless steel resistances  
 Regulation by thermostat 30-110°C  
 Power : 7,2 kW  
 Cold or hot water supply  
 Waste plug dumping to be connected

### Options :

s/s steel trim bardiam 38 - linear meter (X081001)  
 junction barlength 530 (X900422)

### Base unit

Construction in stainless steel 18.10  
 Structure 2 mm  
 body 1 mm  
 External dimensions : 800x724x650  
 Interior dimensions : 730x656x430  
 Front without any visible screw  
 Double skin doors

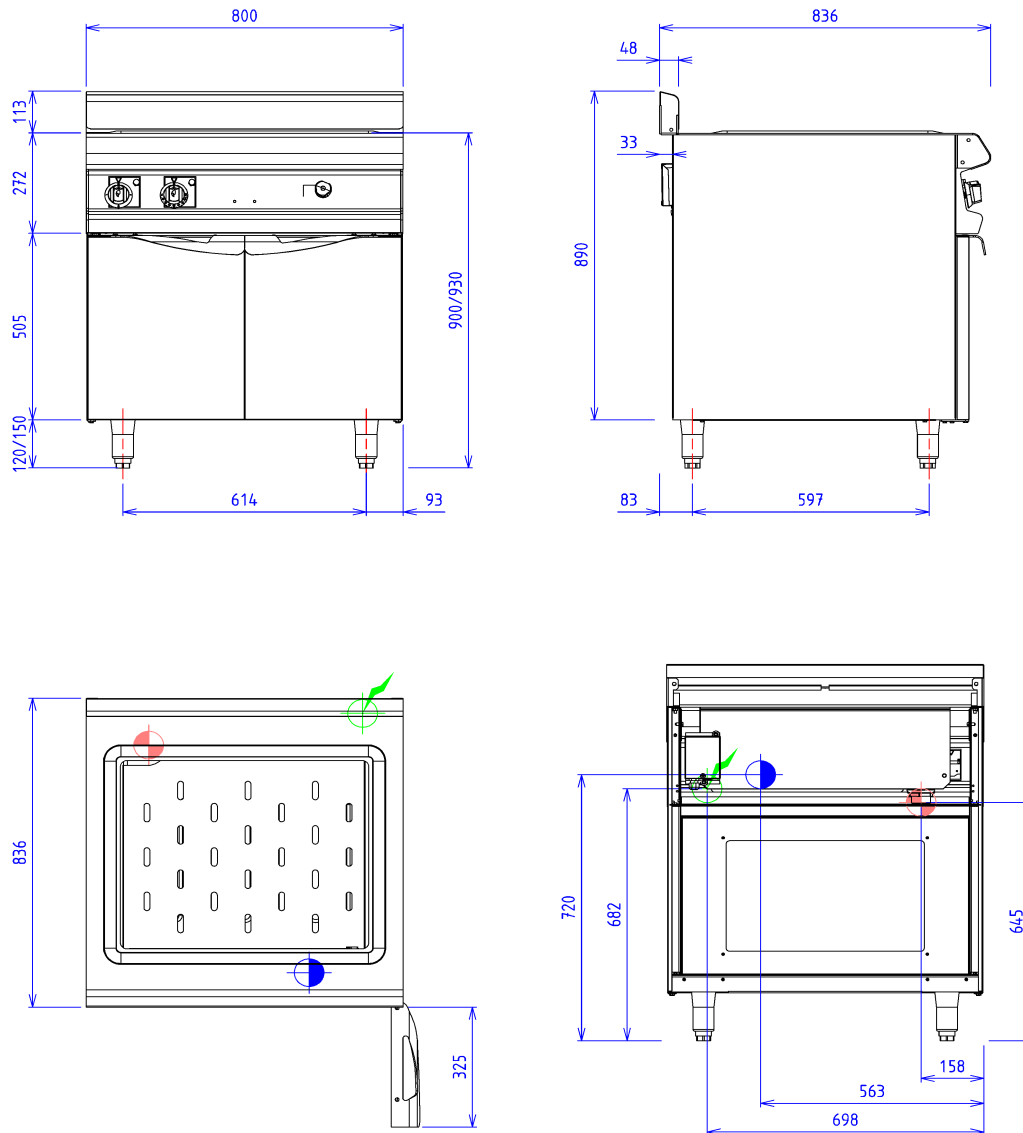

## ELECTRIC



Electric power : 7.20kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 400V THREE phases

Electrical devices standard to the norm EN 60-335

## WATER/AIR



Drain fitting : 40/49 threaded sleeve (1.1 / 2)