

Characteristics

External dimensions : 400 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


Ribbed and sloping cast iron plate : 400x550
 Power : 8 kW
 regulated flow by a 3-positions tap
 Heating by gas stainless steel ramps with great thickness
 Security pilot and thermocouple
 Splash gard
 Drawer to collect greases

Options :

s/s steel trim bardiam 38 - linear meter (X081001)
 gaz connection kitfor hose per device (X901405)
 electric ignition gas burner(first gas burner) (X901501)

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 400x724x650
 Interior dimensions : 330x656x430
 Front without any visible screw

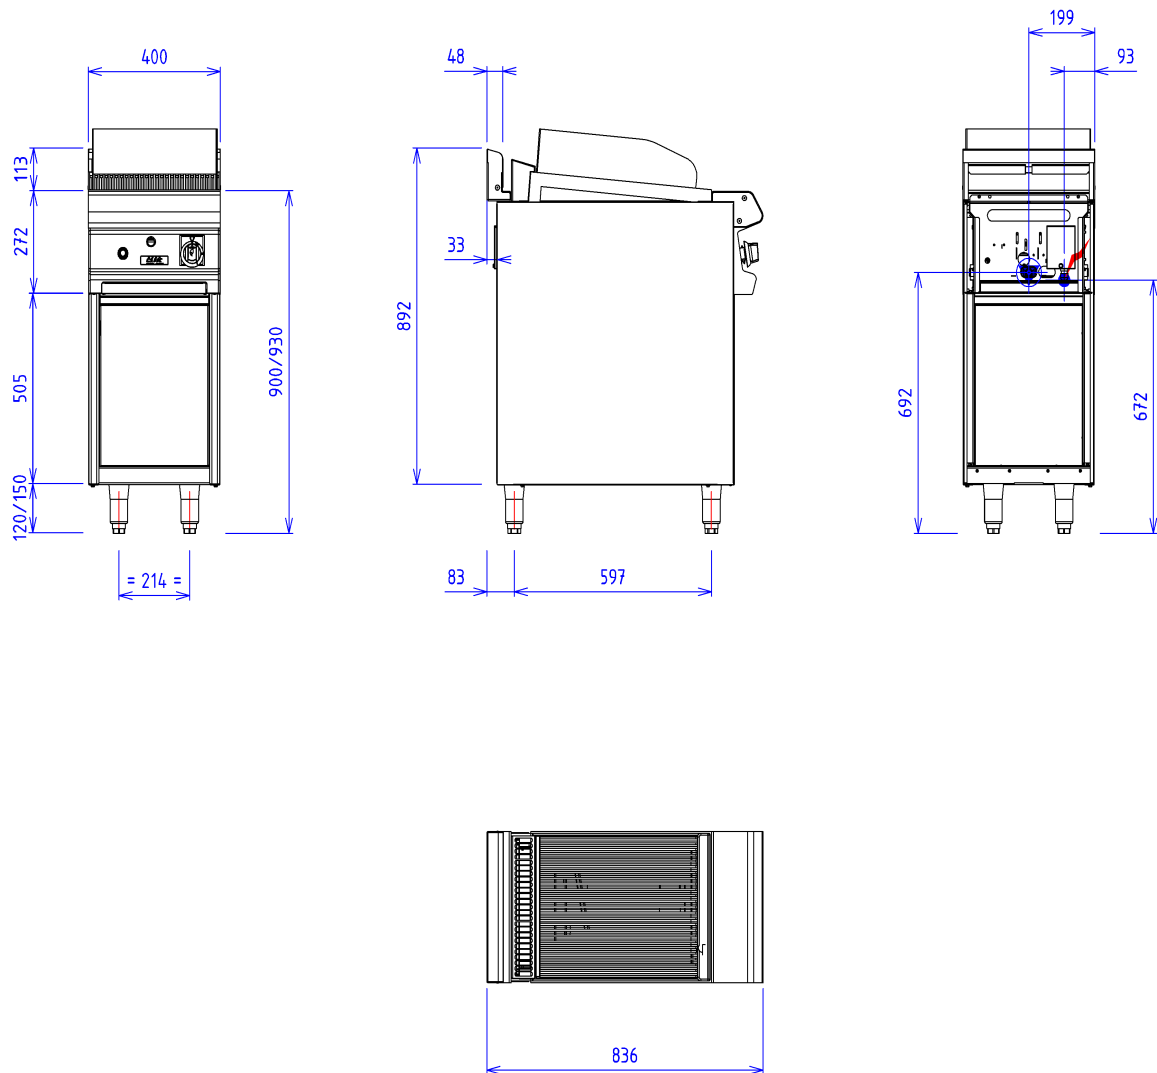

GAS



Gas power : 8kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.00kW

Elec Réservation : - Elec fitting :

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335