

PLATE 620X585 CLOSED CUPBOARD

**Characteristics**

External dimensions : 800 X 835 X 270
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top




DUPLEX stainless steel plate, thickness 20 mm
 Dimensions : 620x585
 Power : 15.3 kW
 Heating with PMD plates (CAPIC patent)
 pressed against the bottom of the plate
 200°C reached in less than 6 minutes
 Electronic regulation from 50 to 250°C
 4 independently thermostated heating zones
 Peripheral channel with water circulation and waste basket
 Overflow plug with external drain to be connected
 Access to the technical zone with a tilting plate

Options :

lateral splash guard for plancha front 800 (X900630)

Base unit

Construction in stainless steel 18.10
 Bratt pan in stainless steel - 2 mm thick
 body in stainless steel thickness 1 mm
 External dimensions : 800x724x650
 Internal dimensions 730x556x430
 Front without any visible screw
 Double skin doors

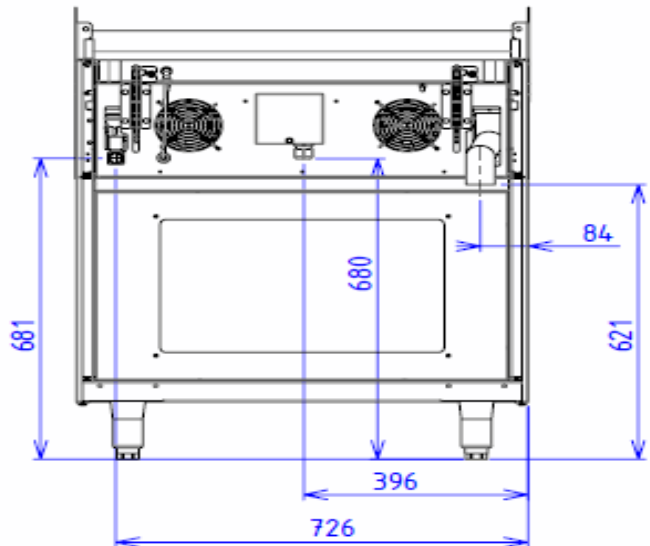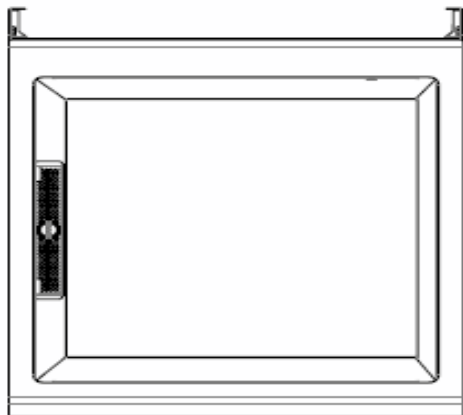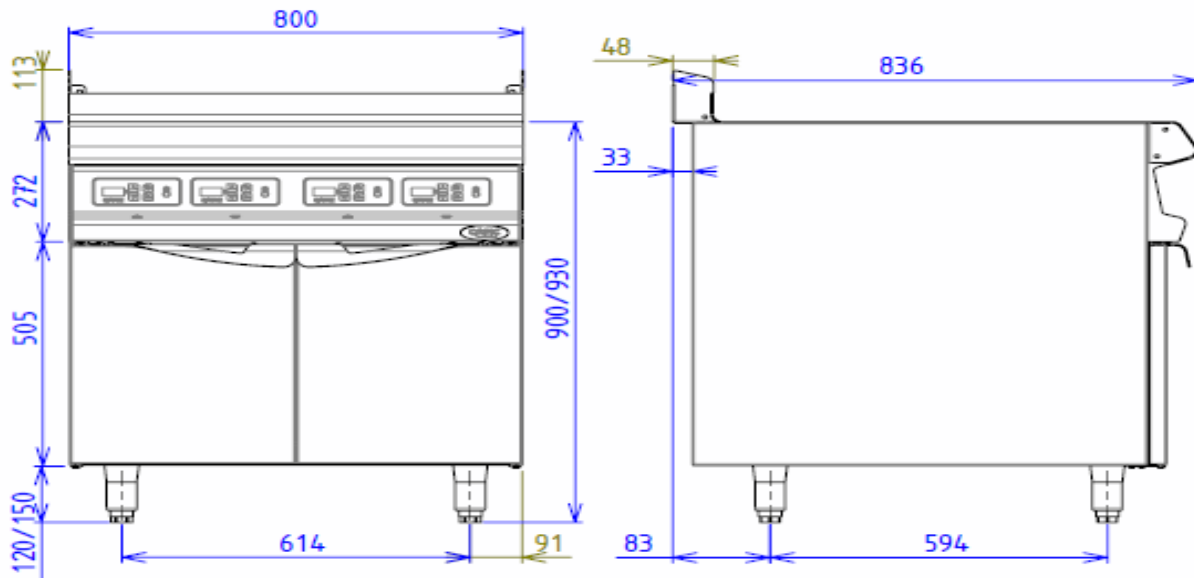

ELECTRIC



Electric power : 15.30kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335

WATER/AIR



Cold water fitting :15/21 CYLINDER



Drain fitting :Ø 40mm tube