

Characteristics

External dimensions : 800 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


Special stainless steel plate 18.10 thickness 15 mm
 Dimensions : 515x620
 Power : 6 kW
 cleaning drawer
 Heating by reinforced stainless steel resistances
 pressed against the bottom of the plate
 2 heating zones controlled by independent thermostats
 Scraper included
 peripheral water trough for easy cleaning
 over-flow and draining stopper
 cleaning and waste water drawer

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 800x724x650
 Front without any visible screw
 Dimension of the retort : 650x530x280
 Walls insulated by mineral fibers
 aluminium steam barrier
 Power 5.1kW thermostat 50 à 300°C
 Commutateur et Lighting indicator
 Reinforced stainless steel resistances located
 all around top and bottom
 heating together or separately
 Removable steel bottom 6 mm thickness
 stainless steel lateral walls
 with levels holding griddles
 Door to double wall insulated and balanced
 Provided with one stainless steel griddle GN2/1

Options :

mirror polishing chrome aspect (X050974)
 1/3 ribbed for plancha (X051501)
 1/2 ribbed for plancha (X051502)
 water feed channel controlled drain connection for plancha (X051521)
 s/s steel trim bardiam 38 - linear meter (X081001)
 lateral splash guard for plancha front 800 (X900630)

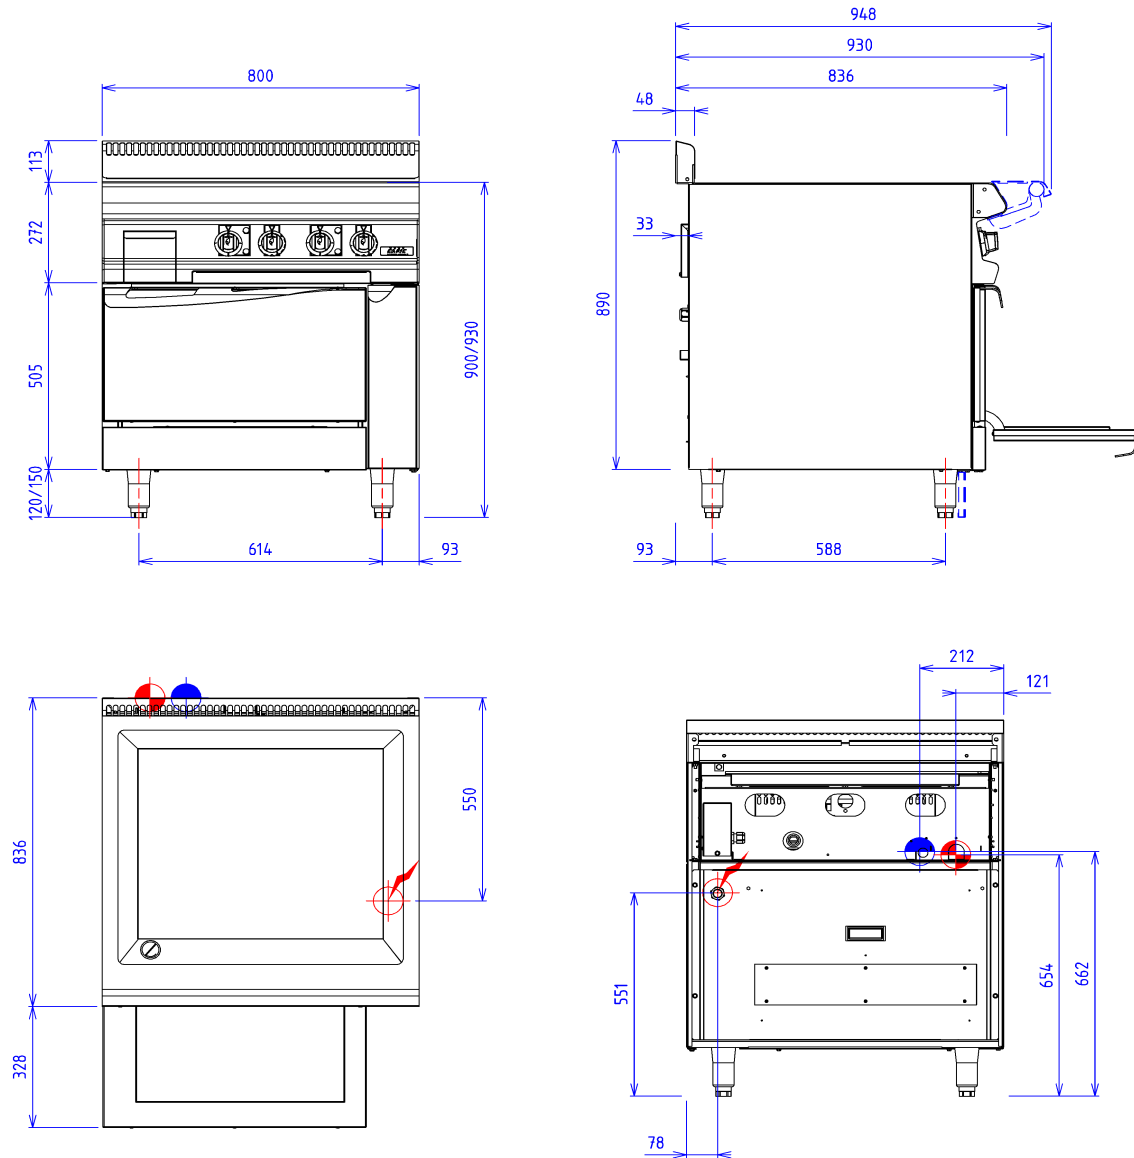

ELECTRIC



Electric power : 11.10kW

Elec Réserve : - Elec fitting : 400V THREE phases

Electrical devices standard to the norm EN 60-335