



Characteristics


External dimensions : 1000 X 835 X 900
Stainless steel top 18.10 planetary planetary brushed finish
Top thickness : 3 mm
body 1 mm in planetary brushed stainless steel
Structure : 2 mm in stainless steel
Stand with composite feet of 150 adjustable in height
folded front edge radius 20 mm
Back edge forming a chimney cover
Front without any visible screw

Top

2 stainless steel tanks 23 liters
Electric power 2x28 kW
Independent electronic temperature regulation by tank and safety thermostat
4 independent baskets automatic lifts with timer and programmable recipes
Integrated automatic filtration device with alarm associated with a number of operating cycles
Automatic filling system for oil booster with integrated accessory
Heating by oblong shielded stainless steel hinged heating elements

Base unit

Construction in stainless steel 18.10
Structure 2 mm
body 1 mm
Front without any visible screw
Double skin doors

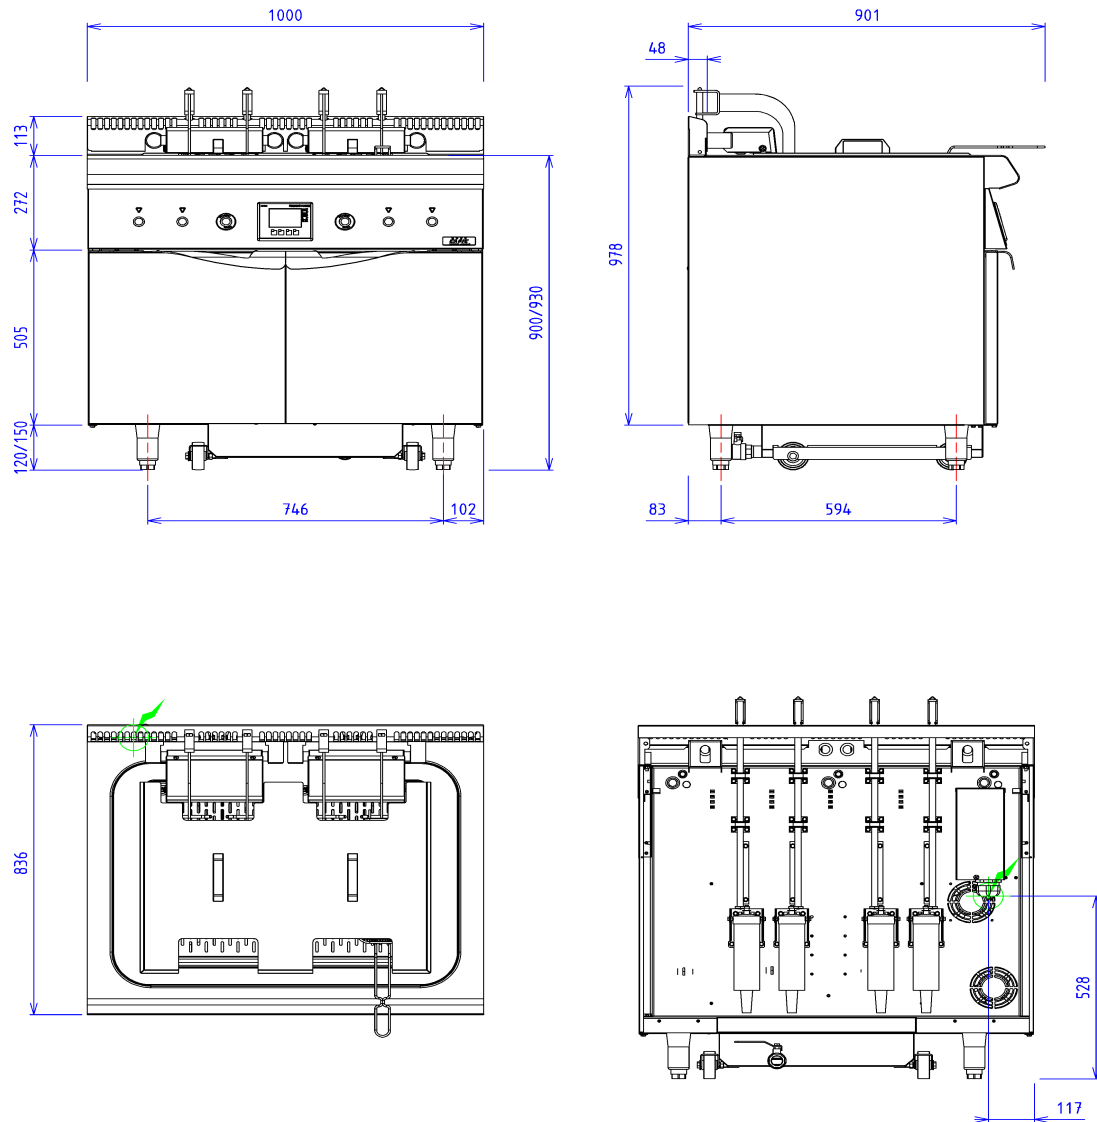

ELECTRIC



Electric power : 56.00kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335