



Characteristics

External dimensions : 400 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top


Heating by heating elements placed under the tank
 Control by On/off switch
 Lighting indicator
 Recessed removable tray GN1/1 with drainer grid

Base unit

Construction in stainless steel 18.10
 Structure 2 mm
 body 1 mm
 External dimensions : 400x724x650
 Interior dimensions : 330x656x430
 Front without any visible screw
 Double skin door

Options :

s/s steel trim bardiam 38 - linear meter (X081001)
 elec infra red lampfor preequiped unit (X382210)

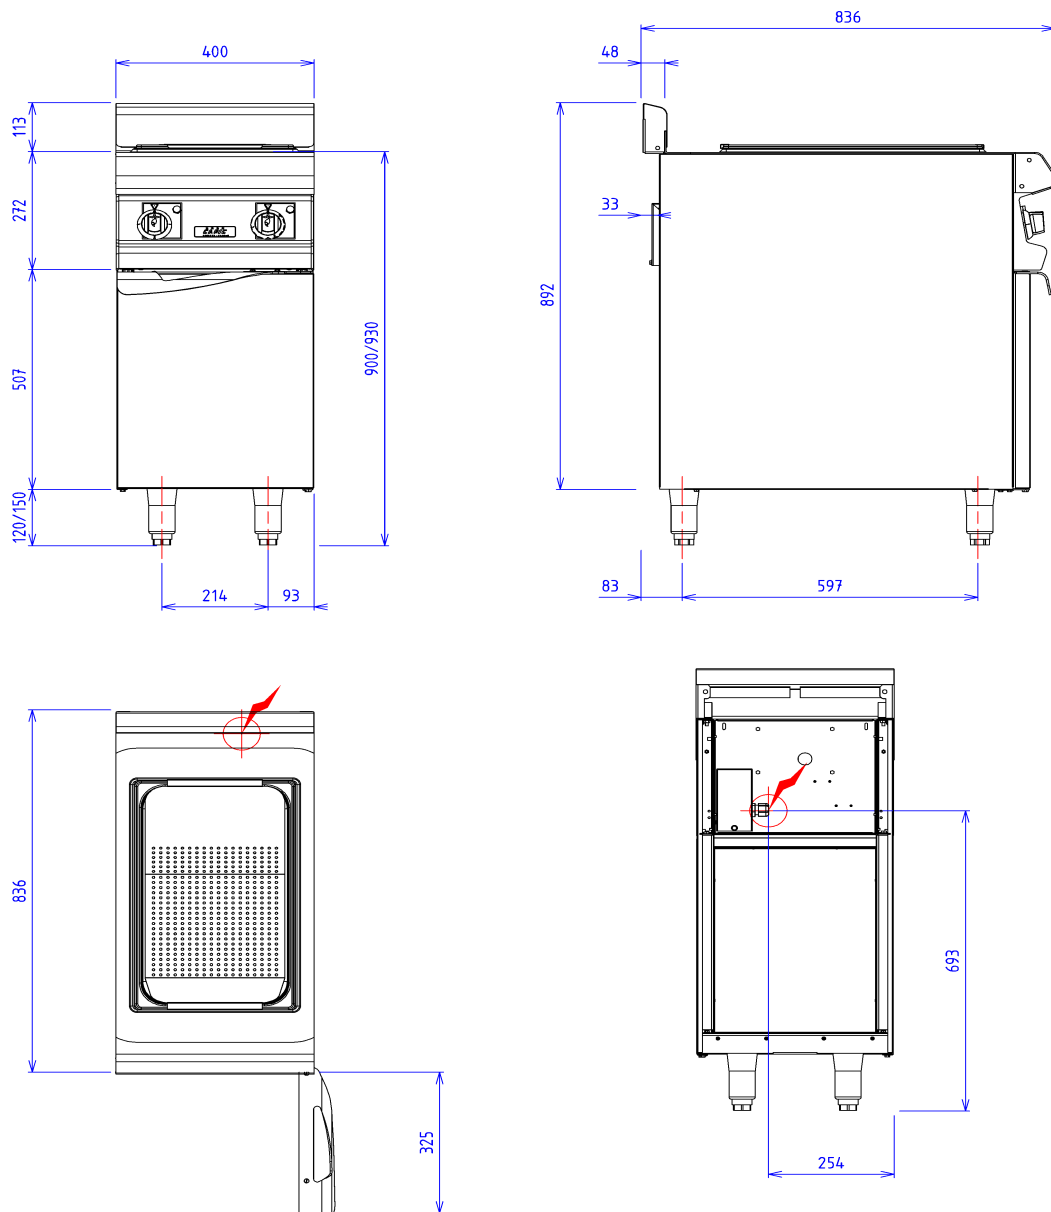

ELECTRIC



Electric power : 1.00kW

Elec Réserve : - Elec fitting : 230V SINGLE

230V SINGLE(Si option électrique sélectionnée)
Electrical devices standard to the norm EN 60-335