


CELTIC 150L ELEC BOILING PAN

BAIN-MARIE - HOT/COLD WATER

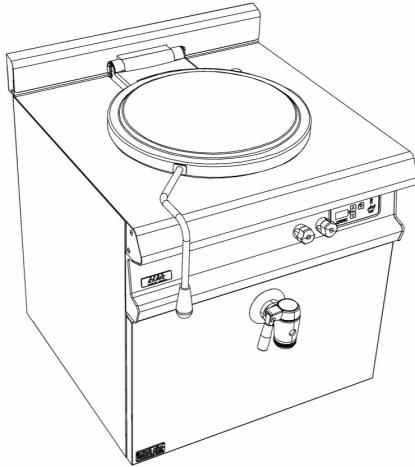

Characteristics


External dimensions : 800 X 835 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top

1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank (316L) and 18.10 stainless steel double cover
 welded on the top
 2mm thickness for the ferrule and 3mm for the bottom
 Dimensions (ØxP) : 603x550
 net capacity : 150 l.
 Power: 18 kW
 Lid handle with insulated end
 HW/CW supply by fixed tap
 controlled on the front by 1/4 turn tap
 with ceramic components
 Drain Valve 40/49 with retractable handle
 Removable strainer with level indication
 Immersed heater
 into the double skin
 Control by electronic card
 Thermostatic regulation
 Double skin with safety valve (0.5bar)
 Electronic regulation of the water level into the double skin

Options :

removable perforated lining for 235 l kettle for boiling kettle 100/150 (X294001)
 offset drain pipe for boiling kettle (X901802)

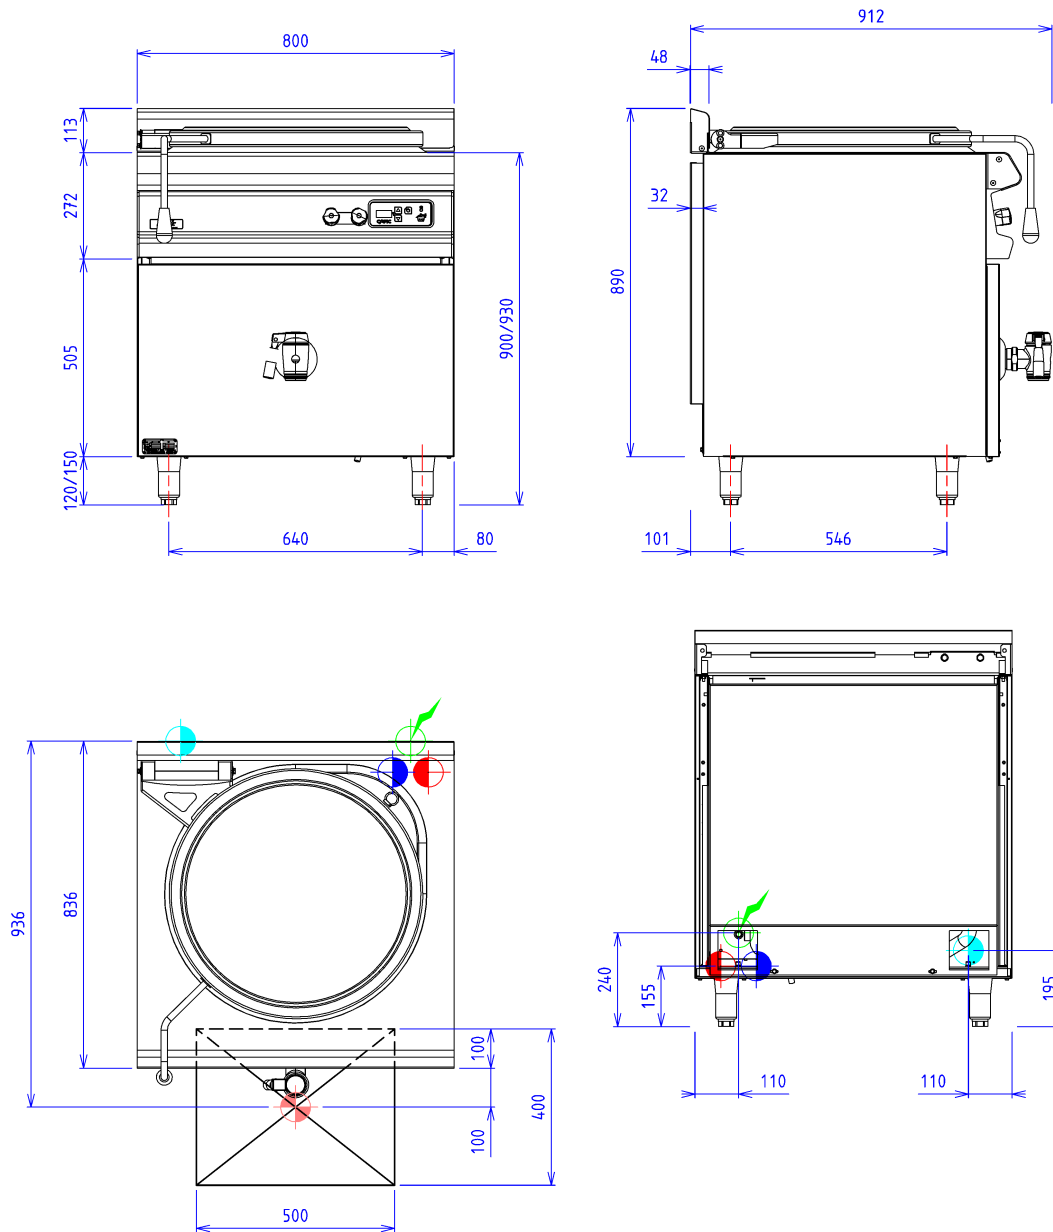

ELECTRIC



Electric power : 18.00kW

Elec Réservation : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335

WATER/AIR



Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE



Connection soft water :15/21 FLEXIBLE