

Characteristics


External dimensions : 800 X 835 X 900
 Stainless steel top 18.10 planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top

1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank (316L) and 18.10 stainless steel double cover
 welded on the top
 2mm thickness for the ferrule and 3mm for the bottom
 Dimensions (ØxP) : 603x390
 net capacity : 100 l.
 Power: 18 kW
 Lid handle with insulated end
 HW/CW supply by fixed tap
 controlled on the front by 1/4 turn tap
 with ceramic components
 Drain Valve 40/49 with retractable handle
 Removable strainer with level indication
 Heating by gas ramps
 Control by gas valve
 Security pilot and thermocouple
 Control by electronic card
 Thermostatic regulation
 Double skin with safety valve (0.5bar)
 Electronic regulation of the water level into the double skin
 Electric ignition

Options :

removable perforated lining for 235 l kettle for boiling kettle 100/150 (X294001)
 offset drain pipe for boiling kettle (X901802)

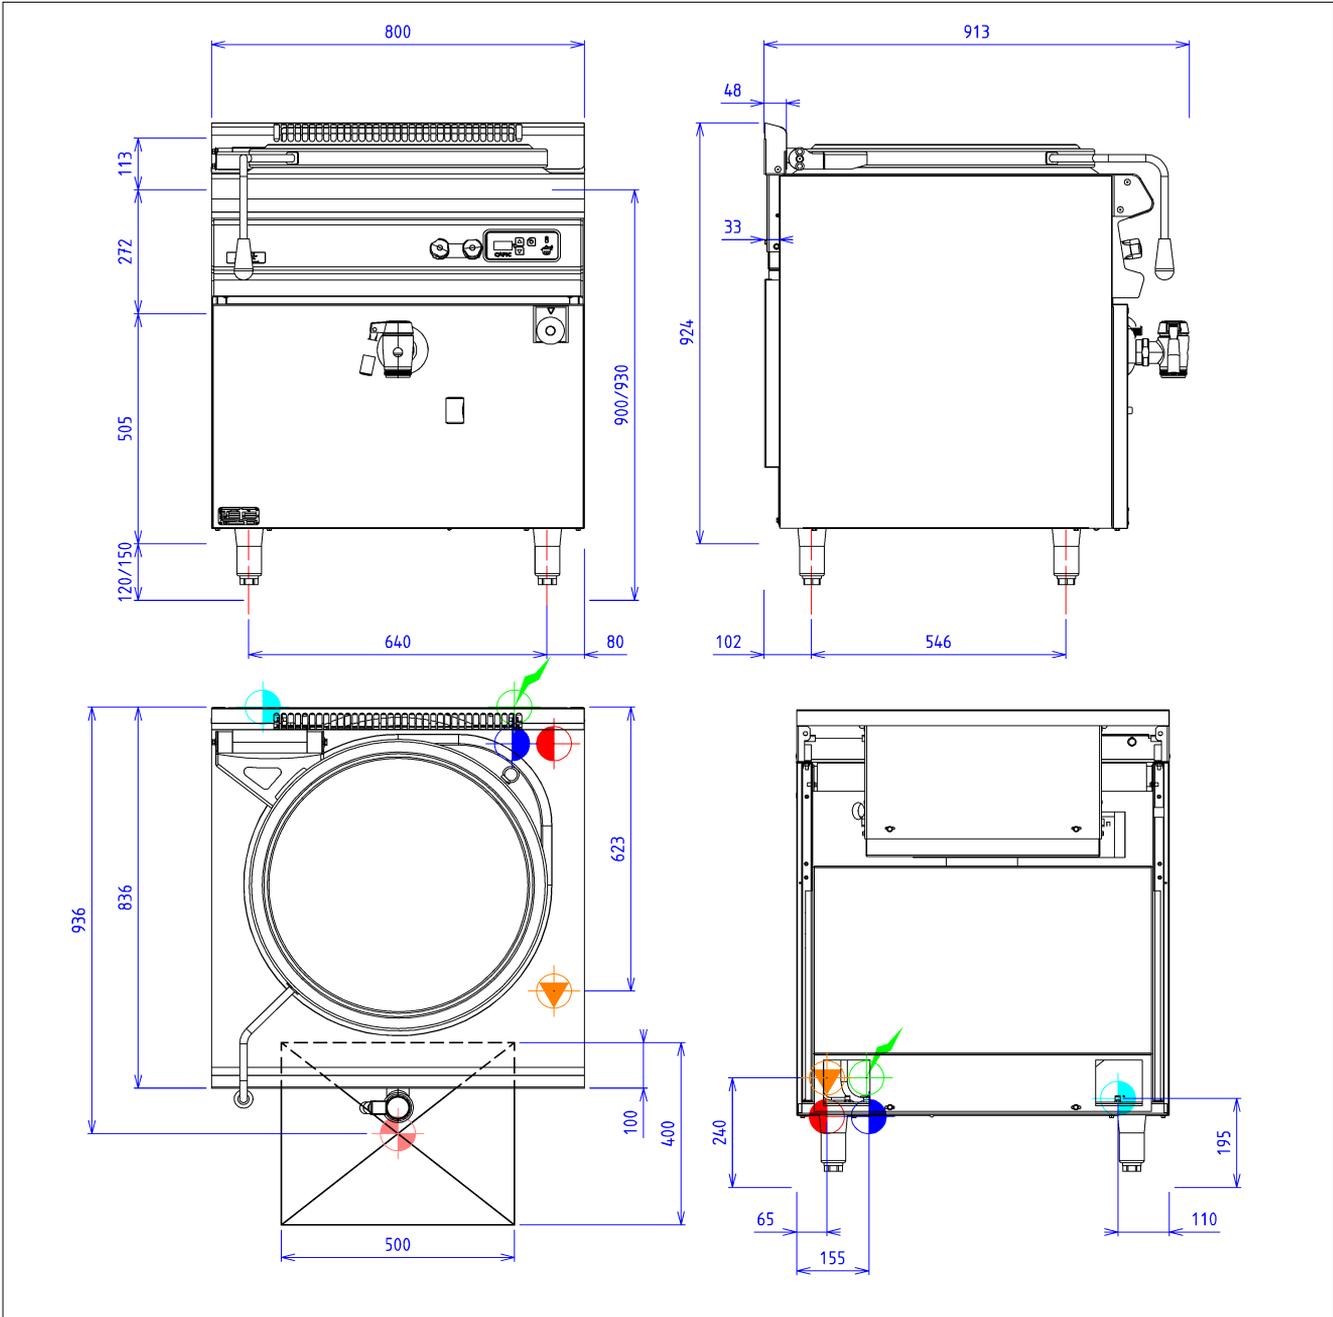

GAS



Gas power : 18kW

Gas connection : 15/21 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.25kW

Elec Réserveation : INTERNAL TERMINAL BOARD - Elec fitting

: 230V SINGLE

Electrical devices standard to the norm EN 60-335

WATER/AIR



Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE



Connection soft water :15/21 FLEXIBLE