

**MANUAL TILT.- HOT & COLD WATER****Characteristics**

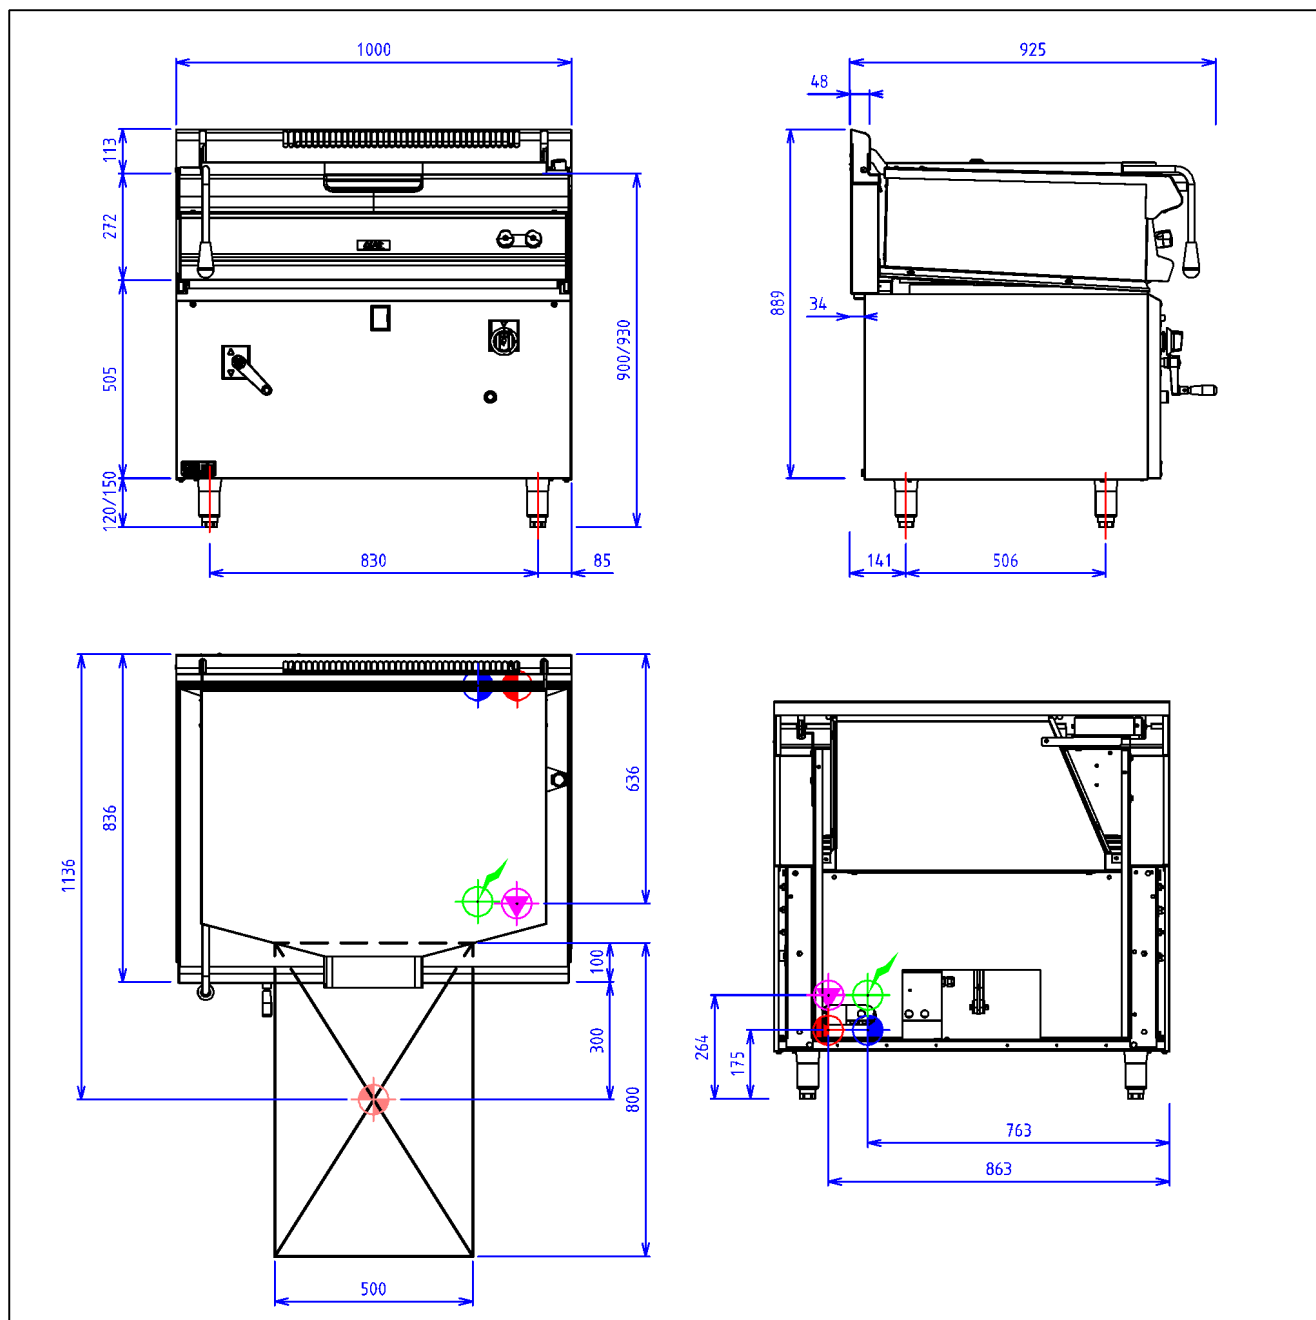
External dimensions : 1000 X 835 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover

**Top**

1 mm stainless steel double lid  
 equipment with echtermann hinge  
 Tank in stainless steel 18.10 thickness 2 mm  
 Bimetal bottom - 12 mm thickness  
 Wide radius angles  
 Wide spout  
 Dimensions : 850x575x250  
 Net capacity : 100 l.  
 Power : 20 kW  
 Heating by gas ramps  
 Control be 4-position tap  
 Security pilot and thermocouple  
 Hot/Cold water supply  
 controlled from front by 1/4 turn tap  
 with ceramic components  
 Manual titling with hand crank  
 Electric ignition

**Options :**

removable frame bratt pan 50 (X295001)  
 spout strainer for 50for model 50 (X295006)  
 removable offset spoutup to 350mm (X295014)  
 offset drain system for more then 350 mm (X295015)  
 sequential thermostatic regulation bratt pan mode (X295017)  
 sequential thermostatic regulation bratt pan and boiling kettle mode (X295018)

**GAS**

Gas power : 20kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

**ELECTRIC**

Electric power : 0.10kW

Elec Réserve : INTERNAL TERMINAL BOARD - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335

**WATER/AIR**

Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE