



30L REMOVABLE ALU KETTLE


OPEN BURNER AT THE FRONT

Characteristics

External dimensions : 500 X 1000 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top

Boiling kettle at the back
 Aluminum kettle 30 liters
 Dimensions: Ø360x300
 Regulation by 3-position tap
 Security by pilot light and thermocouple
 Circular burner heating
 Power: 7.5 kW
 Electric ignition
 Removable burner with pilot flame
 Power 6kW
 Security by pilot light and thermocouple
 Pan support in stainless steel dimensions: 370x315
 Electric ignition

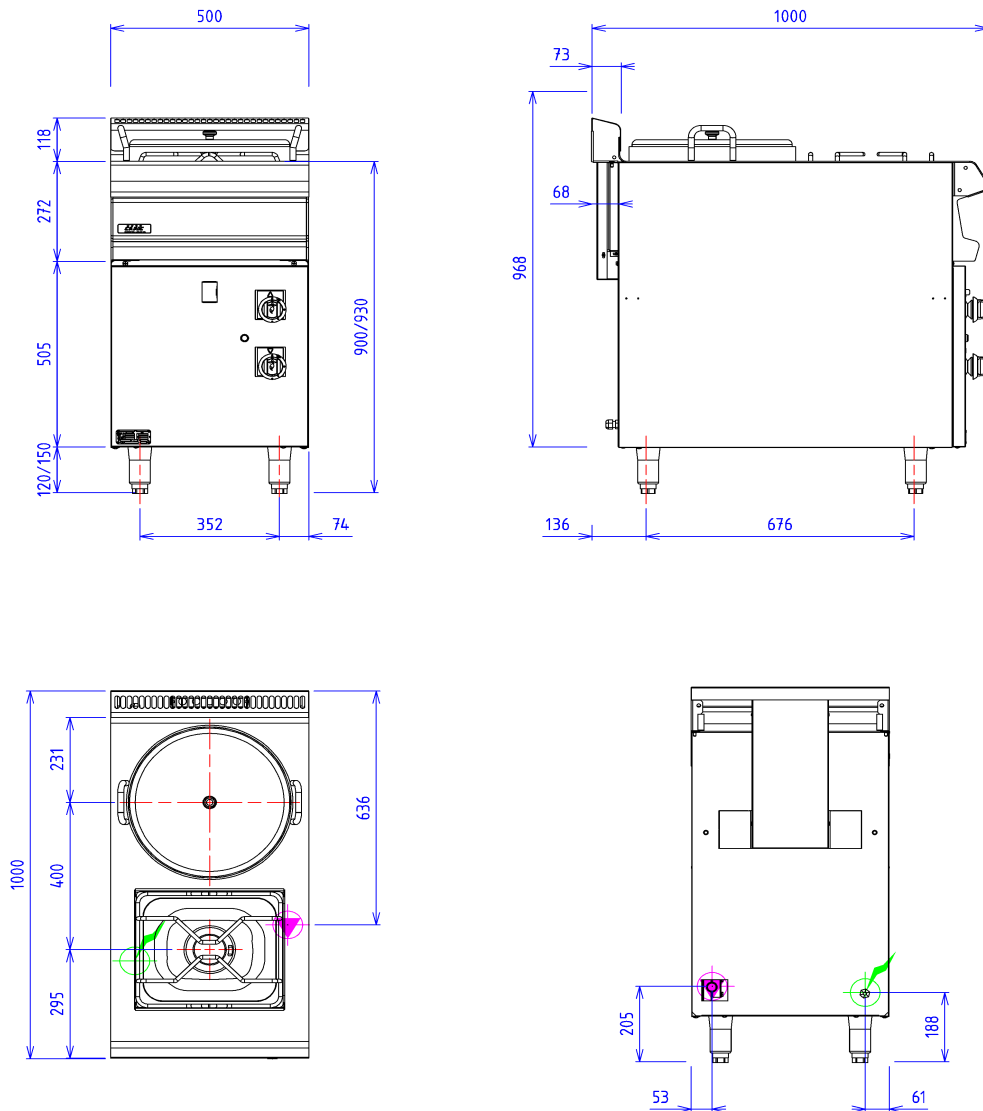

GAS



Gas power : 13.50kW

Gas connection :

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.03kW

Elec Réserve : - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335