



The reference in catering
equipement



30L REMOVABLE ALU KETTLE

OPEN BURNER AT THE BACK

Characteristics

External dimensions : 500 X 1000 X 900

Stainless steel top 18.10 planetary planetary brushed finish

Top thickness : 3 mm

body 1 mm in planetary brushed stainless steel

Structure : 2 mm in stainless steel

Stand with composite feet of 150 adjustable in height

folded front edge radius 20 mm

Back edge forming a chimney cover

Front without any visible screw

Top

Boiling kettle on the front

Aluminum kettle 30 liters

Dimensions: Ø360x300

Regulation by 3-position tap

Security by pilot light and thermocouple

Circular burner heating

Power: 7.5 kW

Electric ignition


Removable burner with pilot flame

Power 6kW

Security by pilot light and thermocouple

Pan support in stainless steel dimensions: 370x315

Electric ignition

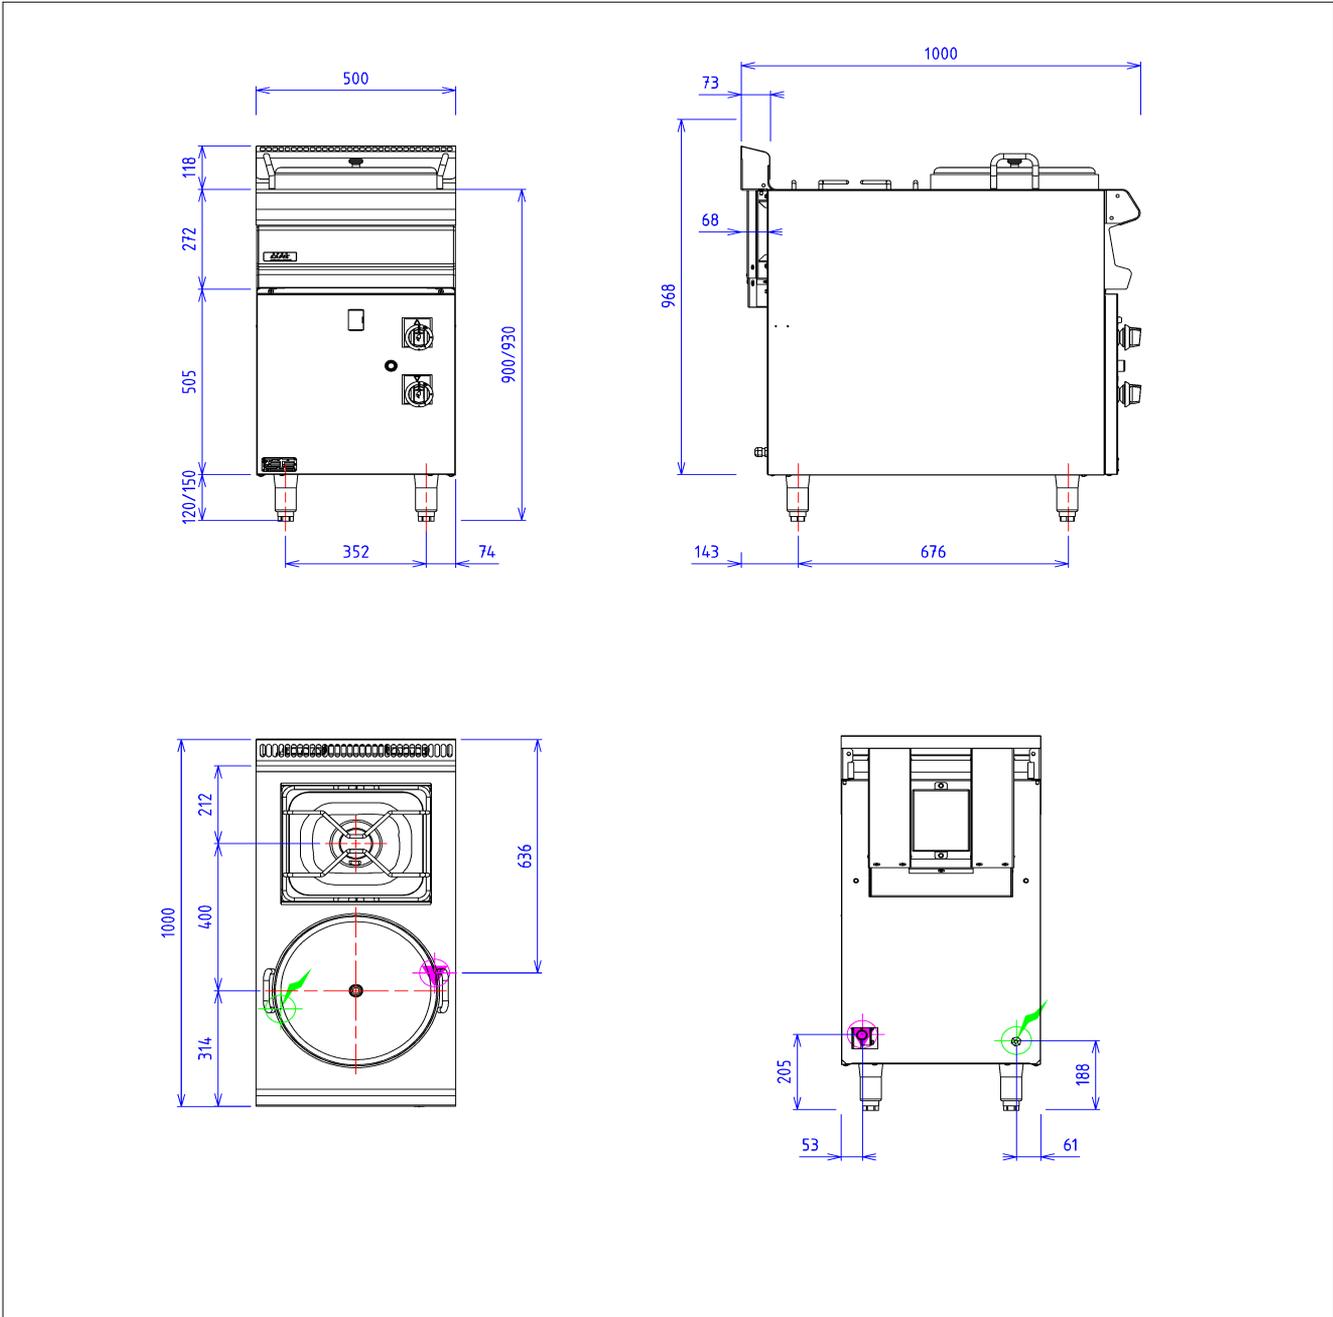

GAS



Gas power : 13.50kW

Gas connection :

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC



Electric power : 0.03kW

Elec Réserveation : - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335