



80L ROUND ALU KETTLE

WITHOUT DRAIN VALVE

**Characteristics**

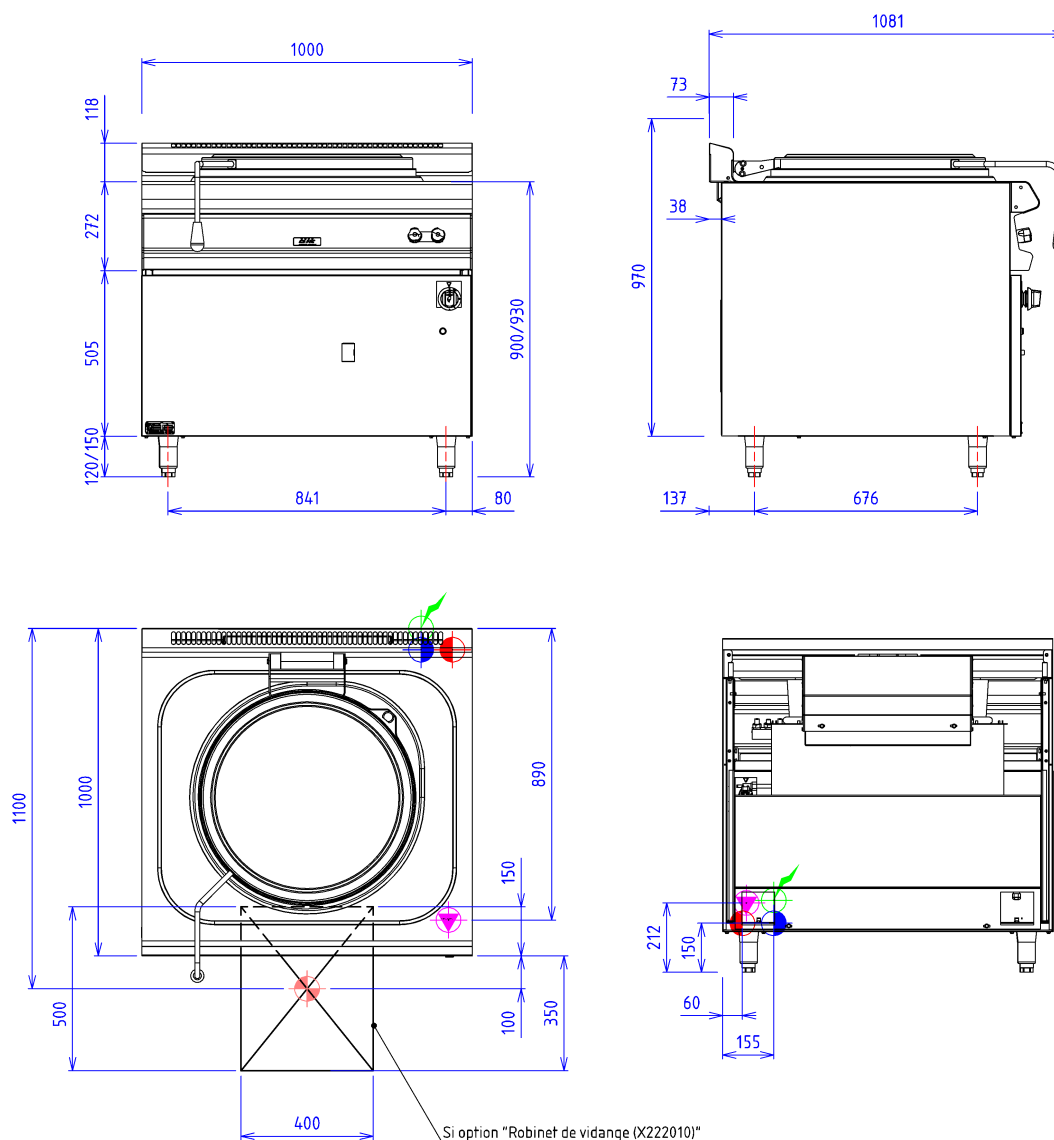
External dimensions : 1000 X 1000 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 Top thickness : 3 mm
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover
 Front without any visible screw

Top

1 mm stainless steel lid together with hinge
 Kettle made of food grade aluminum
 Dimensions (ØxP) : 600x360
 net capacity : 90 l.
 Power: 18,5 kW
 Lid handle with insulated end
 HW/CW supply by fixed tap
 controlled on the front by 1/4 turn tap
 with ceramic components
 Heating by gas ramps
 Control by 4-positions gas valve
 Security pilot and thermocouple
 Wide radius angles
 Electric ignition

Options :

insulated splash guard (X221007)
 claie de fond pour cuvecarree 160l et 200l (X221506)
 drain tap for kettlealuminium round kettle (X222010)
 regul. thermost. seq. electron (X223003)
 offset drain pipefor boiling kettle (X901802)

**GAS**

Gas power : 18.50kW

Gas connection :

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

ELECTRIC

Electric power : 0.03kW

Elec Réserveation : - Elec fitting : 230V SINGLE

230V SINGLE(Si option électrique sélectionnée)

Electrical devices standard to the norm EN 60-335