

## KETTLE 500L RECTANG STAINLESS STEEL 304

### DRAIN VALVE - THERMOSTAT



### Characteristics

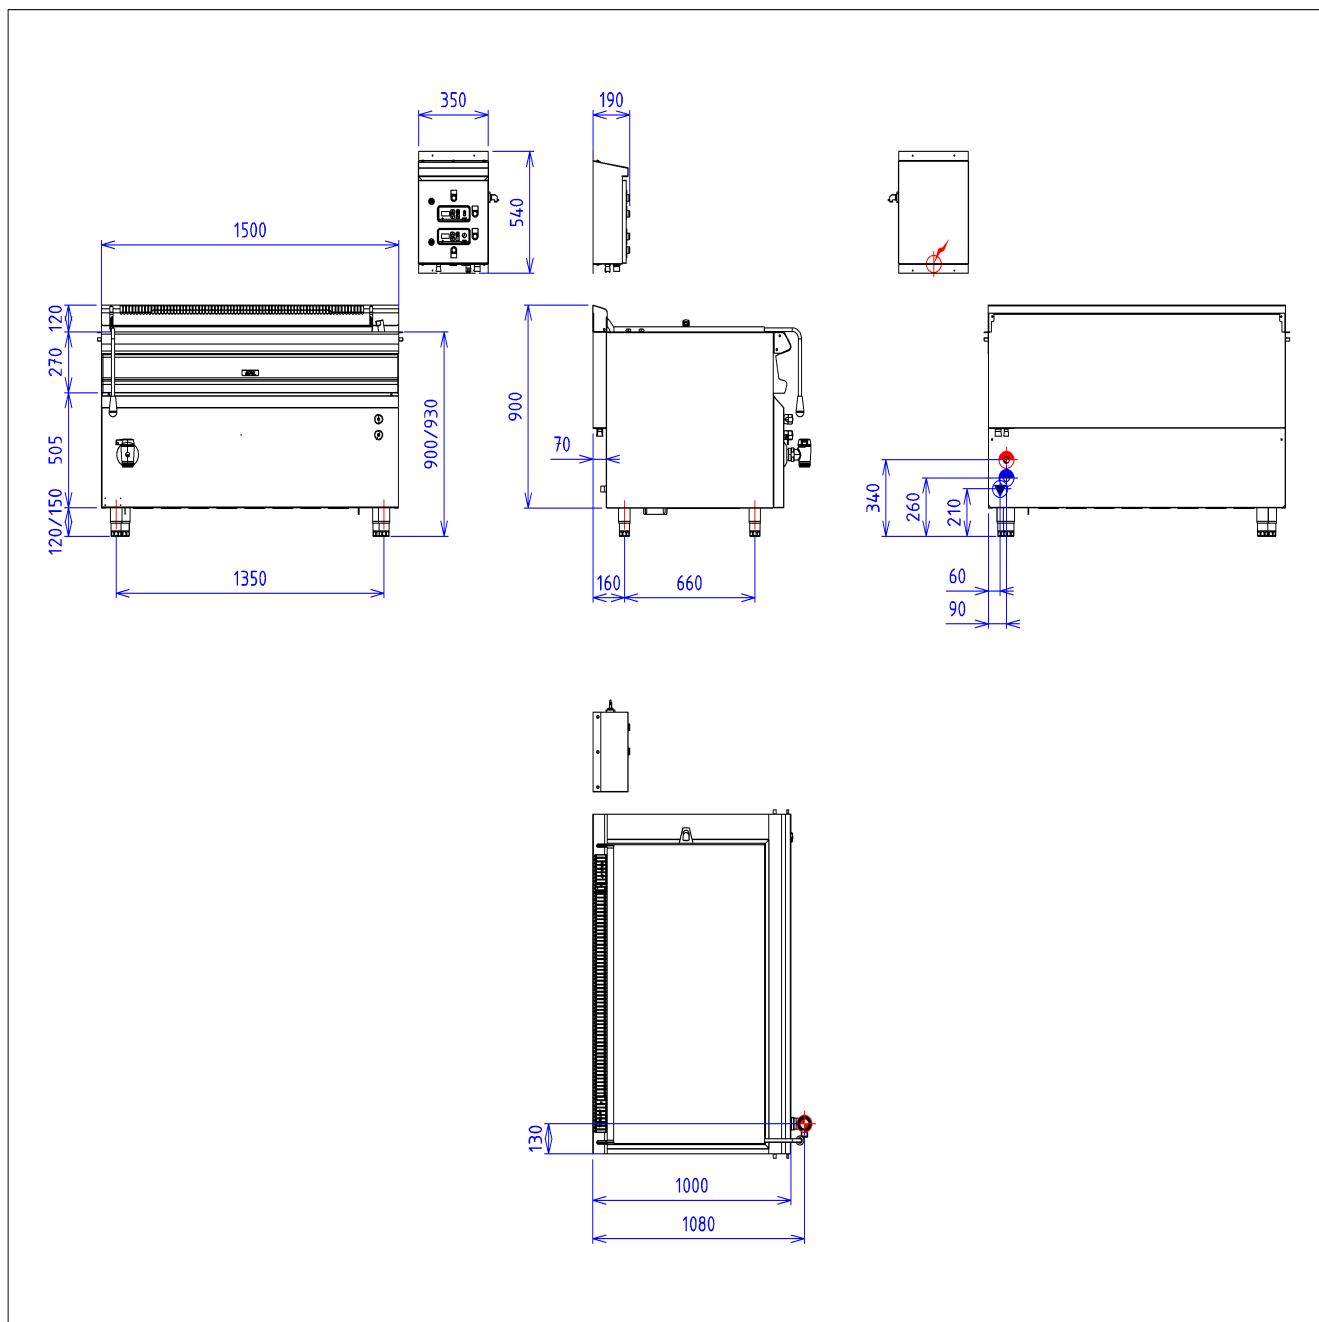
External dimensions : 1500 X 1000 X 900  
 Stainless steel top 18.10 planetary planetary brushed finish  
 Top thickness : 3 mm  
 body 1 mm in planetary brushed stainless steel  
 Structure : 2 mm in stainless steel  
 Stand with composite feet of 150 adjustable in height  
 folded front edge radius 20 mm  
 Back edge forming a chimney cover  
 Front without any visible screw  
 Wall box with machine control  
 Digital thermostatic regulation

### Top

1 mm stainless steel double lid  
 equipment with echtermann hinge  
 Cuve in stainless steel 18.10 welded on the top  
 Bottom thickness 5 mm  
 Dimensions : 1285x725x530  
 net capacity : 500 L  
 Power: 45 kW  
 Lid handle with insulated end  
 HW/CW supply by fixed tap  
 controlled on the front by 1/4 turn tap  
 with ceramic components  
 Drain Valve 40/49 with retractable handle  
 Heating by gas ramps  
 Ignition and safety by ionisation electrode

### Options :

offset drain pipe for boiling kettle (X901802)  
 316L stainless steel kettle (X904001)

**GAS**

Gas power : 45.00kW

Gas connection : 20/27 MALE TAPERING

Gas appliances complying with standard NF EN 203.EN 437

Gas Directive 2009/142/EC

**ELECTRIC**

Electric power : 0.25kW

Elec Réserve : - Elec fitting : 230V SINGLE

Electrical devices standard to the norm EN 60-335

**WATER/AIR**

Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE