

CATERING RANGE BRAISING PAN 50 ELEC.

ELEC TILTING - HW/CW SUPPLY

Characteristics

External dimensions : 1000 X 1000 X 900
 Stainless steel top 18.10 planetary planetary brushed finish
 body 1 mm in planetary brushed stainless steel
 Structure : 2 mm in stainless steel
 Stand with composite feet of 150 adjustable in height
 folded front edge radius 20 mm
 Back edge forming a chimney cover




Top

Thermostatic regulation at the bottom of the tank
 1 mm stainless steel double lid
 equipment with echtermann hinge
 Tank in stainless steel 18.10 thickness 2 mm
 Bimetal bottom - 12 mm thickness
 Wide radius angles
 Wide spout
 Dimensions : 850x575x250
 Net capacity : 100 l.
 Power : 15 kW
 Control by energy regulator
 Heating by stainless steel armored high performance
 heating elements.
 Hot/Cold water supply
 controlled from front by 1/4 turn tap
 with ceramic components
 Tilting by electric actuator

Options :

removable frame bratt pan 50 (X295001)
 spout strainer for 50for model 50 (X295006)
 removable offset spoutup to 350mm (X295014)
 digital electrical controls tilting bratt pan (X901033)
 sequential thermostatic regulation kettle mode in addition with bratt pan mode (X295016)

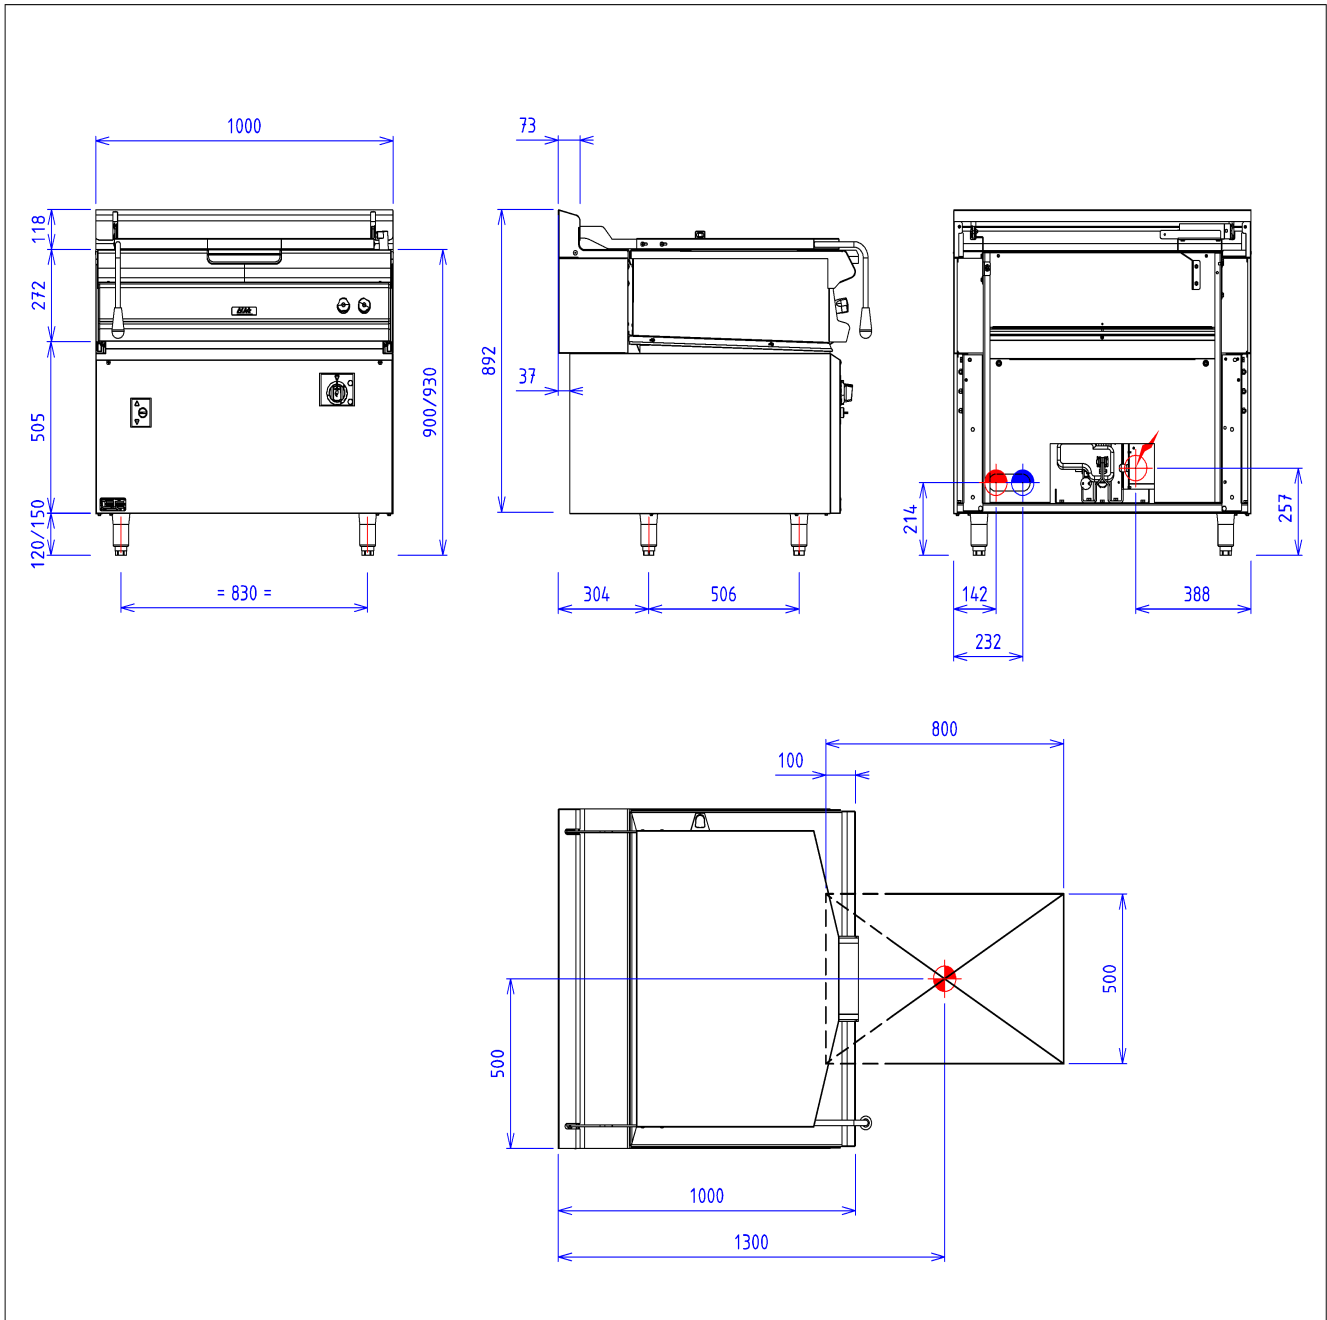

ELECTRIC



Electric power : 15.50kW

Elec Résevation : INTERNAL TERMINAL BOARD - Elec fitting
: 400V THREE phases + NEUTRAL

Electrical devices standard to the norm EN 60-335

WATER/AIR



Hot water fitting :15/21 FLEXIBLE



Cold water fitting :15/21 FLEXIBLE